


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
AO			The first edition released	2014.04.18	SQL

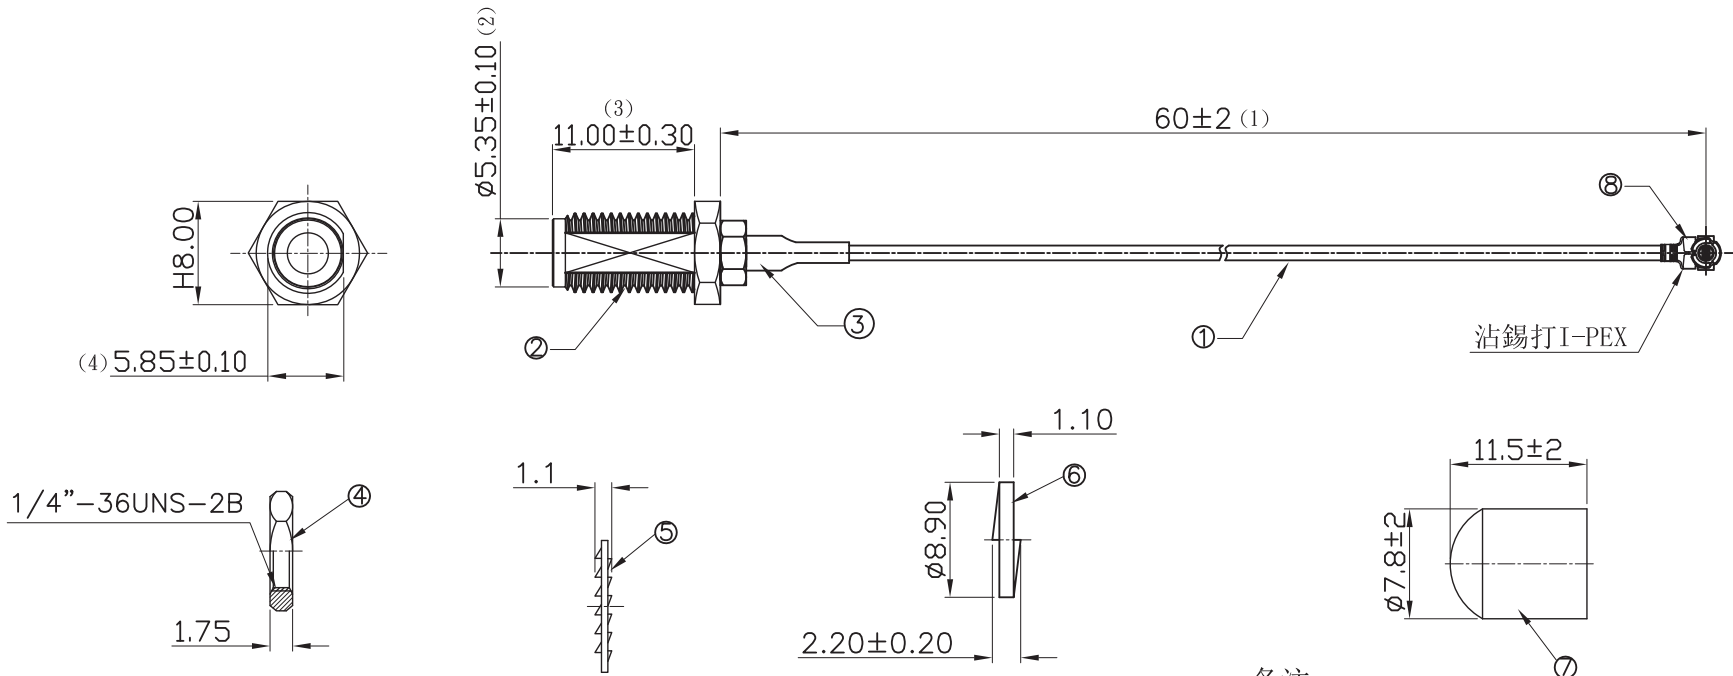

备注:

1. 频率: 0~6 GHZ;
2. 阻抗: 50 Ohm;
3. VSWR: 2.0(Max);
4. 线材与接头保持力: 4kg(Min),
线材与端子保持力: 1.3kg(Min);
5. 热缩套管为 $\phi 2.00 \times 15.00$ mm;
6. 带"(XX)" 尺寸为FAI,带" "尺寸重点尺寸,
带" "尺寸为CPK尺寸;
7. 包装规范: 25PCS/扎, 50PCS/包。

8	I-PEX	1.13 I-PEX镀金 (A2端子)	1
7	防尘帽	OD7.8*11.5, 橡胶 红色	1
6	垫片	OD8.90* 1.00, 青铜C3604 镀金2u''	1
5	九齿华司	OD10.2*1.1, 青铜C3602 镀金2u''	1
4	螺母	H8.0*1.75, 青铜C3604 镀金2u''	1
3	热缩套管	OD2.50*20mm黑色热缩管收缩比例为2:1	1
2	SMA头	SMA母座母针, 牙长11镀金 (光华)	1
1	CABLE	1.13镀锡深灰色芯线, L=65mm	1
NO	ITLM	DESCRIPTION	Q'TY

COPLIANCE WITH THE REQUIEMENT ☒ RoHS ☐ HF ☐ SONY00259 ☐ OTHER
* NO USING RESTRICTED AND BANNED SUBSTANCE

客户代码: H090

DIM	TOL	DIM	TOL
X.	±0.30	X'.	±4.0"
X.X	±0.20	X.X'	±3.0"
X.XX	±0.10	X.XX'	±2.0"
X.XXX	±0.05	X.XXX'	±1.0"

东莞市涪程电子科技有限公司

DRAW NO.	DATE	DRAW NAME:	CABLE系列
DESIGN:	SQL	2014.04.18	RG1.13深灰镀锡线焊SMA母座母针+I-PEX L=65mm
CHECK:		FILE:	P/N NO. 310111-06524-1R
APPROVED:		MODEL:	UNIT: mm SHEET: N/A
		REV. AO	SCALE N/A