


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			The first edition released	2014.12.03	SQL

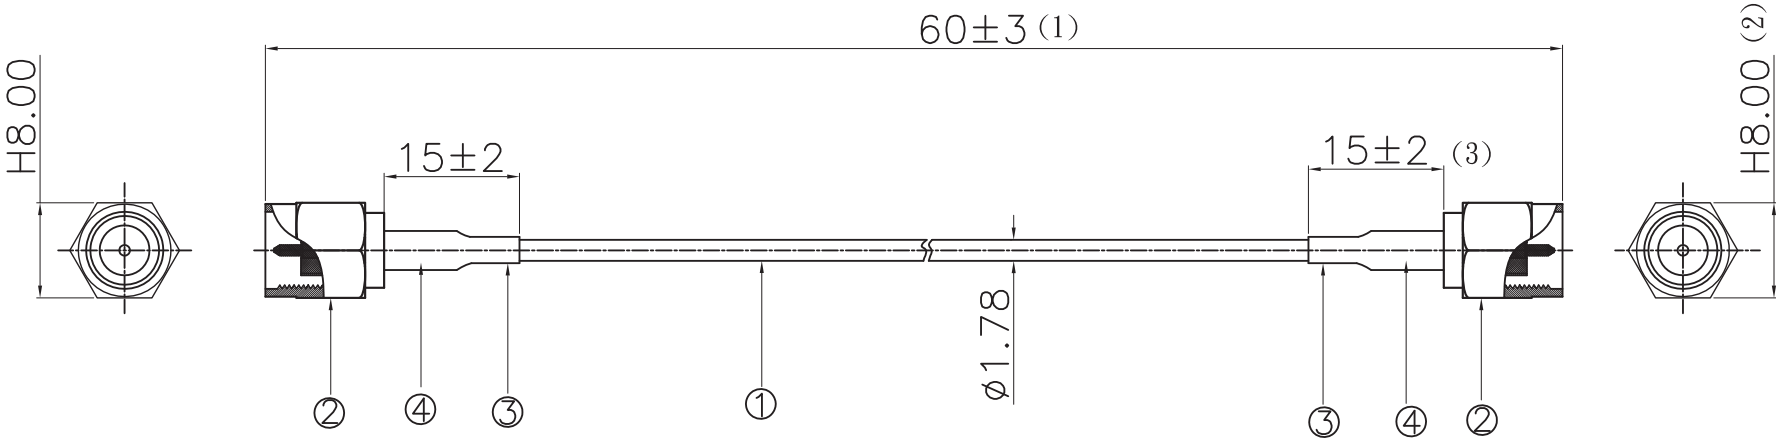

- 备注:
1. 频率: 0~6 GHZ
 2. 阻抗: 50 Ohm
 3. VSWR: 2.0(Max)
 4. 插损: 2.0db(Max)
 5. 线材与接头保持力: 4kgf(Min)
 6. 热缩套管为Ø3.5 (E329530)

4	小铜管	OD4.00*9.20mm	2
3	热缩套管	OD3.50*15mm黑色热缩管收缩比例为2:1	2
2	SMA头	SMA公座公针, 镀金	2
1	CABLE	RG178棕色双银线, L=70mm	1
NO	ITLM	DESCRIPTION	Q'TY

COPLIANCE WITH THE REQUIEMENT ☒ RoHS ☐ HF ☐ SONY00259 ☐ OTHER
* NO USING RESTRICTED AND BANNED SUBSTANCE

DIM	TOL	DIM	TOL
X.	±0.30	X'.	±4.0°
X.X	±0.20	X.X°	±3.0°
X.XX	±0.10	X.XX°	±2.0°
X.XXX	±0.005	X.XXX°	±1.0°

东莞市涪程电子科技有限公司			
DRAW NO.		DATE	DRAW NAME: CABLE系列
DESIGN:	SQL	2014.12.03	RG178双银线两端焊SMA公头公针 L=60mm
CHECK:			FILE:
APPROVED:			MODEL:
			REV. A0 SCALE N/A
			P/N NO. 310202-07095-1R
			UNIT: mm SHEET: N/A