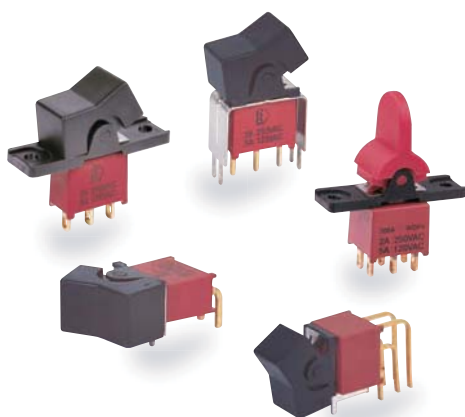


3A
Rocker Switches

SPECIFICATIONS

CONTACT RATING: Dependent upon contact material See Page 63.

MECHANICAL LIFE: 30,000 make-and-break cycles.

CONTACT RESISTANCE: 10 mΩ max. initial @ 2-4VDC

100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000 M Ω min.

DIELECTRIC STRENGTH: 1,000 Vrms min.@sea level.

OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS

CASE & BUSHING : Glass filled nylon 6/6, flame retardant, heat stabilized (UL94V-0).

ACTUATOR: Nylon, black std. Internal O-ring seal standard with all actuators.

FRAME: Spring steel, black std.

SWITCH SUPPORT: Brass or steel, tin plated.

ACTUATOR PIVOT & MOUNTING BRACKET: Nylon.

ACTUATOR PIVOT RETAINER: Stainless steel.


TERMINAL/CONTACT: Silver or gold plated copper alloy.

(See Page 63)

HOW TO ORDER

MODEL NO.	ACTUATOR	FRAME COLOR	ACTUATOR COLOR	CAP MARKING	TERMINATIONS	CONTACT MATERIAL	SEAL	ROHS SOLDERING
-----------	----------	----------------	-------------------	----------------	--------------	---------------------	------	-------------------

See below

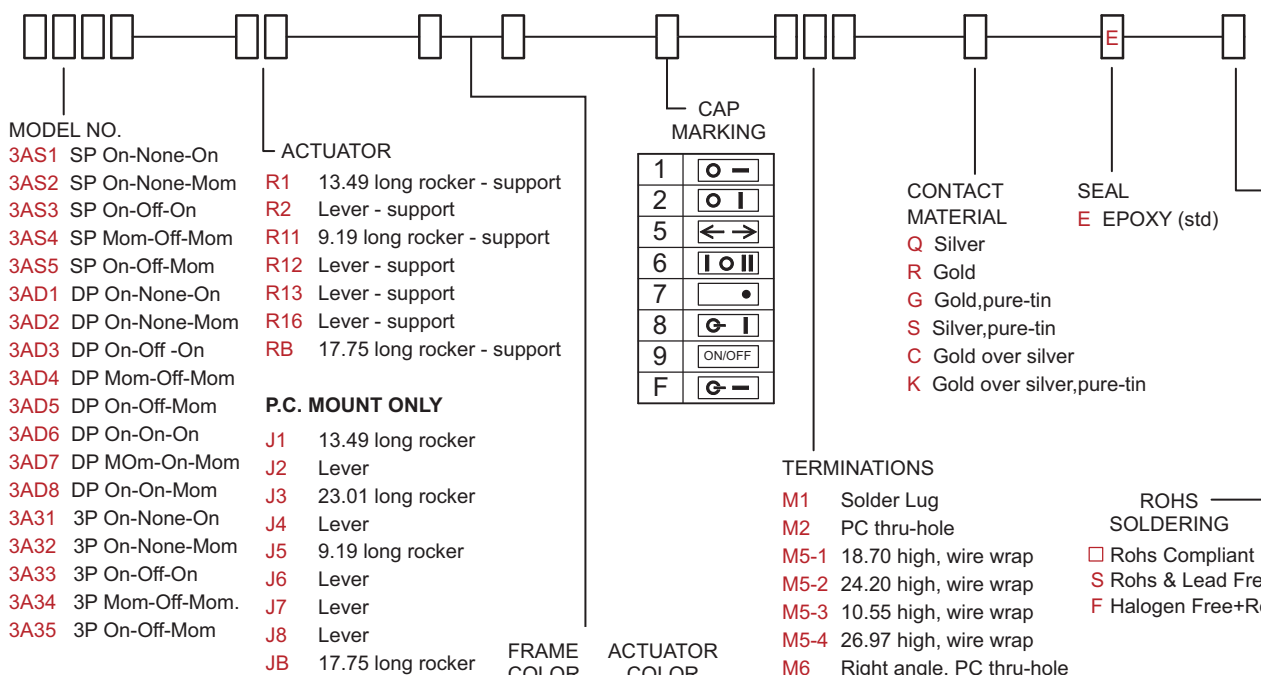

See below



ITEM NO	COLOR
1	White
2	Black (Std)
3	Red
4	Orange
5	Yellow
6	Green
7	Blue
8	Brown
9	Gray


SWITCH FUNCTION

NO. POLES	UL/CSA MODEL NO.	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS / SCHEMATIC		
			POS.1	POS.2	POS.3	POS.1	POS.2	POS.3
SP	Q13A11	3AS1	ON	NONE	ON		N/A	2-1
	Q13A12	3AS2	ON	NONE	MOM		OPEN	
	Q13A13	3AS3	ON	OFF	ON			
	Q13A14	3AS4	MOM	OFF	MOM			
	Q13A15	3AS5	ON	OFF	MOM			
DP ▲ ▲	Q13A21	3AD1	ON	NONE	ON		N/A	2-1,5-4
	Q13A22	3AD2	ON	NONE	MOM		OPEN	
	Q13A23	3AD3	ON	OFF	ON			
	Q13A24	3AD4	MOM	OFF	MOM			
	Q13A25	3AD5	ON	OFF	MOM	2-3,5-6	2-3,5-4	2-1,5-4
	Q13A26	3AD6	ON	ON	ON			
	Q13A27	3AD7	MOM	ON	MOM			
	Q13A28	3AD8	ON	ON	MOM			
3P	Q13A31	3A31	ON	NONE	ON		N/A	2-1,5-4,8-7
	Q13A32	3A32	ON	NONE	MOM		OPEN	
	Q13A33	3A33	ON	OFF	ON			
	Q13A34	3A34	MOM	OFF	MOM			
	Q13A35	3A35	ON	OFF	MOM			

MOM=MOMENTARY




▲ Please check the availability in advance before order

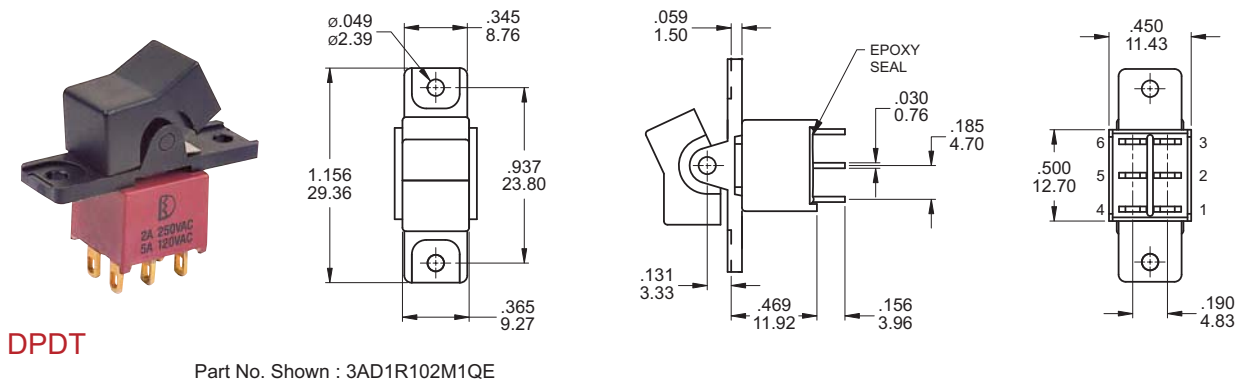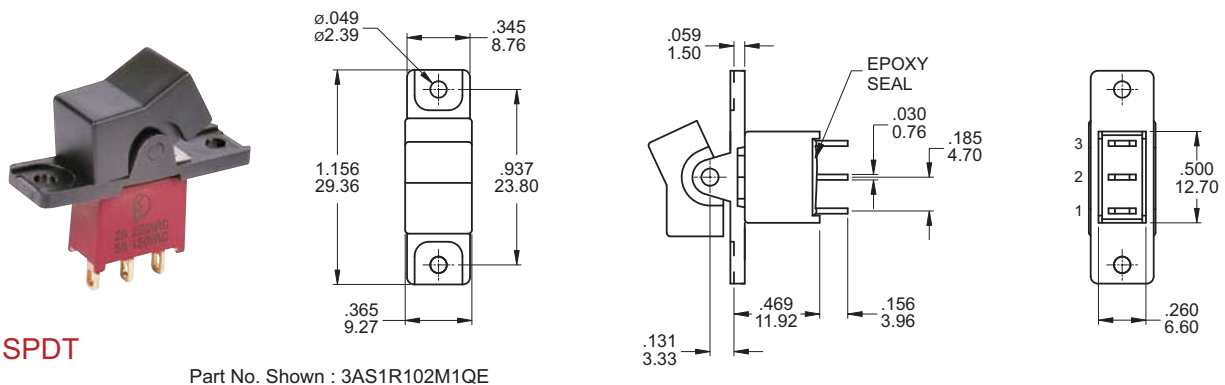POLE OPTIONS

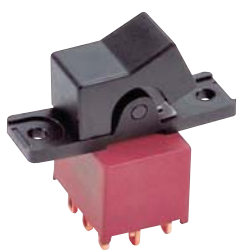



3PDT

Part No. Shown : 3A31R102M1RE

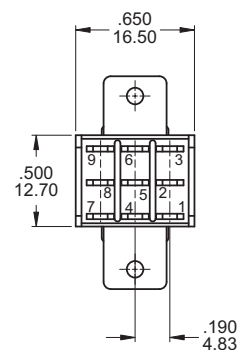
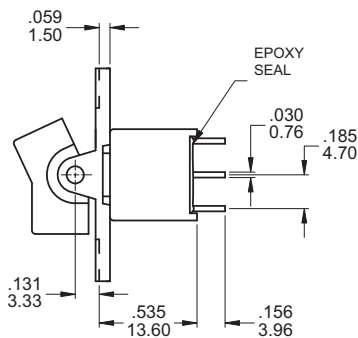



ACTUATOR OPTIONS FOR PANEL MOUNT ONLY



R1

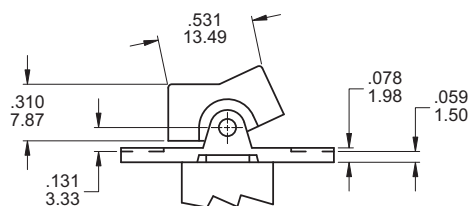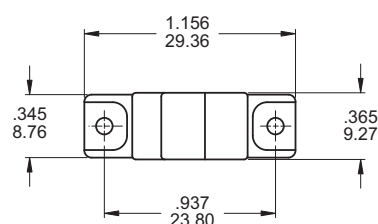



R11





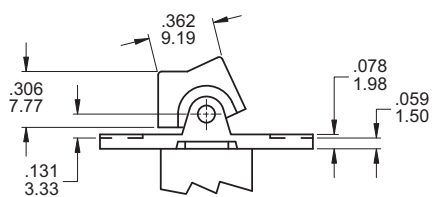
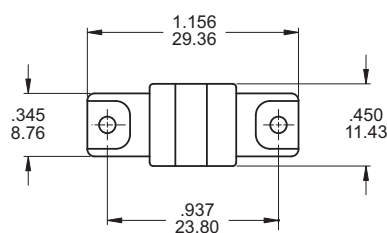



R2

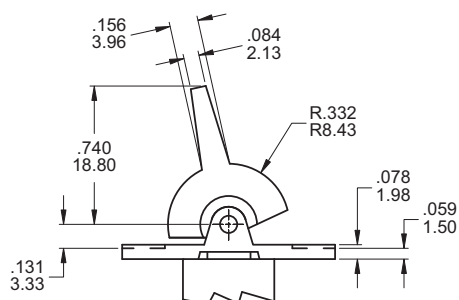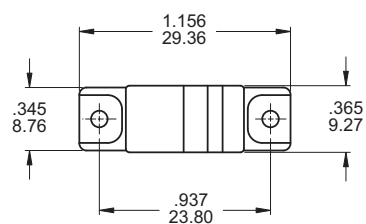


R12

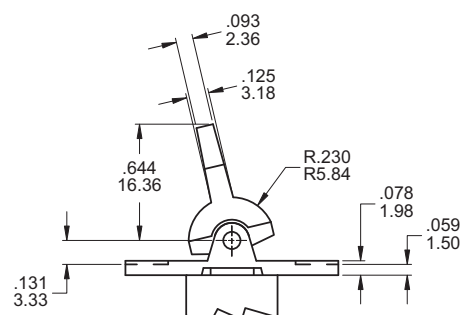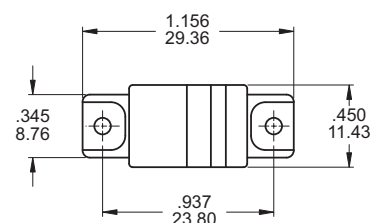


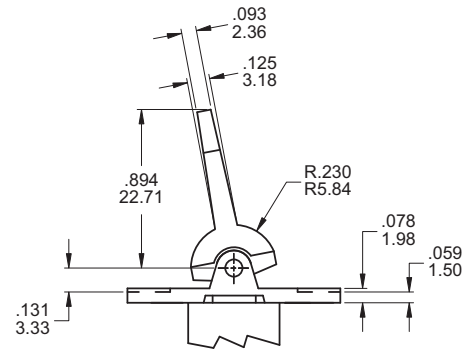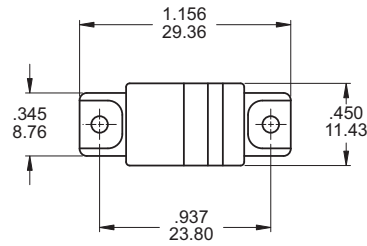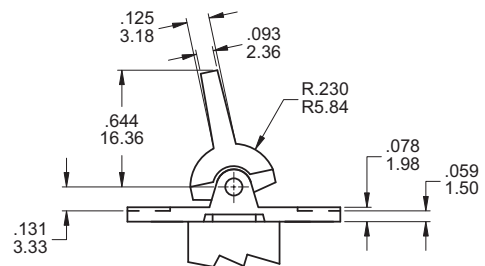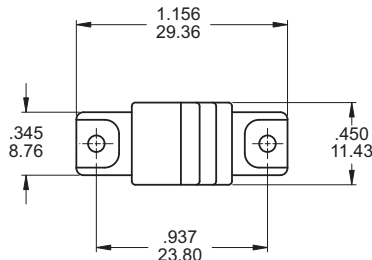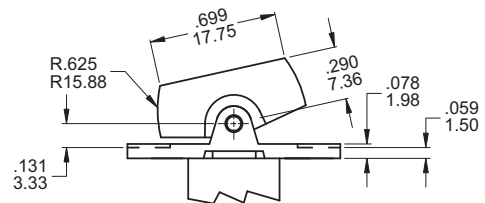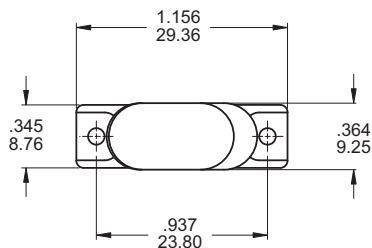R13**R16****RB****TERMINATION OPTIONS****M1 SOLDER LUG**


THK .030(0.76)

M2 PC THRU-HOLE

THK .030(0.76)

M3 QUICK CONNECT

THK .030(0.76)

M5 WIRE WRAP

THK .030(0.76)

OTHER TERMINATION OPTIONS



- M6 RIGHT ANGLE P.C. MOUNT
- M7 RIGHT ANGLE P.C. MOUNT
- VS2 VERTICAL BRACKET P.C. MOUNT
- VS3 VERTICAL BRACKET P.C. MOUNT

OPTION CODE	DIM. 'A'
M5-1	.736 (18.70)
M5-2	.953 (24.20)
M5-3	.415 (10.55)
M5-4	1.062 (26.97)



ACTUATOR OPTIONS FOR P.C. MOUNT ONLY

3A
Rocker Switches



J1





J6





J2





J7





J3

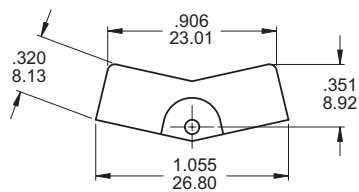



J8





J4

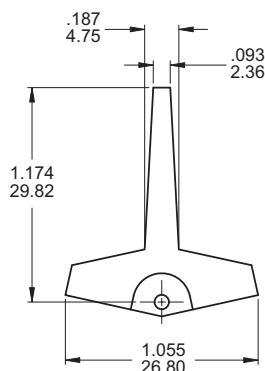

JB

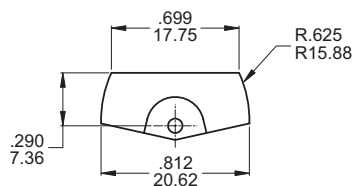


J5




Actuator colors:


ITEM NO	COLOR
1	White
2	Black (Std)
3	Red
4	Orange
5	Yellow
6	Green
7	Blue
8	Brown
9	Gray

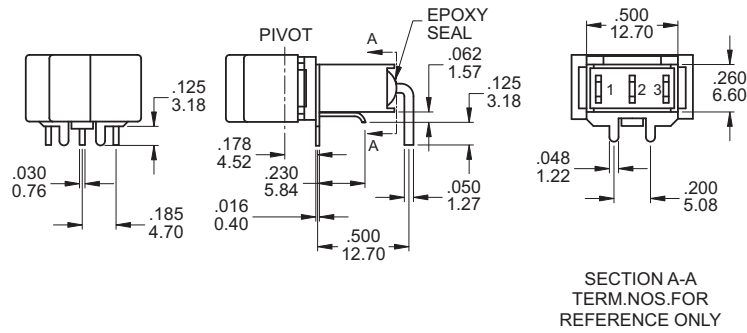M6


P.C. MOUNTING

**SPDT**



Part No. Shown : 3AS1J102M6QE

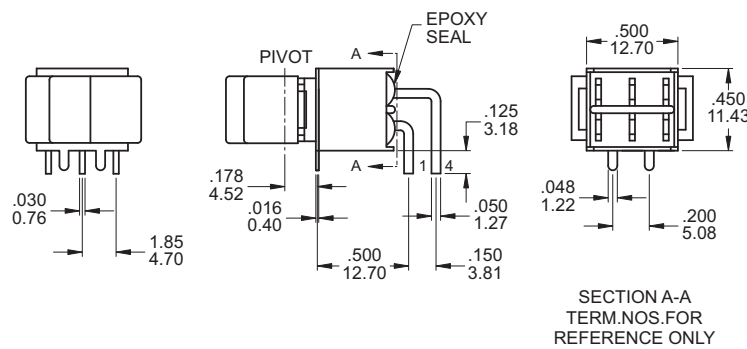M6


P.C. MOUNTING

**DPDT**



Part No. Shown : 3AD1J102M6QE

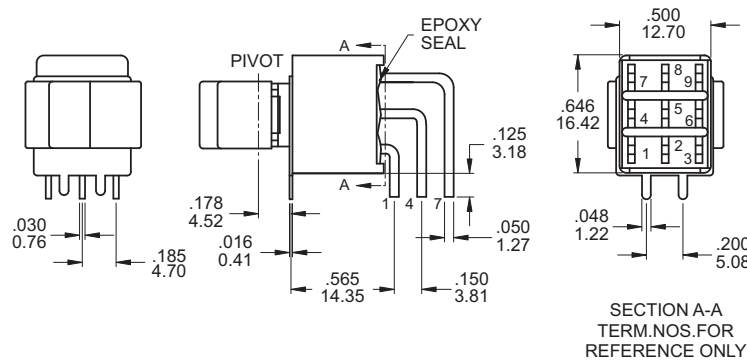M6


P.C. MOUNTING

**3PDT**

Part No. Shown : 3A31J102M6RE

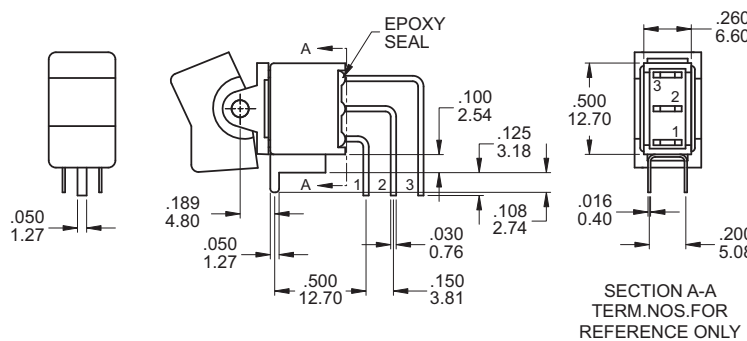M7

P.C. MOUNTING


**SPDT**

Part No. Shown : 3AS1J102M7RE




3A
Rocker Switches

M7




DPDT


Part No. Shown : 3AD1J102M7RE

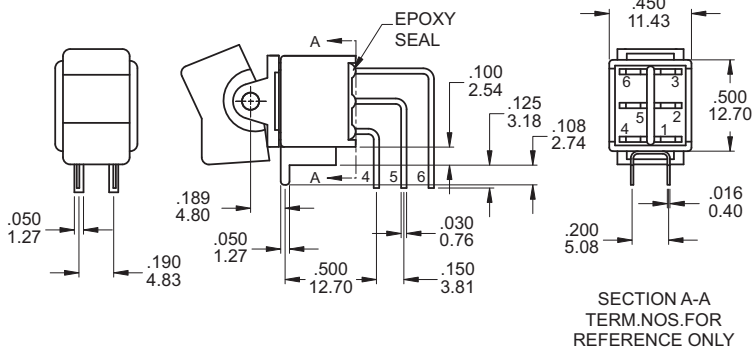

P.C. MOUNTING




M7




3PDT

Part No. Shown : 3A31J102M7RE

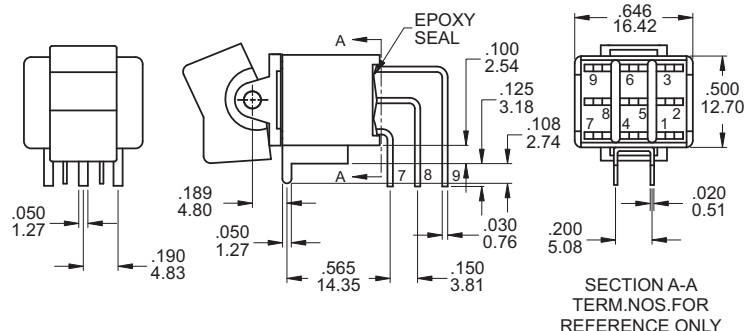

P.C. MOUNTING




VS2 - VS3




SPDT

Part No. Shown : 3AS1J102VS2QE

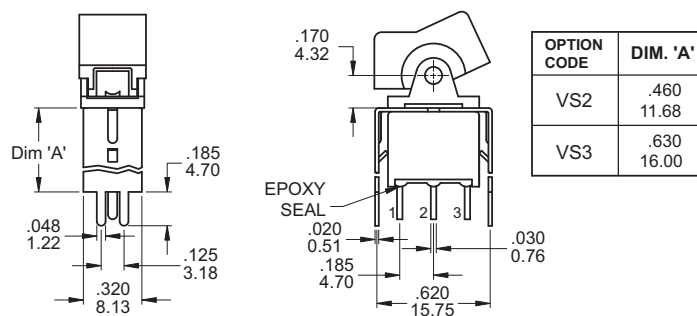

P.C. MOUNTING




VS2 - VS3




DPDT

Part No. Shown : 3AD1J102VS2QE

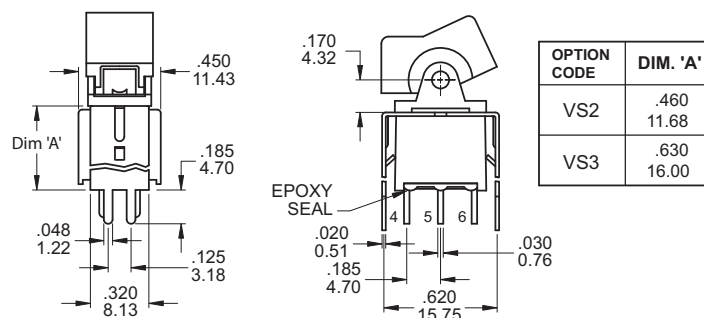


P.C. MOUNTING



VS2 - VS3




3PDT

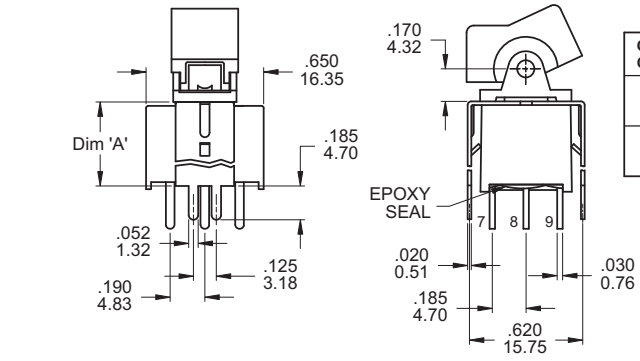

OPTION CODE	DIM. 'A'
VS2	.460 11.68
VS3	.630 16.00

P.C. MOUNTING




Part No. Shown : 3A31J102VS2RE

3A
Rocker Switches

SNAP-IN TERMINATION OPTIONS

M6N

V2N

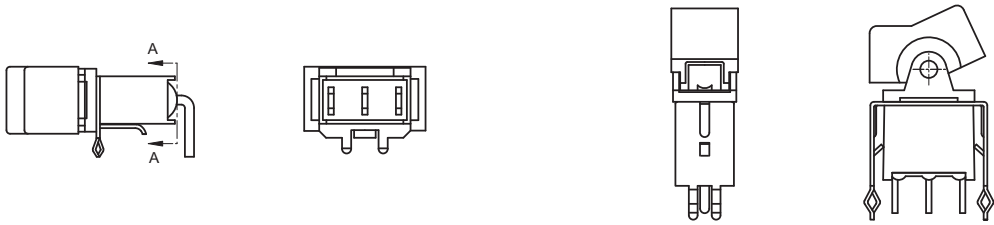

CONTACT MATERIAL OPTIONS

	CONTACT PLATING	TERMINAL PLATING	RATINGS
Q	Silver	Q = Gold flash over silver	5 Amps with resistant load @ 120VAC or 28VDC 2 Amps with resistant load @ 250VAC
S		S = Gold flash over silver,pure - tin	
C	Gold over Silver	C = Gold over silver	
K		K = Gold over silver,pure - tin	
R	Gold	R = Gold	0.4 Volt - Amps (VA) max. @ 20V max. (AC or DC)
G		G = Gold,pure - tin	

SOLDERING PROCESSES

MANUAL SOLDERING : Use soldering iron of 30 watts, controlled at 350°C approximately 5 seconds while applying solder.

WAVE SOLDERING : Recommended Soldering Temperature : 260 ± 5°C
Duration of Solder Immersion : Max 5 sec.
(PCB is 1.6mm in thickness)

SOLDERING : Vapor phase