
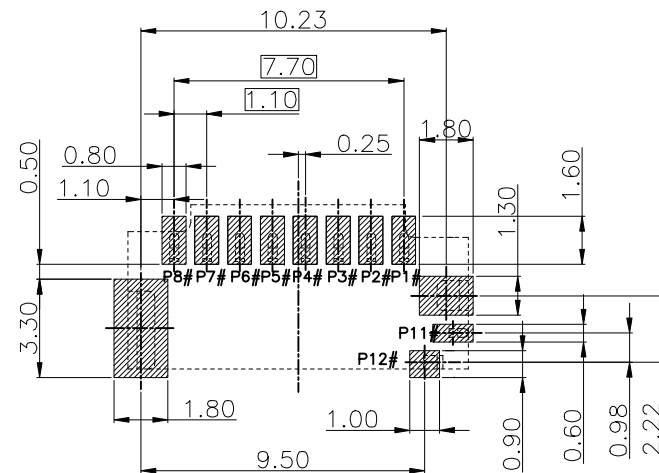
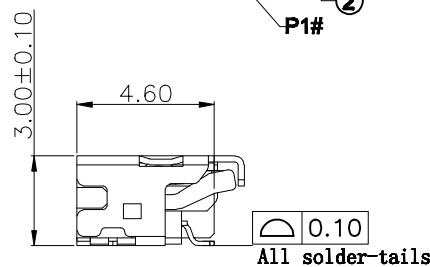
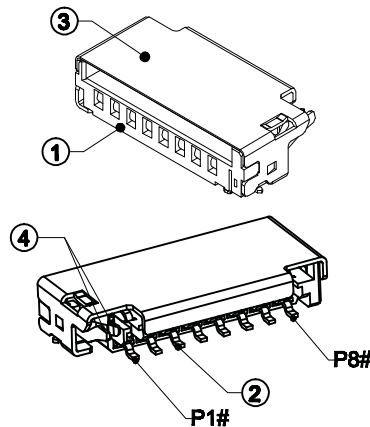
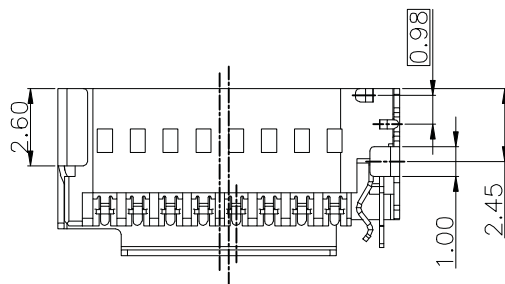
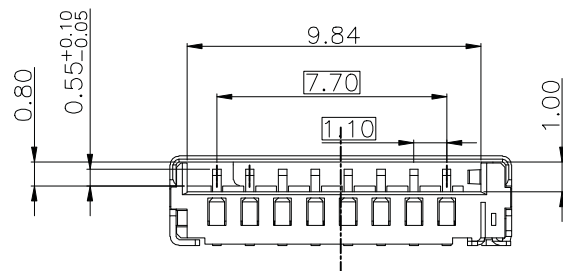


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2011/10/31

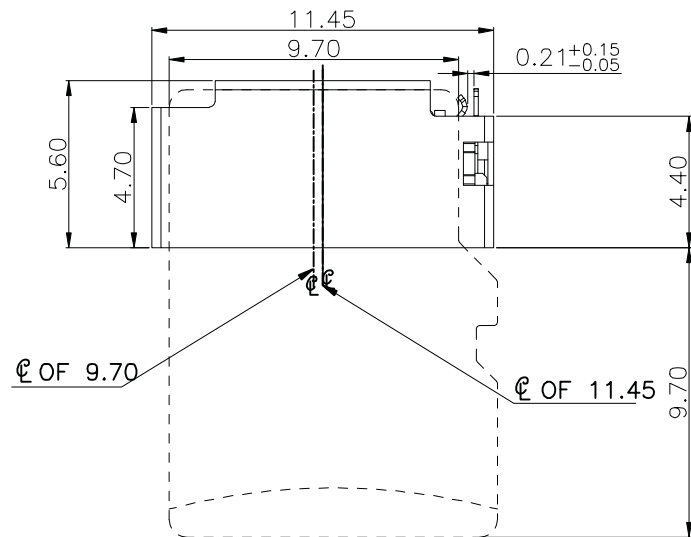

RECOMMENDED PCB LAYOUT
TOL:(±0.05)

BILL OF MATERIAL

ITEM	NAME
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT 0
8	DAT 1
9	GND
10	GND
11	POL
12	DET

ITEM	PART NAME	MATERIAL	FINISH/COLOR	QT'Y
1	HOUSING	LCP S475	BLACK	1 PCS
2	TERMINAL	C5210R-H T=0.15mm	GOLD PLATED ON CONTACT AREA ; GOLD PLATED ON SOLDER TAILS	8 PCS
3	SHELL	SUS201-1/2H T=0.20mm	GOLD PLATED ON SOLDER TAIL,NICKEL UNDER PLATED OVERALL	1 PCS
4	DETECT PIN	C5191R-H T=0.15mm	GOLD PLATED ON CONTACT AREA, MATTE-TIN PLATED ON SOLDER TAILS	2 PCS

GENERAL TOLERANCE	图号	LZA0410-17	设计	raliny.xu	比例	1:1
X.±0.45	x.'±5'	品名	短型 T-Flash CARD	审核	单位	mm
.X±0.35	.x'±2'		10PIN 3.0 无孔	核准	视角	☞
.XX±0.25	.xx'±1'	料号	ATFFS300A01BR002	日期	2015/11/10	版本
.XXX±0.15	.xxx'±0.5'					A0
页数	1/1					

东莞市涪程电子科技有限公司