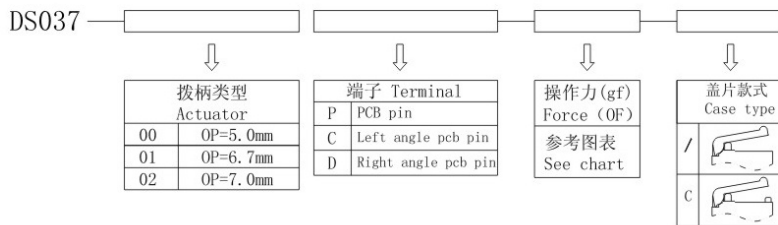


小型微動開關 Miniature Micro Switch

◆ 編號規則 No rules

DS037 — 

撥柄类型 Actuator		端子 Terminal		操作力 (gf) Force (OF)	盖片款式 Case type
00	OP=5.0mm	P	PCB pin	参考图表 See chart	/
01	OP=6.7mm	C	Left angle pcb pin		C
02	OP=7.0mm	D	Right angle pcb pin		


Example: DS037-01P-30-C

DS037 — 01 — P — 30 — C


◆ 規格參數 Specifications

外形尺寸	Dimensions	8.2X2.7
電氣規格	Electrical Specifications	300mA/DC6V
接觸電阻(CR)	Contact resistance (CR)	≤50mΩ
機械壽命	Mechanical life	100,000
電氣壽命	Electrical life	50,000
絕緣電阻(IR)	Insulation Resistance (IR)	≥100MΩ DC250V
耐壓强度(WV)	Compressive strength (WV)	AC250V 1 minute
操作溫度	Operating temperature	-25℃~+85℃
儲存濕度	Storage humidity	<85%RH
操作力值	Operating force value	10—45gf

◆ 端子類型 Terminal Type

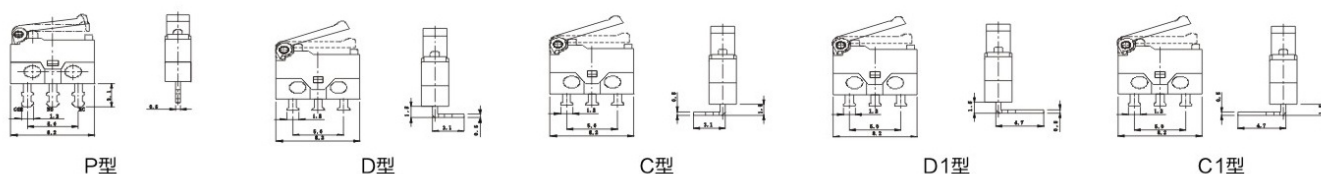

◆ 产品图档 Drawing Products

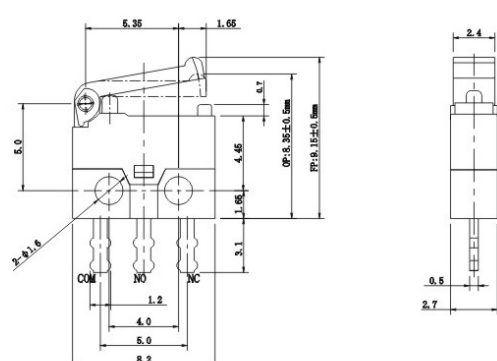成品名MODEL	外形圖 Dimensions
DS037-01P-30-C 	 SCHEMATIC 