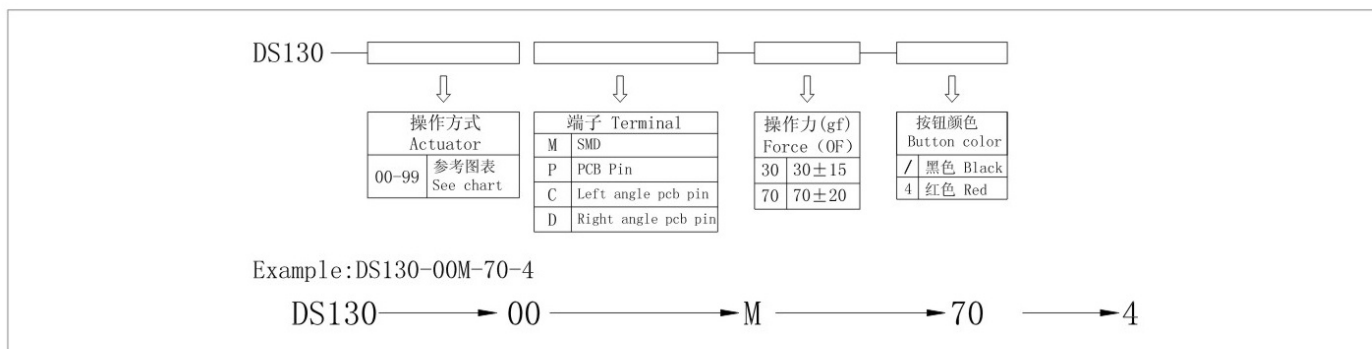


小型微動開關 Miniature Micro Switch

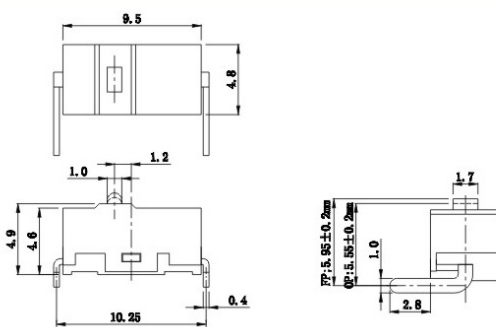

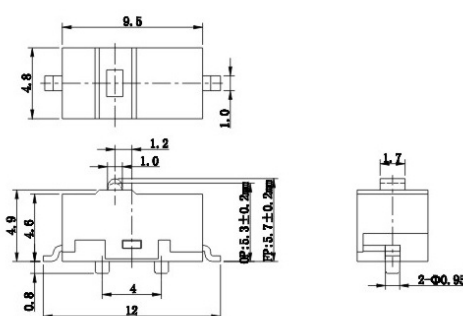

◆ 編號規則 No rules



◆ 規格參數 Specifications

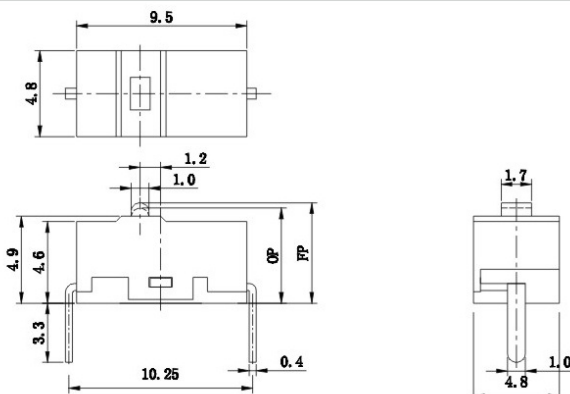


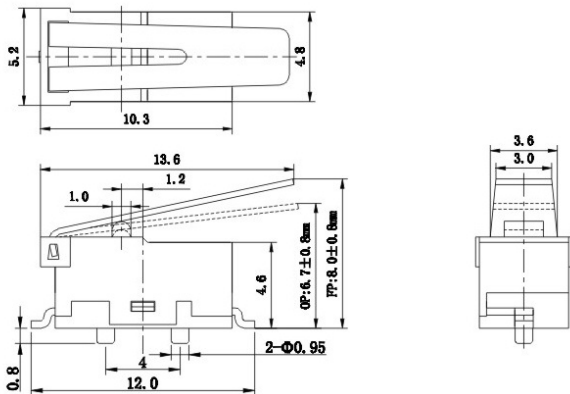

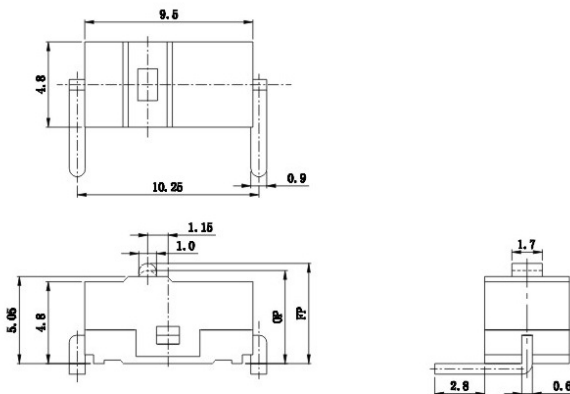


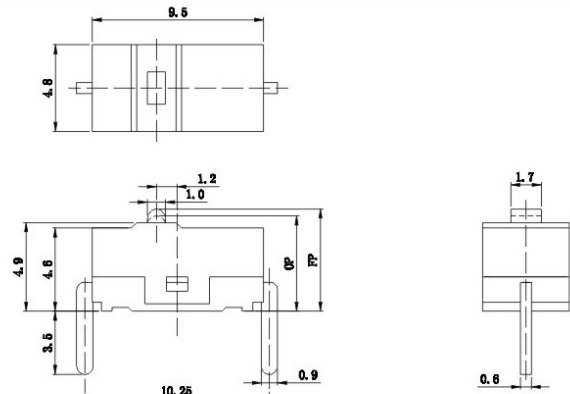

外形尺寸	Dimensions	12.0X5.2
電氣規格	Electrical Specifications	DC48V 0.1A/AC125V 0.1A
接觸電阻(CR)	Contact resistance (CR)	≤300mΩ
機械壽命	Mechanical life	1,000,000
電氣壽命	Electrical life	1,000,000
絕緣電阻(IR)	Insulation Resistance (IR)	≥100MΩ DC250V
耐壓強度(WV)	Compressive strength (WV)	AC250V 1 minute
操作溫度	Operating temperature	-10℃~+60℃
儲存濕度	Storage humidity	<85%RH
操作力值	Operating force value	90+/-20gf; 70+/-20gf; 30+/-15gf; 25+/-10gf.

◆ 產品圖檔 Drawing Products

成品名MODEL	外形圖 Dimensions
DS130-00C-70-4  DS130彈簧系列	 CIRCUIT DIAGRAM  P. C. B LAYOUT 
DS130-00M-70-4  DS130彈簧系列	 CIRCUIT DIAGRAM  P. C. B LAYOUT 

小型微動開關 Miniature Micro Switch

◆ 产品图档 Drawing Products

成品名MODEL	外形圖 Dimensions
DS130-00P-70-4  DS130彈簧系列	 CIRCUIT DIAGRAM  P.C.B LAYOUT 
DS130-01M-30-4  DS130彈簧系列	 CIRCUIT DIAGRAM  P.C.B LAYOUT 
DS030-00C-70  DS030彈片系列	 CIRCUIT DIAGRAM  P.C.B LAYOUT 
DS030-00P-70  DS030彈片系列	 CIRCUIT DIAGRAM  P.C.B LAYOUT 