


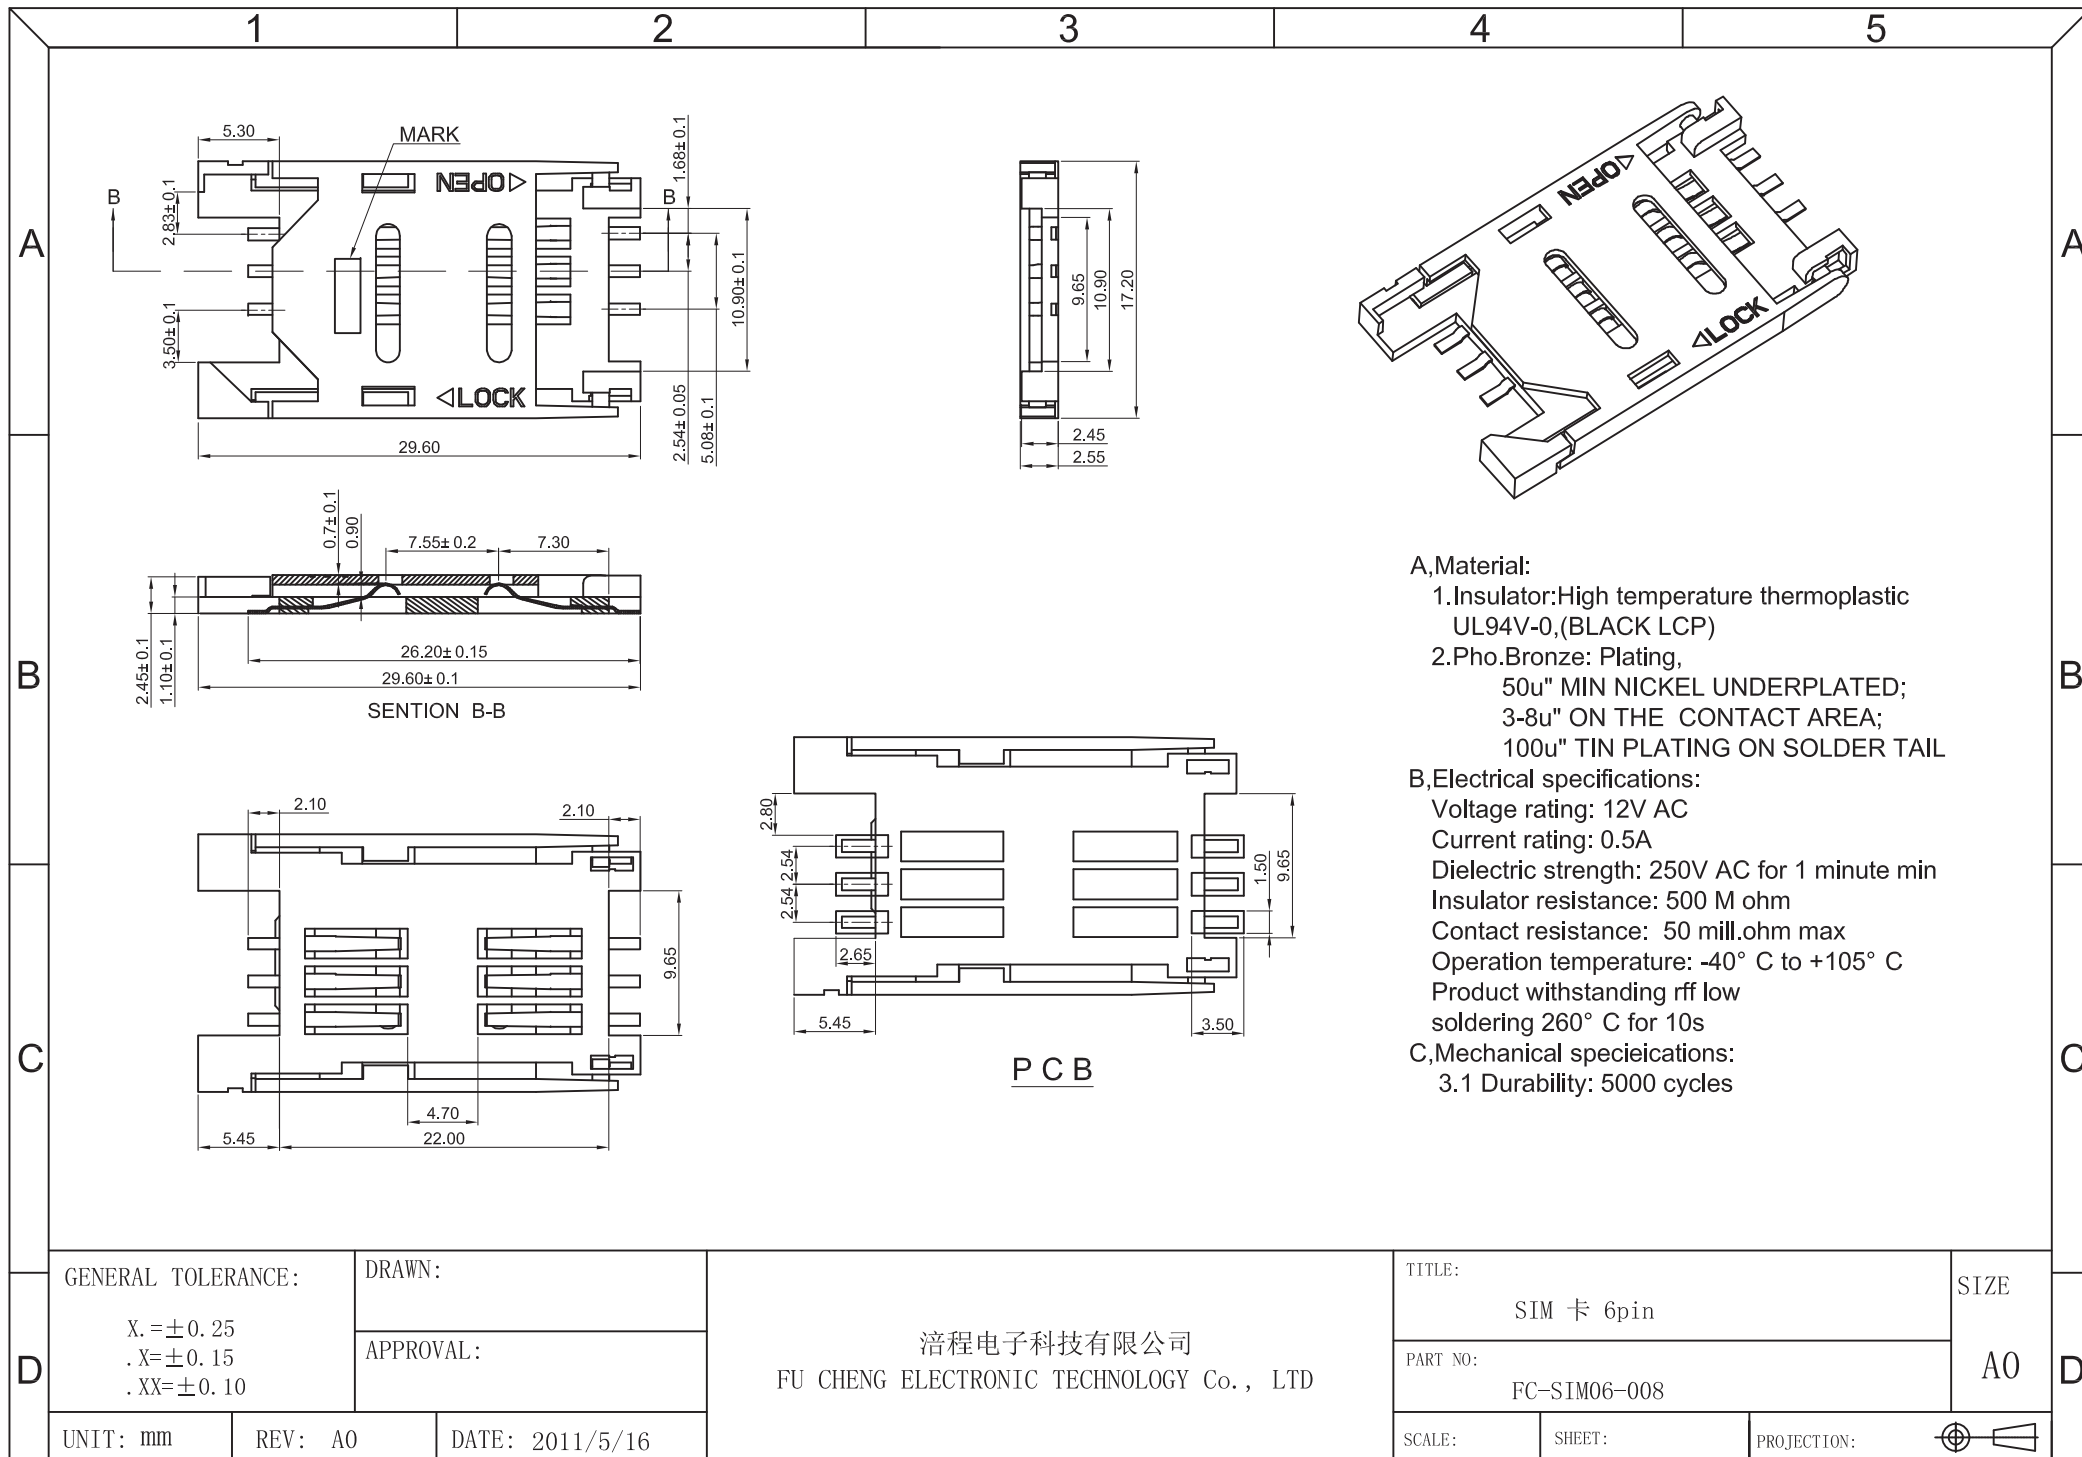

A,Material:

- 1.Insulator:High temperature thermoplastic UL94V-0,(BLACK LCP)
- 2.Pho.Bronze: Plating,
50u" MIN NICKEL UNDERPLATED;
3-8u" ON THE CONTACT AREA;
100u" TIN PLATING ON SOLDER TAIL

B,Electrical specifications:

Voltage rating: 12V AC
Current rating: 0.5A
Dielectric strength: 250V AC for 1 minute min
Insulator resistance: 500 M ohm
Contact resistance: 50 mill.ohm max
Operation temperature: -40° C to +105° C
Product withstanding rff low
soldering 260° C for 10s

C,Mechanical specieications:

- 3.1 Durability: 5000 cycles