


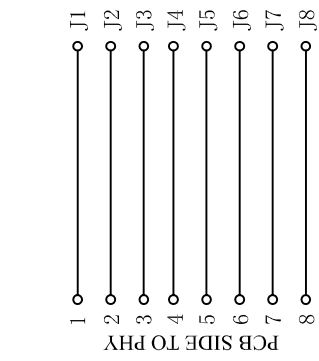
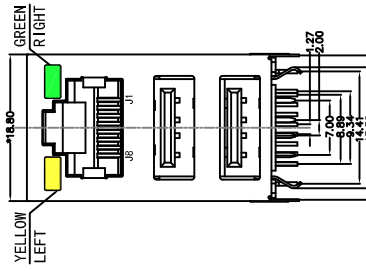
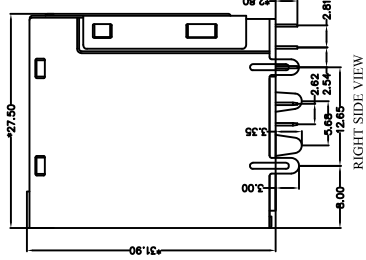
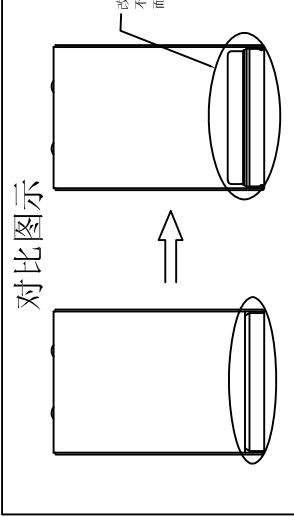


REACH & RoHS
COMPLIANT

REV.	ECN / DESCRIPTION	BY	DATE
A0	NEW	MQ,QU	2018.05.29

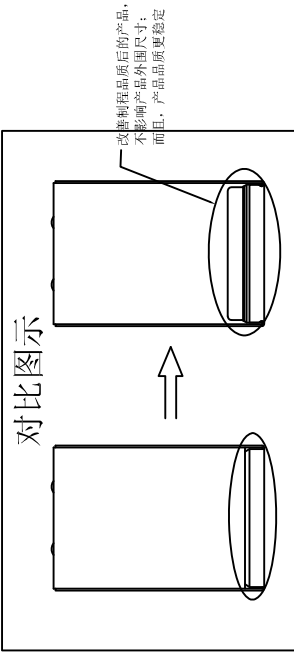


MATERIAL:
RJ45: PBT,UL94V-0,BLACK.
HOUSING: C2680 T=0.30MM, 0.6U" GOLD PLATING.
USB: PBT,UL94V-0,BLACK.
HOUSING: PHOSPHOR BRONZE T=0.25MM, 0.6U" GOLD PLATING.
SHIELD:SPCC.

MACHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40°C~+85°C.
STORAGE TEMPERATURE: -40°C~+85°C.
ALL CRITICAL DIMENSIONS WITH 0.2mm

ELECTRICAL:
VOLTAGE:125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX. INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.

LED Specification

Standard LED Color	LED Wavelength	Forward(A)	Forward(V)
Green	568nm	20mA	1.8-2.8V
Yellow	585nm	20mA	1.8-2.8V

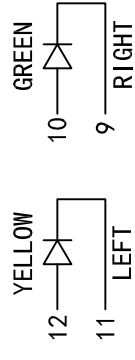

TITLE: RJ45+双USB 2.0	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED	APPROVED BY: JP.Gong
PART NO.: FC-USB2YGW/TNL	SIZE A4	REV A0	CHECKED BY: TW.Xu
REMARK:	SACLE 1:1	SHEET 1/1	DESIGNED BY: MQ.Qu

东莞市浚程电子科技有限公司
DONG GUAN FU CHENG ELECTRONIC TECHNOLOGY Co., LTD

