
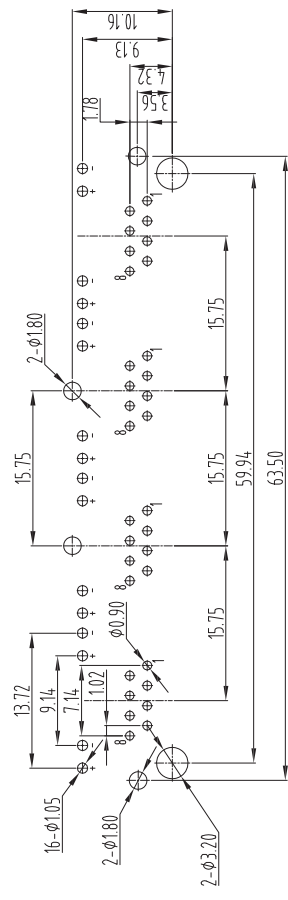
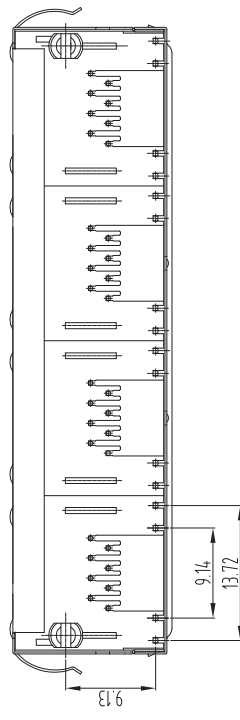



REACH & RoHS
COMPLIANT

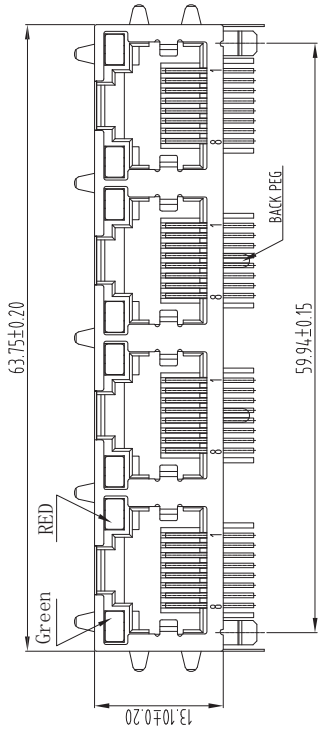

PCB LAYOUT/TOP VIEW

NOTES:

MATERIAL:

- : GLASS FILLED POLYESTER UL94V-0
- : PHOSPHOR BRONZE WITH GOLD PLATING OVER NICKEL.
- : 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.
- : OPTION

ELECTRICAL:

- 1.VOLTAGE RATING :125V AC.
- 2.CURRENT RATING :1.5AMP.
- 3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
- 5.DIELECTRIC WITHSTANDING VOLTAGE :1000V AC RMS 50Hz OR 60Hz :1MIN.

MECHANICAL:

- 1.INSETION FORCE :2.2Kg MAX.
- 2.RETENTION STRENGTH :7.7Kg BETWEEN JACK AND PLUG
- 3.DURABILITY :750 CYCLES MINI.

ENVIRONMENTAL:

- 1.STORAGE : -40℃~+85℃.
- 2.OPERATION : -40℃ TO 85℃.

THE MATRS MODULAR PLUG CONFORMAING TO FCC PART168

REV.	ECN / DESCRIPTION	BY	DATE
A0	NEW	TW.Xu	2018.04.10

东莞市浚程电子科技有限公司
DONG GUAN FU CHENG ELECTRONIC TECHNOLOGY Co., LTD

TITLE: RJ45 5JA SERIES 1*4 LED JACK		UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED	APPROVED BY: JP.Gong
PART NO.: FCRJ45-5JA88-4211 左绿右红	SIZE A4	REV A0	x±0.35 .x±0.30	CHECKED BY: TW.Xu
REMARK:	SACLE 1:1		.xx±1.5° .xxx±1.0°	DESIGN BY: MQ.Qu
	SHEET 1/1			