
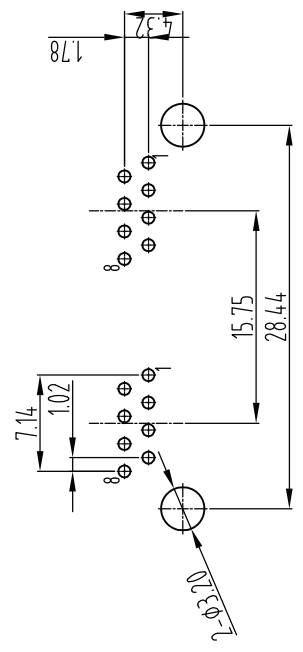
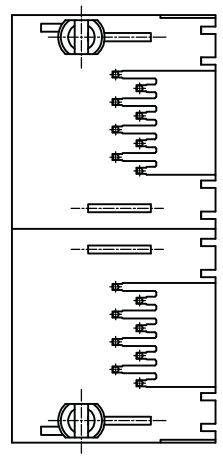


REVISION RECORD		
REV	ECD	DESCRIPTION

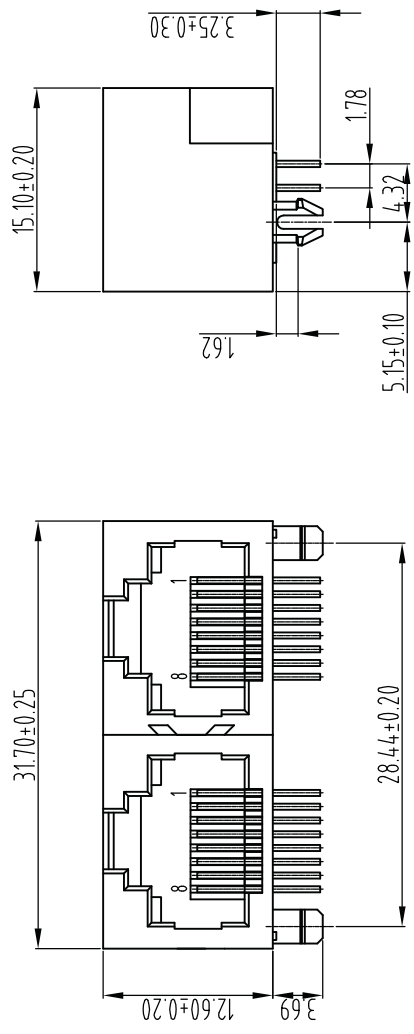

PCB LAYOUT/TOP VIEW

- NOTES:**
- MATERIAL:**
- 1.HOUSING :GLASS FILLED POLYESTER UL94V-0
 - 2.CONTACT (ROUND PIN Ø0.46mm) :PHOSPHOR BRONZE WITH GOLD PLATING OVER NICKEL.
- ELECTRICAL:**
- 1.VOLTAGE RATING :125V AC.
 - 2.CURRENT RATING :1.5AMP.
 - 3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
 - 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
 - 5.DIELECTRIC WITHSTANDING VOLTAGE :1000V AC RMS 50Hz OR 60Hz. 1MIN.
- MECHANICAL:**
- 1.INSETION FORCE :2.2Kg MAX.
 - 2.RETENTION STRENGTH :7.7Kg BETWEEN JACK AND PLUG
 - 3.DURABILITY :750 CYCLES MINI.
- ENVIRONMENTAL:**
- 1.STORAGE : -40°~+85°.
 - 2.OPERATION : -40° TO 85°.
- THE MANTS MODULAR PLUG CONFORMING TO FCC PART68
- PART NUMBER:

DFTD JIANX		DATE	2011-06-02
CHKD	DATE		
MFD	DATE		
APPLY	DATE		
MATERIAL :			
QTY :			
FINISH :			
SCALE :			

TOLERANCES EXCEPT AS NOTED	
MM	±
.0	± 0.20
.00	± 0.15
.000	± 0.10
ANGLES ± 0.5°	
THIRD ANGLE PROJECTION	

DRAWING NO. FOR J45-5JA88-20000		REV	A/1
/PART NO.		SIZE	A4
DO NOT SCALE DRAWING		SHEET X	DF Y

东莞市涪程电子科技有限公司

TITLE

5JA SERIES 1XN LED JACK