
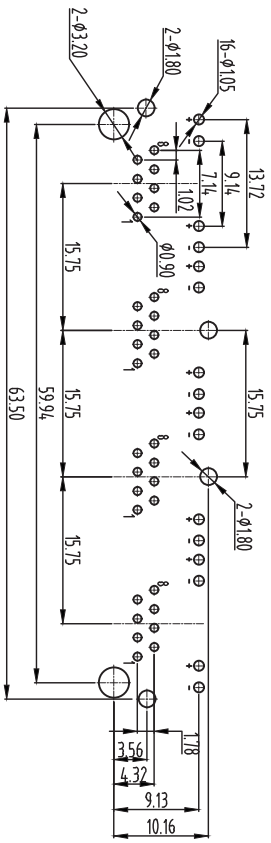
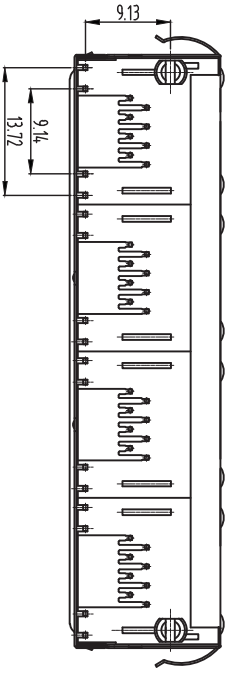


REVISION RECORD			
REV	ECO	DESCRIPTION	DRFT

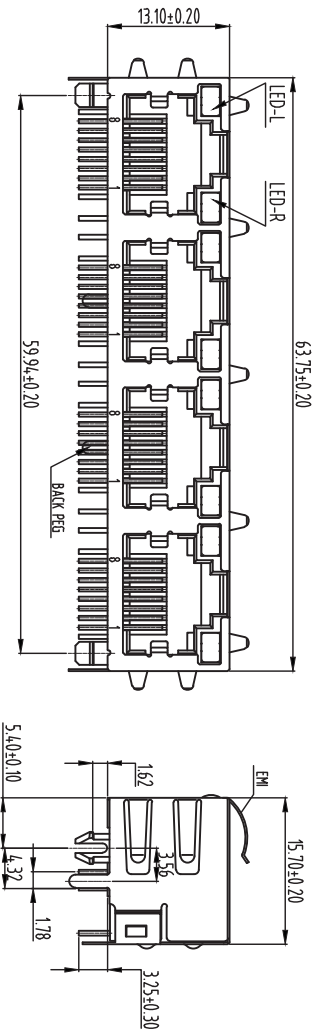

PCB LAYOUT/TOP VIEW

NOTES:

MATERIAL:

- 1 HOUSING
- 2 CONTACT (ROUND PIN Ø0.45mm)
- 3 SHIELD
- 4 LED

ELECTRICAL:

- 1 VOLTAGE RATING :125V AC.
- 2 CURRENT RATING :15AMP
- 3 CONTACT RESISTANCE :30 MILLIOHMS MAX.
- 4 INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
- 5 DIELECTRIC WITHSTANDING VOLTAGE :1000V AC RMS 50Hz OR 60Hz. MIN.

MECHANICAL:

- 1 INSERTION FORCE :22Kg MAX.
- 2 RETENTION STRENGTH :7.7kg BETWEEN JACK AND PLUG
- 3 DURABILITY :750 CYCLES MIN.

ENVIRONMENTAL:

- 1 STORAGE : -40°~+85°.
- 2 OPERATION : -40° TO 85°.

THE MART'S MODULAR PLUG CONFORMING TO FCC PART 68
PART NUMBER:

DETACHED LISTS		DATE: 2011-06-02	
MM	MIN	DRTO	JIANX
MM	MIN	CHKD	DATE
MM	MIN	APPRVL	DATE
MM	MIN	MATERIAL	DATE
MM	MIN	QTY	DATE
MM	MIN	FINISH	DATE
MM	MIN	SCALE	DATE

东莞市浔程电子科技有限公司
TITLE
5JA SERIES 1XN LED JACK

DRAWING NO.	FORUJ45-5JA884211XX	SIZE	REV
PART NO.		A4	A/1
DO NOT SCALE DRAWING		SHEET X	OF Y

8 7 6 5 4 3 2 1