


REV.	ZONE	DESCRIPTION	DESIGN	DATE
B		NEW	James	08/16-10

Connector terminal NO.	Pin NO.
Pin 1	VCC:PW R signal
Pin 2	RST:Reset signal
Pin 3	CLK:Clocking signal
Pin 5	GND
Pin 6	VPP:Programming Voltage
Pin 7	I/O:Serial data input/output




NOTE

1. ELECTRICAL:
CURRENT RATING: 0.5A
INSULATOR RESISTANCE: 1000MΩ MIN.
WITHSTANDING VOLTAGE: 500 VAC / MINUTE
CONTACT RESISTANCE:100mΩ MIN.
OPERATING TEMPERATURE:-40°C~+60°C
3. RoHS 2002/95/EC COMPLIANT.
4. PACKAGE:750pcs/REEL&TAPE.

PART	PART NAME	Material	QTY
F	SIM P/P SPRING	SWP	1PCS
E	SIM P/P LINK	SUS304	1PCS
D	SIM P/P SHELL	SUS304	1PCS
C	SIM P/P SIM_TERMINAL	C5210	1SET
B	SIM P/P SLIDER	PA9T	1PCS
A	SIM P/P HOUSING	LCP	1PCS

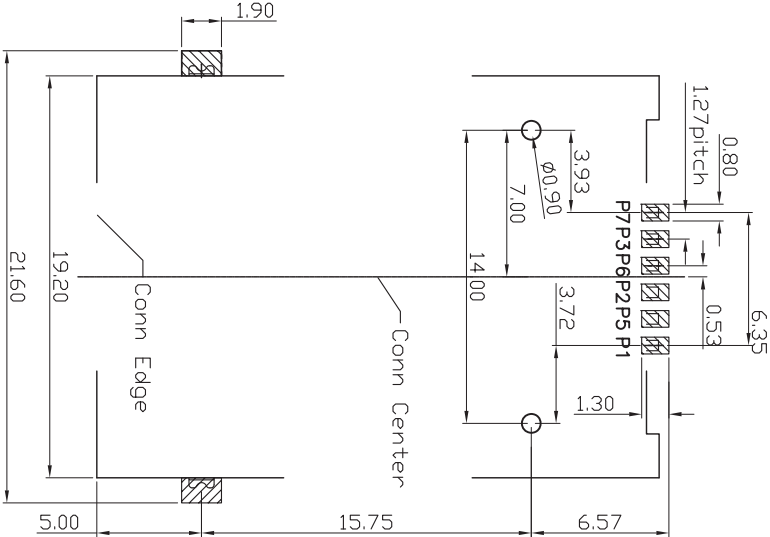

RECOMMENDED PCB LAYOUT

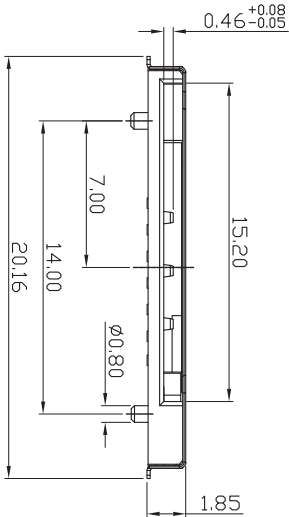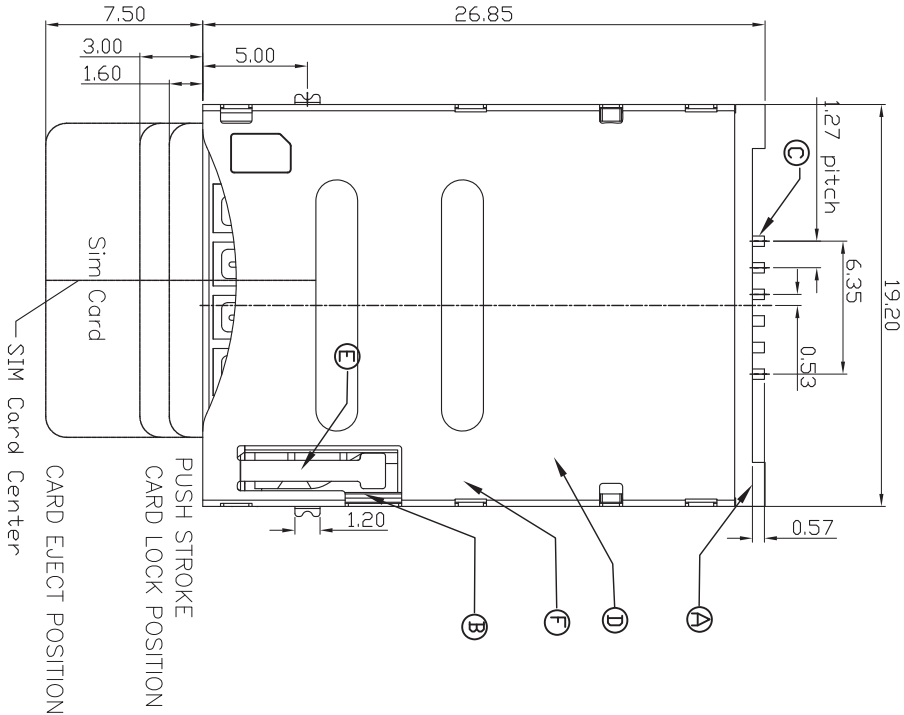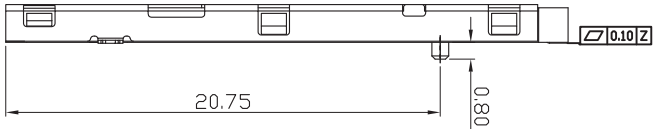

Unless otherwise specified
tolerances are

X.	±0.25
X.X	±0.20
X.XX	±0.15
X.XXX	±0.10
X°	±2.0°
X.X°	±1.0°

东莞市涪程电子科技有限公司

DRAW NO.	DATE	DRAW NAME:
FD100816-007	08/16-10	SIM CARD 6P PUSH TYPE

FINISH	MATERIAL	UNIT	SCALE	REV	SHEET
SEE NOTES		mm	1:1	B	1 OF 1



Third Angle Project