


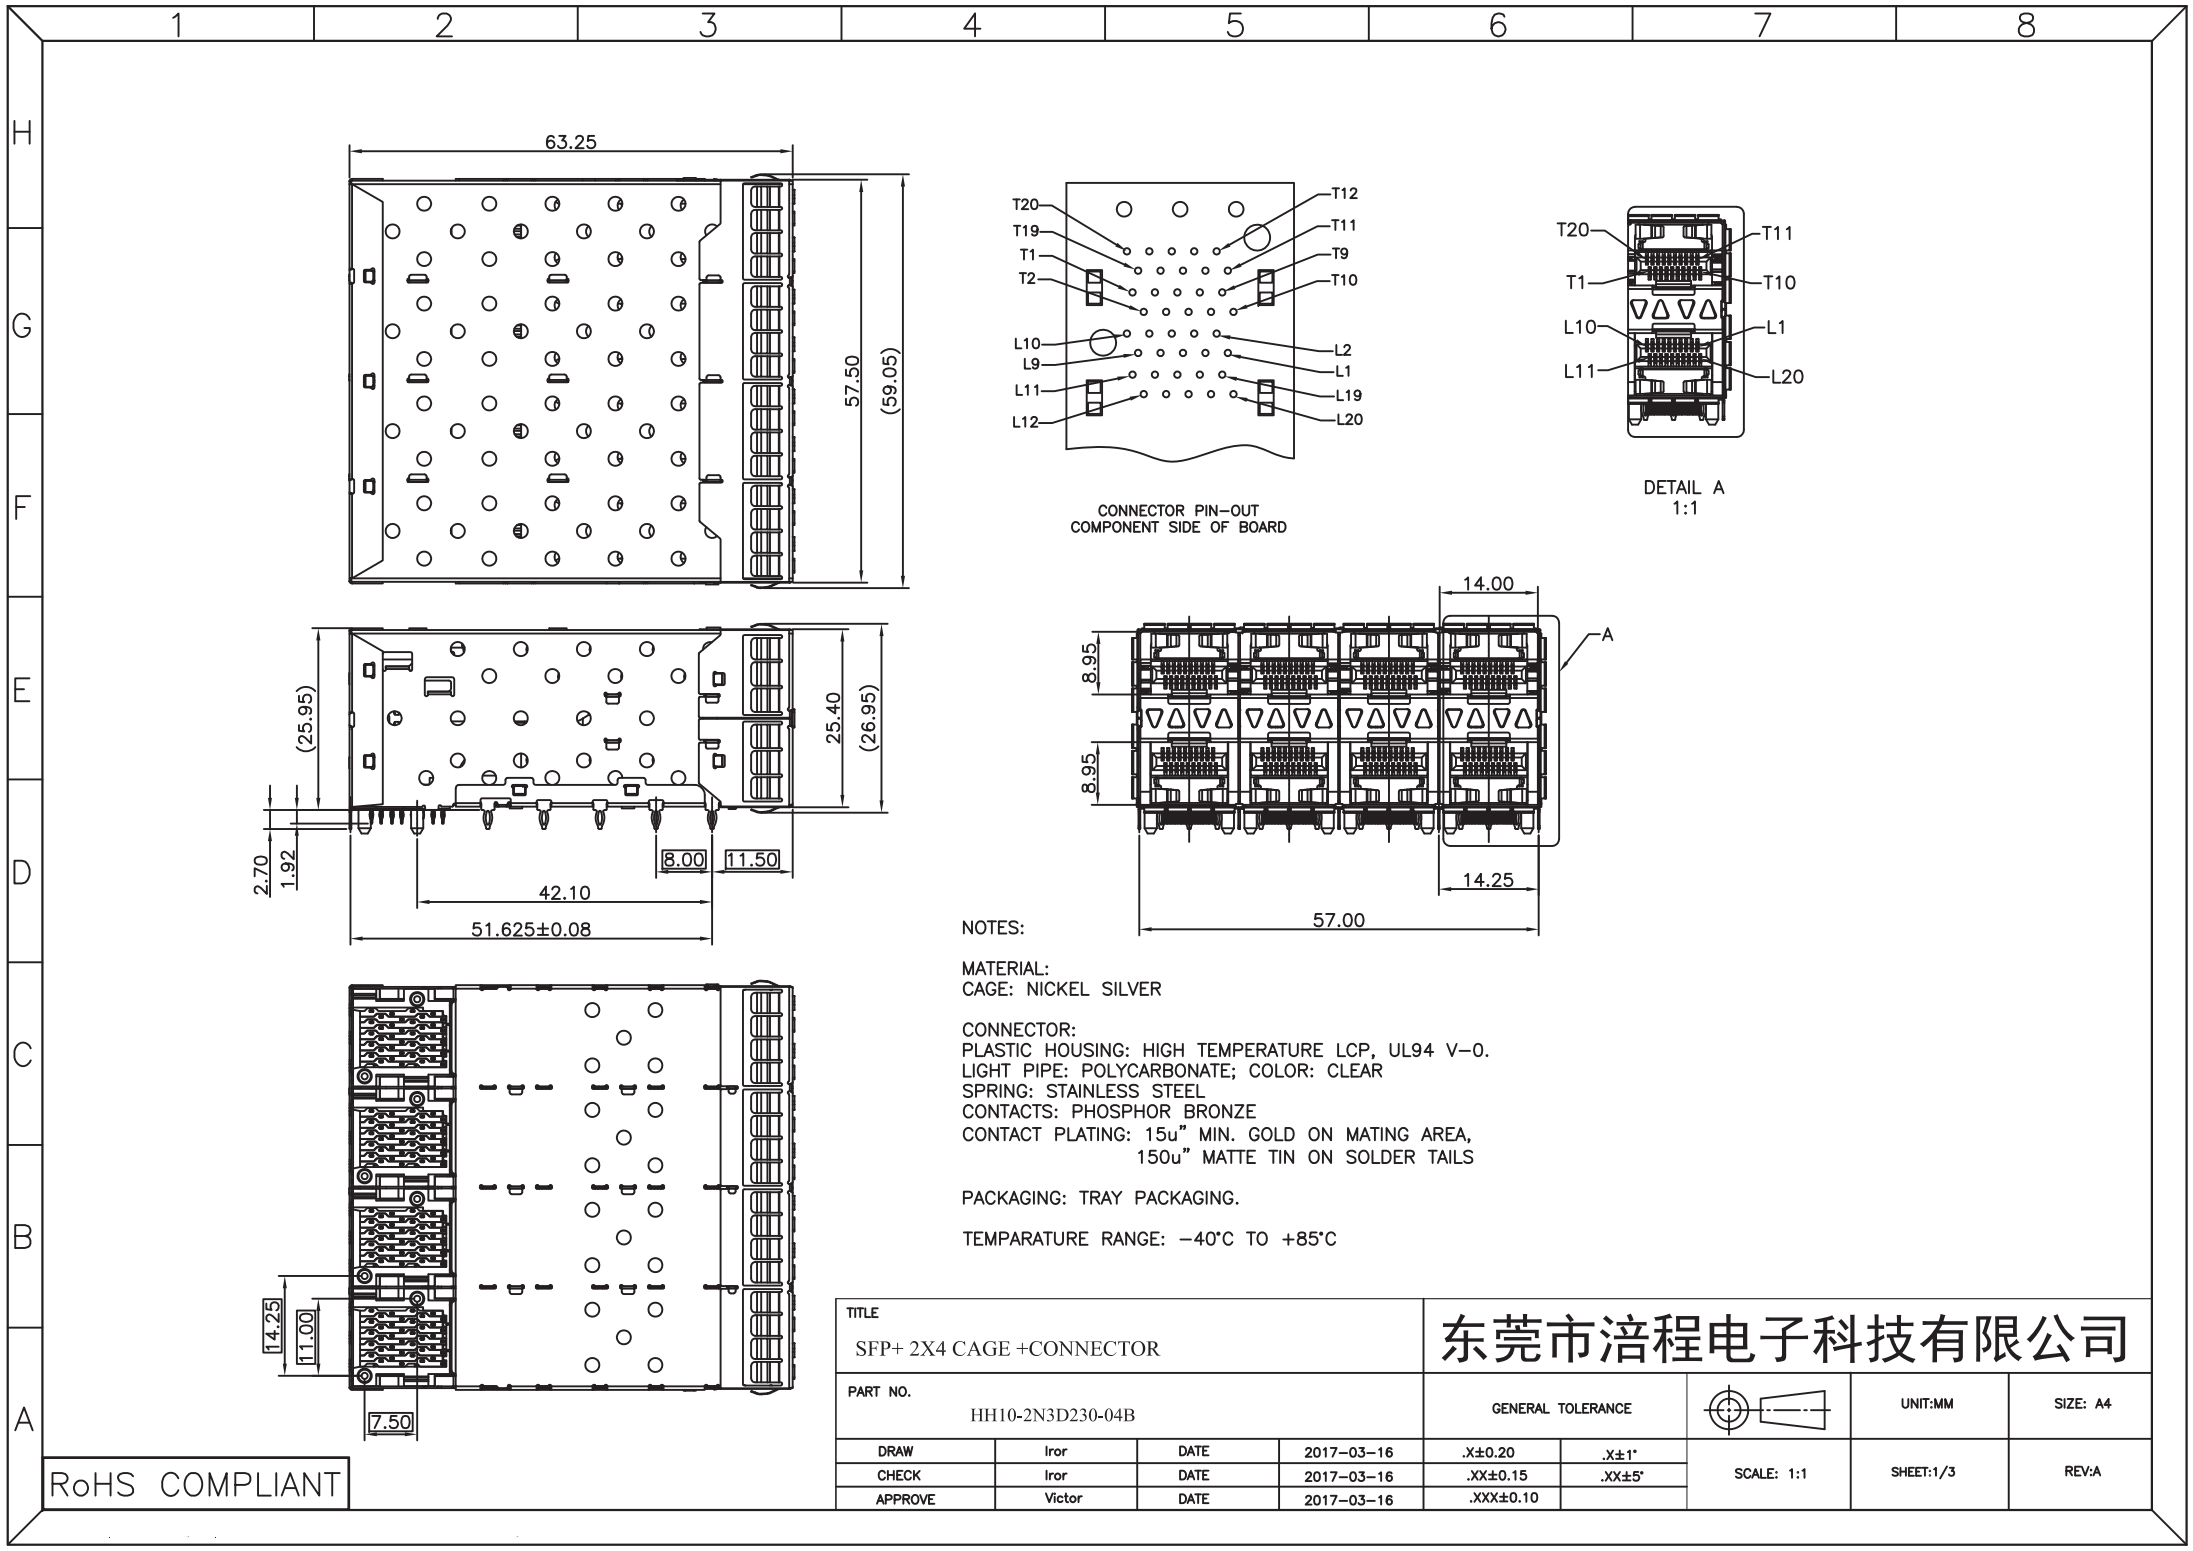

CONNECTOR PIN-OUT
COMPONENT SIDE OF BOARD

DETAIL A
1:1

NOTES:

MATERIAL:
CAGE: NICKEL SILVER


CONNECTOR:
PLASTIC HOUSING: HIGH TEMPERATURE LCP, UL94 V-0.
LIGHT PIPE: POLYCARBONATE; COLOR: CLEAR
SPRING: STAINLESS STEEL
CONTACTS: PHOSPHOR BRONZE
CONTACT PLATING: 15u" MIN. GOLD ON MATING AREA,
150u" MATTE TIN ON SOLDER TAILS

PACKAGING: TRAY PACKAGING.

TEMPERATURE RANGE: -40°C TO +85°C

TITLE				东莞市涪程电子科技有限公司						
SFP+ 2X4 CAGE +CONNECTOR										
PART NO.				GENERAL TOLERANCE				UNIT:MM	SIZE: A4	
HH10-2N3D230-04B										
DRAW	Iror	DATE	2017-03-16	.X±0.20	.X±1°	SCALE: 1:1		SHEET:1/3	REV:A	
CHECK	Iror	DATE	2017-03-16	.XX±0.15	.XX±5°					
APPROVE	Victor	DATE	2017-03-16	.XXX±0.10						

RoHS COMPLIANT

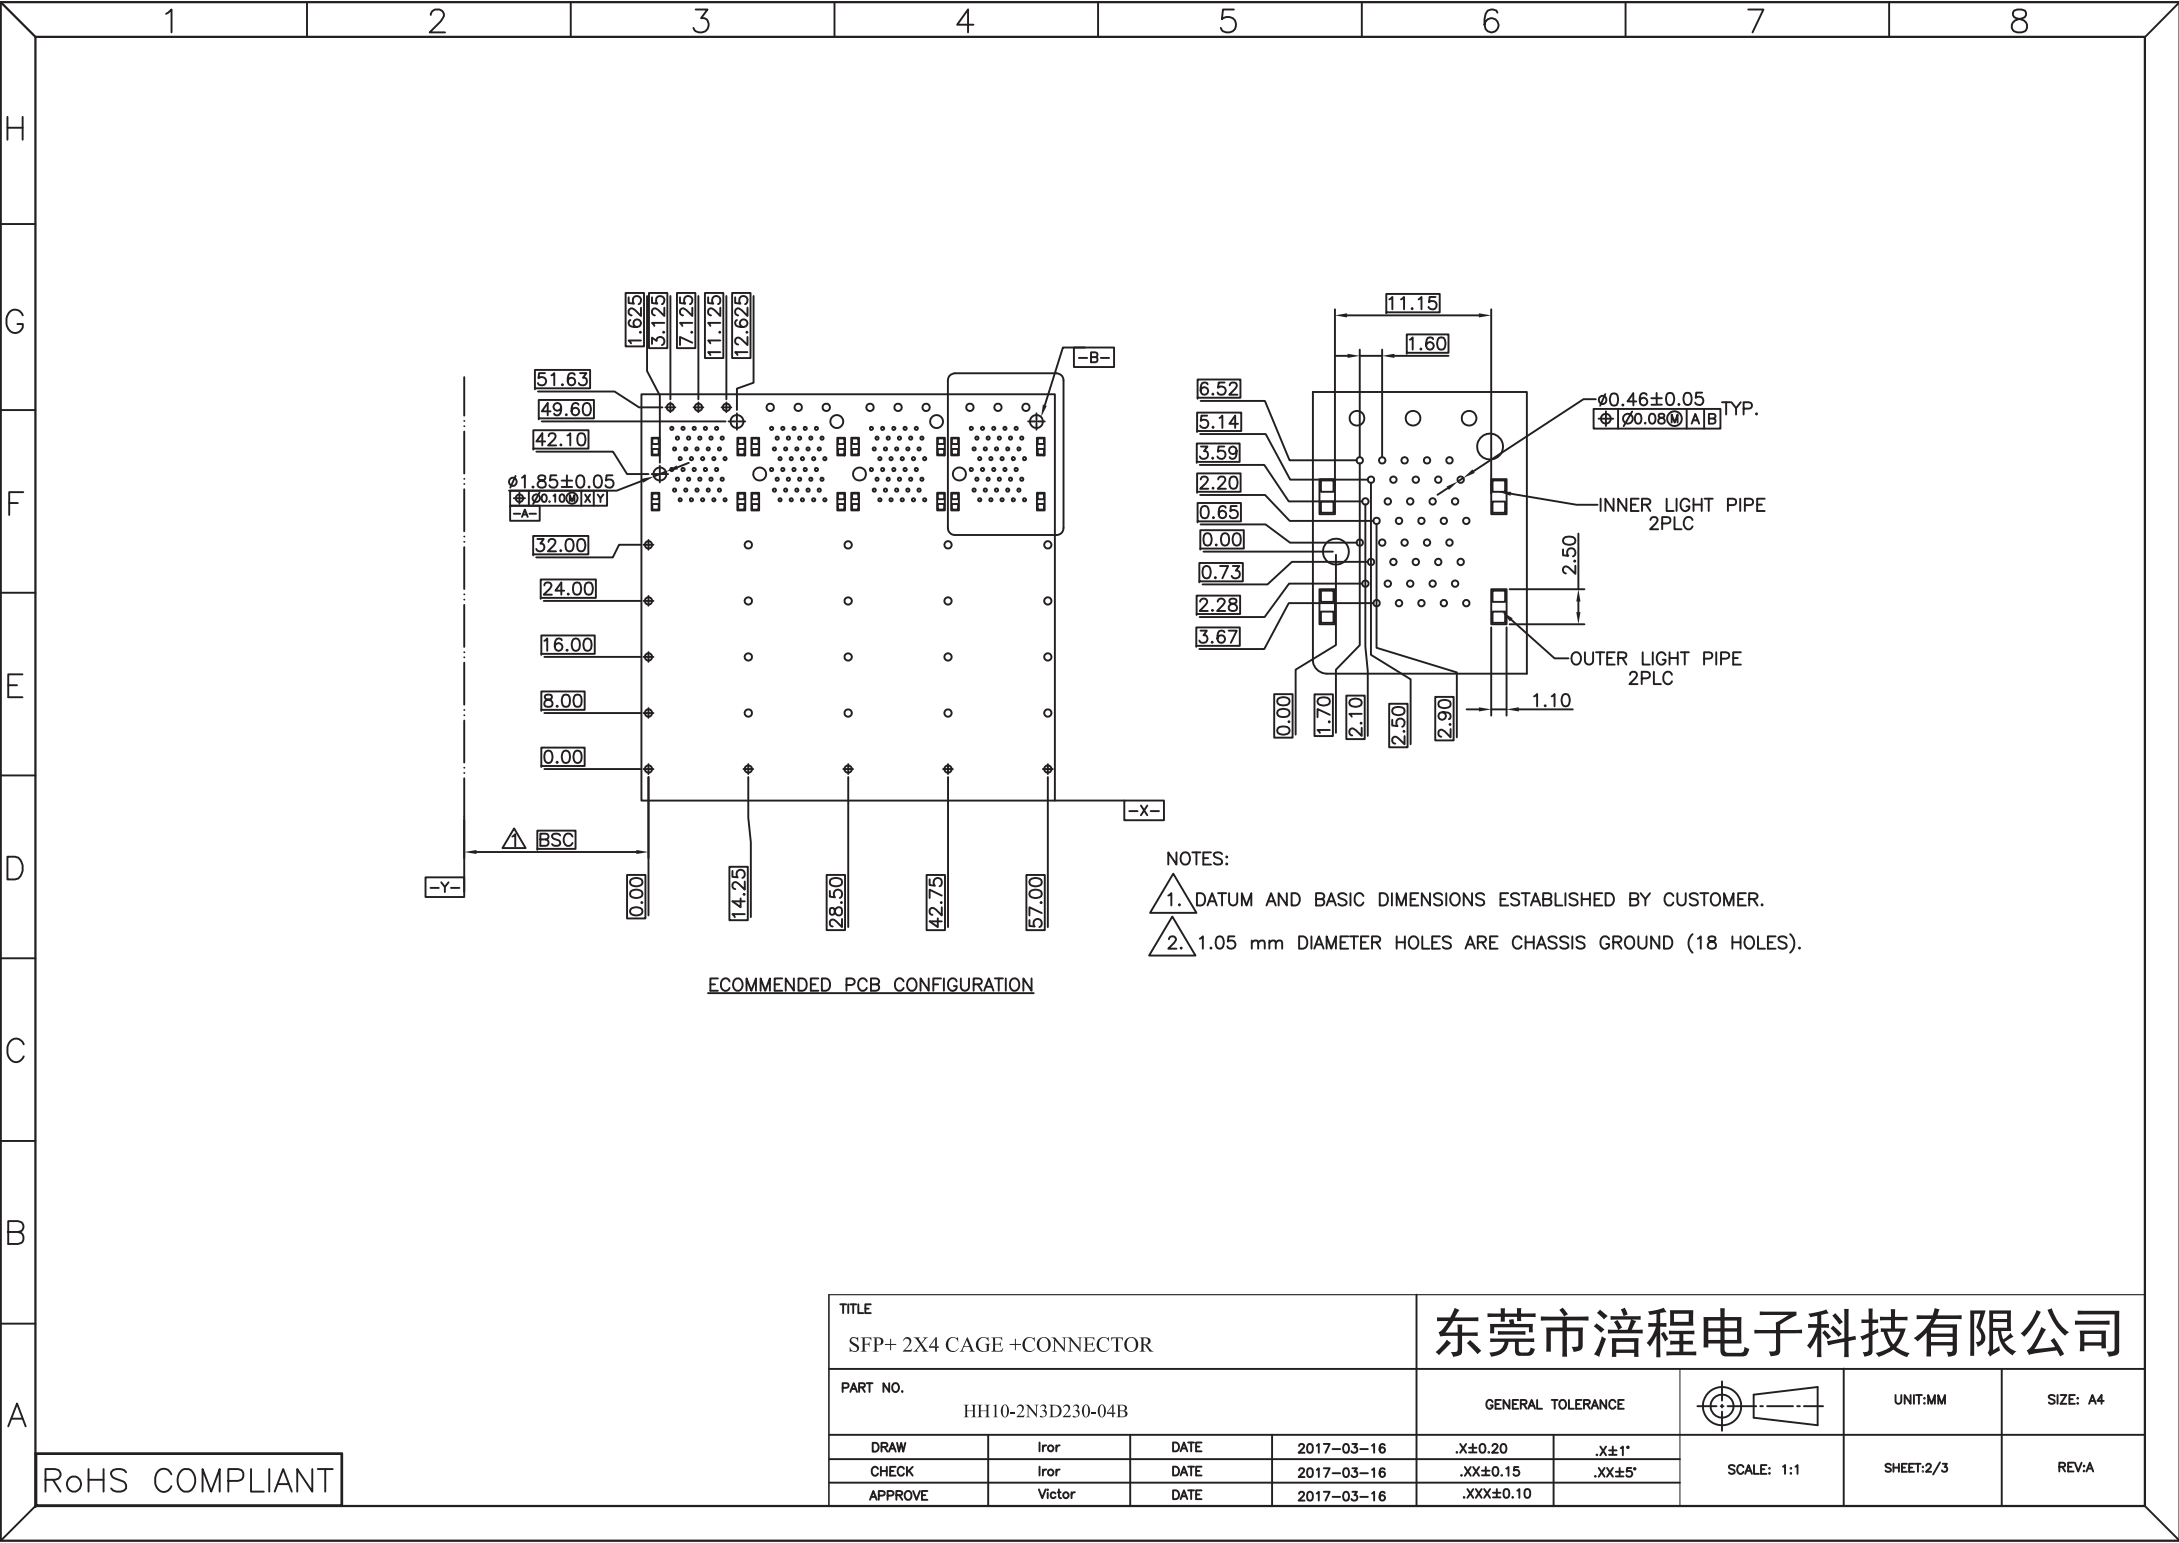


RECOMMENDED PCB CONFIGURATION

- NOTES:
1. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
 2. 1.05 mm DIAMETER HOLES ARE CHASSIS GROUND (18 HOLES).

TITLE				东莞市涪程电子科技有限公司					
SFP+ 2X4 CAGE +CONNECTOR									
PART NO.				GENERAL TOLERANCE			UNIT:MM	SIZE: A4	
HH10-2N3D230-04B									
DRAW	Iror	DATE	2017-03-16	.X±0.20	.X±1°	SCALE: 1:1		SHEET:2/3	REV:A
CHECK	Iror	DATE	2017-03-16	.XX±0.15	.XX±5°				
APPROVE	Victor	DATE	2017-03-16	.XXX±0.10					

RoHS COMPLIANT

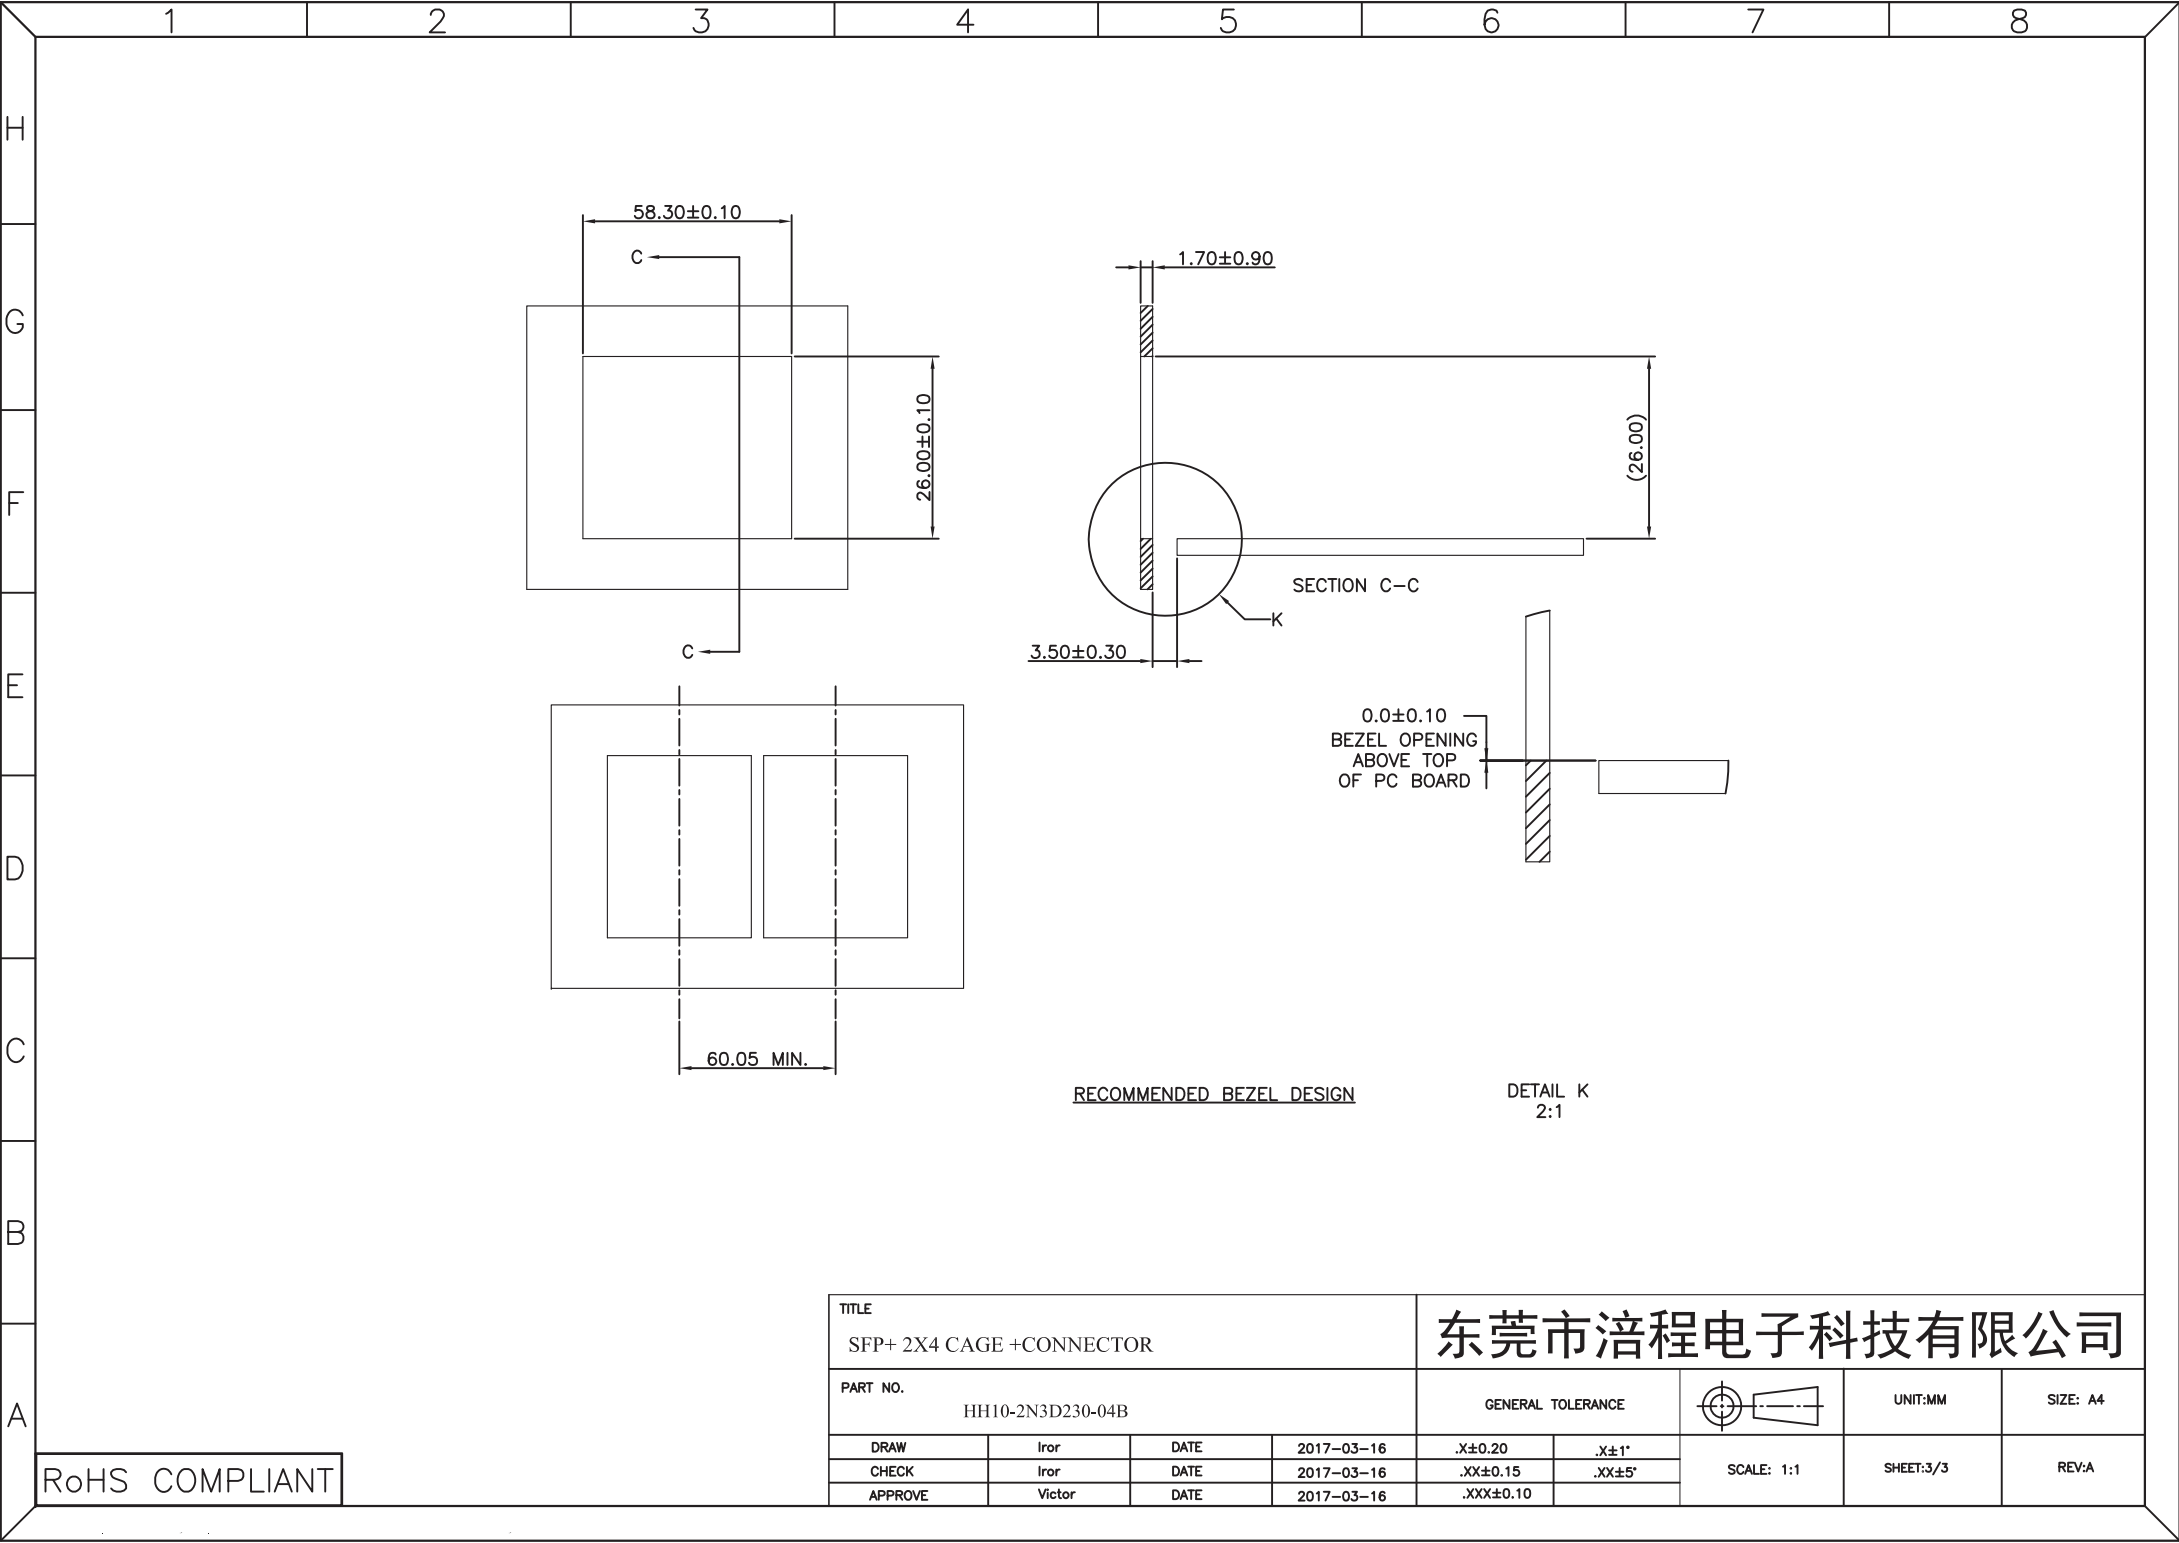

TITLE						东莞市涪程电子科技有限公司			
SFP+ 2X4 CAGE +CONNECTOR									
PART NO.						GENERAL TOLERANCE		UNIT:MM	SIZE: A4
HH10-2N3D230-04B									
DRAW	Iror	DATE	2017-03-16	.X±0.20	.X±1°	SCALE: 1:1		SHEET:3/3	REV:A
CHECK	Iror	DATE	2017-03-16	.XX±0.15	.XX±5°				
APPROVE	Victor	DATE	2017-03-16	.XXX±0.10					