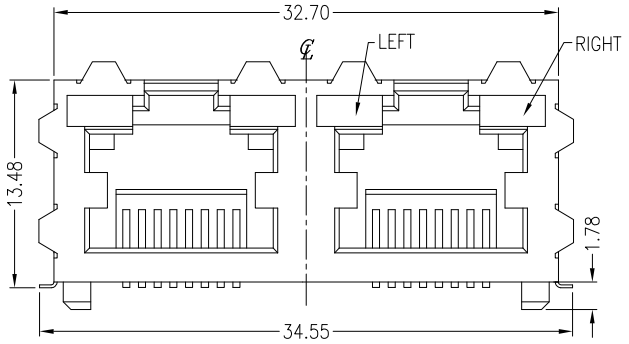

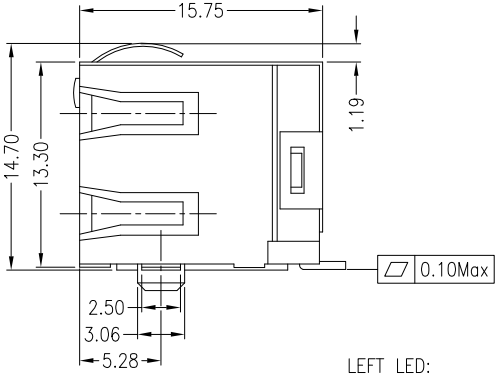

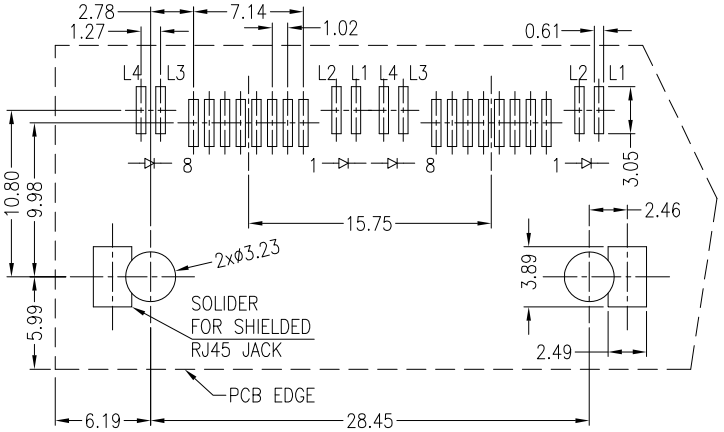

RECOMMENED PCB LAYOUT
COMPONENT SIDE
TOLERANCE ±0.05

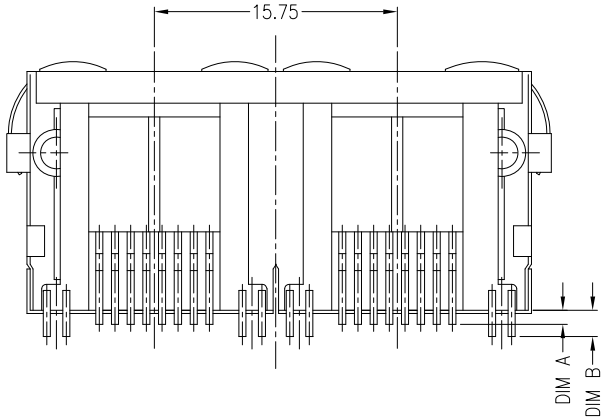

LEFT LED:

GREEN

L4 + – L3

RIGHT LED:

YELLOW

L2 + – L1

PART NUMBER:

JS2-C B 2 1-5 1 0 H

- SHELL CODE — B:W/ ALL SPRING, W/O LOGO
- 2-housing NY6T — 2
- LED CODE — LEFT LED: YELLOW; RIGHT LED: GREEN
- DIM CODE — 1
- PLATING CODE — 5-GOLD PLATED 15u"
- H: LED高溫燈

CODE	Contact PIN DIM A	LED PIN DIM B
1	0.90	1.70

NOTES:
1.MATERIAL:
HOUSING:HIGH TEMP.THERMOPLASTIC,BLACK,NY6T(PA6T)UL 94V-0
CONTACT:PHOSPHOR BRONZE,T=0.35mm
SHELL:BRASS,T=0.20mm
2.FINISH:
CONTACT:50u"MIN NICKEL UNDERPLATING ALL AREA,
100u"MIN. TIN ON SOLDERTAILS,
GOLD PLATING ON CONTACT AREA.
SHELL:30u"MIN. NICKEL UNDERPLATING ALL AREA
3.OPERATING TEMPERTURE:-40°C~+85°C.
4.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

REV.	ECN. NO.	DRAWN	DATE	EC.content
A	NEW	XingJian	11/12/2015	

FUCHENG

⊗: QUALITY CONTROL ITEM		GENERAL TOLERANCE .X± 0.38 X.°± 2° .XX± 0.25 .X°± 1° .XXX± 0.13	PART NO.: JS2-CB21-510H
APPROVED			TITLE: RJ45 CONNECTOR JS 1X2PORT W/LED,8P,8C,SHIELDED,SMT TYPE
CHECKED			
DRAWN		UNIT: mm	SCALE: 1:1 / SHEET: 1/1 / REV.: A

SIZE: A4

說明: △:備註 ◇:版本變更 Ⓝ:尺寸序號 ■:重點尺寸 ▼:CPK尺寸

DOCUMENT NO. : ZER0013/A.3