

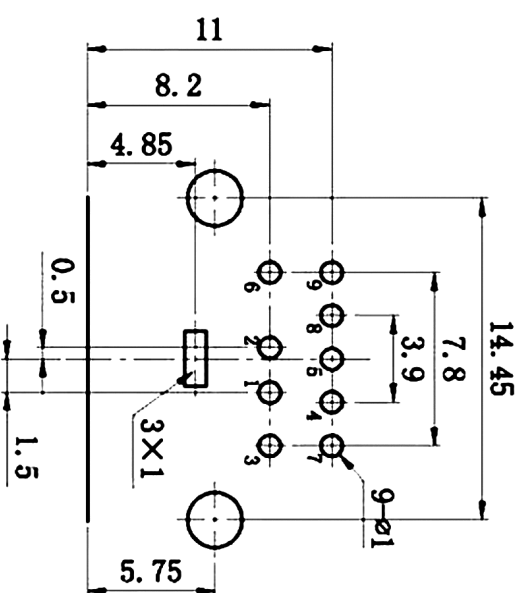
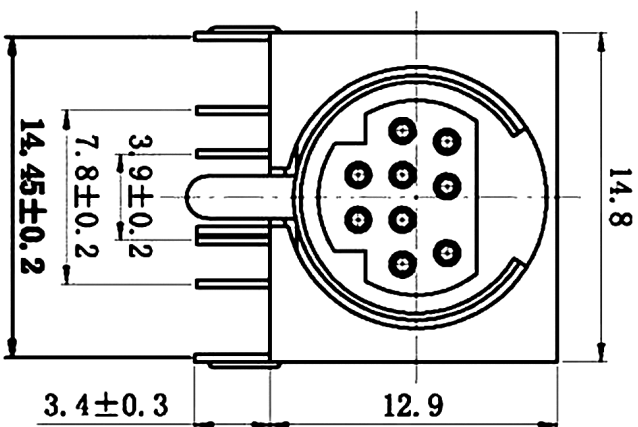


REVISIONS		DATE	DESIGN	CHECKED	APPROVED
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	
A	ECN-11-0330		INITIAL RELEASE	10/26/2006	T.W

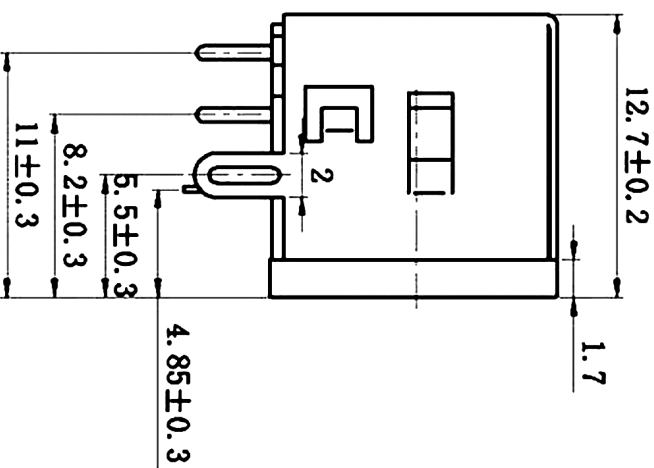

P.C.B HOLE LAYOUT

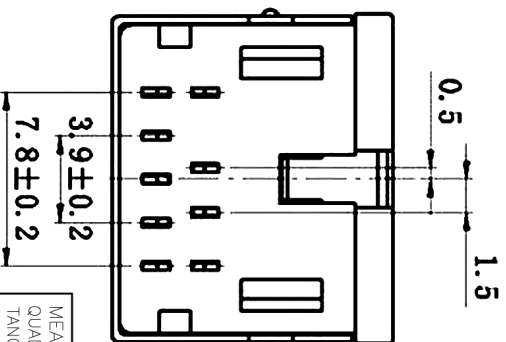

- 主要技术特性要求:**
1. 使用温度范围:
环境温度: -25~+70℃
相对湿度: 95%(40℃)
 2. 额定负荷: 2A 12V DC
 3. 接触电阻: ≤30mΩ
 4. 绝缘电阻: ≥100MΩ
 5. 耐压: 250V AC (50Hz) 1min
 6. 插拔力: 5~35N
 7. 寿命: ≥5000次

MEASURE POINT: ()		(GP)	(IP)
QUADRANT POINT		(GP)	(IP)
TANGENCY POINT		(GP)	(IP)
INTERSECTION POINT		(GP)	(IP)
UNLESS OTHERWISE SPECIFIED, TOLERANCE:		±0.20	±0.15
X.x		±0.15	±0.05
X.xxx		±0.05	±0.02
ANGULAR		±2°	
DESIGN		T.W	DATE 10/27 2007
CHECKED		T.W	DATE 10/27 2007
APPROVED			DATE
PART NO.		MJ-905-090-010	REV.: A
DRAWING NO.		E:\PROV\DN\S\9	SCALE: NO
		SIZE: A4	SHEET: 1/1
			UNIT: mm

FUCHENG ELECTRONICS TECH CO.,LTD

Mini DIN Connector 90° DIP TYPE