

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
AO			图面发行	2012.08.28	Xingyue

NOTE:

1. MATERIAL

HOUSING(MOLDING): LCP UL94 V-0 WHITE

CONTACT PIN:BRASS(C2680-H) T=0.15±0.01mm



SHELL:Phosphor bronze(C5191-H) T=0.15±0.01mm

2. PLATING



CONTACT/SHELL:

GOLD PLATED FOR ALL 3u", 50U" MIN NICKLE

UNDERPLATED OVER ALL

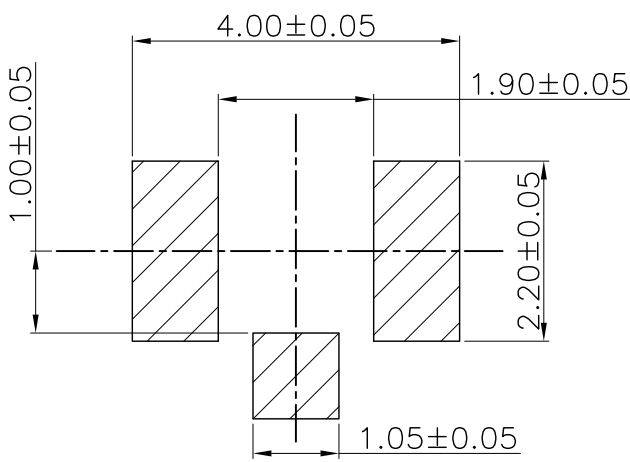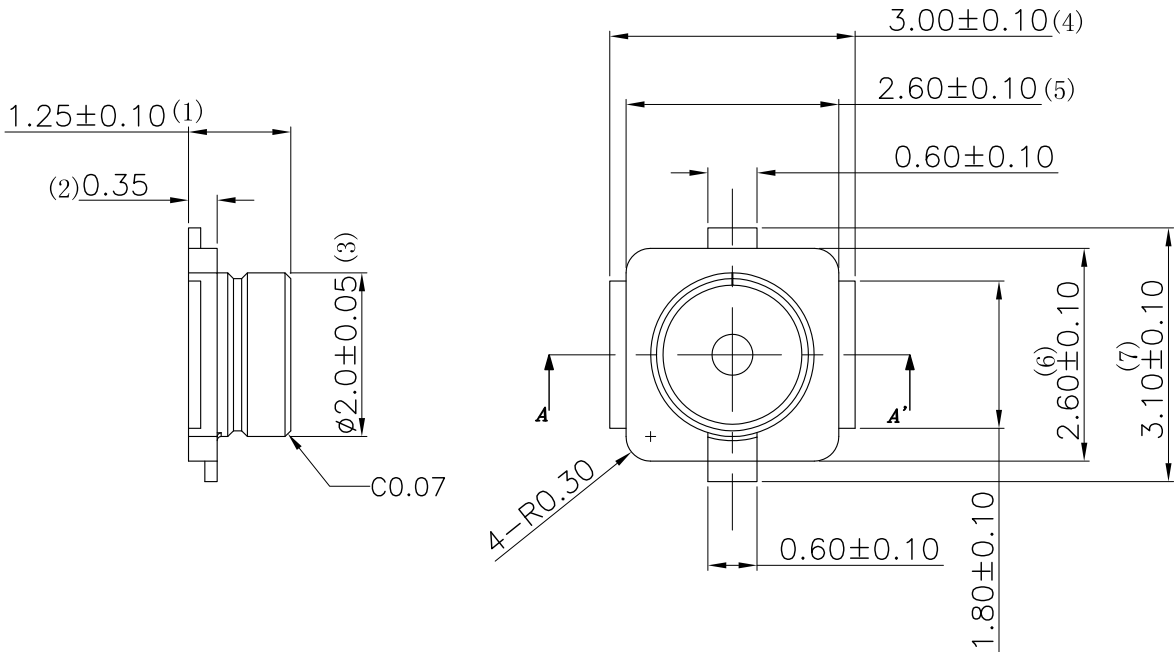

PCB LAYOUT

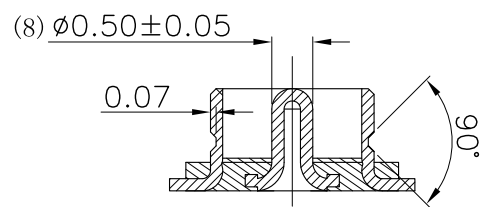

SECTION A-A'

COPLIANCE WITH THE REQUIEMENT ☒ RoHS ☐ HF ☐ SONY00259 ☐ OTHER
* NO USING RESTRICTED AND BANNED SUBSTANCE

DIM	TOL	DIM	TOL
X.	±0.20	X'.	±4.0°
X.X	±0.15	X.X°	±3.0°
X.XX	±0.10	X.XX°	±2.0°
X.XXX	±0.05	X.XXX°	±1.0°

东莞市涪程电子科技有限公司					
DRAW NO.		DATE	DRAW NAME: I-PEX板端插座		
DESIGN:	Xingyue	2012.08.28	P/N NO. P1163-0340R		
CHECK:			MODEL:		
APPROVED:			REV. AO	SCALE N/A	UNIT: mm
					SHEET: N/A