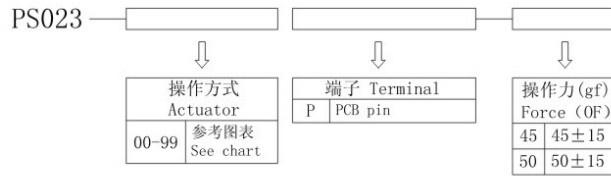


小型微動開關 Miniature Micro Switch

◆ 編號規則 No rules







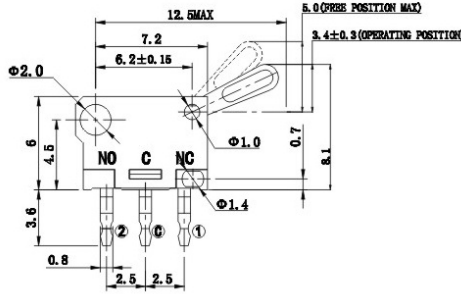


Example: PS023-01P-50

PS023 ———→ 01 ———→ P ———→ 50

◆ 規格參數 Specifications

外形尺寸	Dimensions	8.5X5.6
電氣規格	Electrical Specifications	0.1A/DC30V
接觸電阻(CR)	Contact resistance (CR)	≤100mΩ
機械壽命	Mechanical life	50,000
電氣壽命	Electrical life	10,000
絕緣電阻(IR)	Insulation Resistance (IR)	≥100MΩ DC250V
耐壓強度(WV)	Compressive strength (WV)	AC250V 1 minute
操作溫度	Operating temperature	-10℃~+70℃
儲存濕度	Storage humidity	<85%RH
操作力值	Operating force value	45+/-15gf

◆ 產品圖檔 Drawing Products

成品名MODEL	外形圖 Dimensions
PS023-01P-50  PS023系列	   Switching Timing Non-shorting Model (2) NC FP OP1 OP2 TTP (1) C  (3) NO
PS023-02P-45  PS023系列	 Movement Direction  Layout  Circuit 