


PS8A-13 SERIES

SINGLE POLE ROCKER SWITCHES



PANEL THICKNESS	DIM. X
0.75-1.25	19.2/19.1
1.25-2.0	19.4/19.3
2.0-3.0	19.8/19.7

Rated load:

. 8A 250VAC 10A 125VAC 1/2HP 250VAC.

. 1/4HP 125VAC 1/4HP 250VAC.

. 12A 125VAC

. 6A/12A 250VAC.

. 6(4)A 250VAC.

. Initial contact resistance: 50m Ω max.

. Insulation resistance: 100M Ω .

Withstand voltage:

. 1,500VAC for terminal to terminal.

. 3000VAC for terminal to frame.

. Mechanical life: 100,000 cycles

. Electrical life: 10,000 cycles.

Switch for the environmental protection:

. Terminals type: quick contact and soldering.

. Working temperature: $\leq 105^{\circ}\text{C}$

Working force: $550 \pm 250\text{gf}$.

Main material:

. Body and actuator: PA66 or PC.





. Terminals and movable contact: brass.

PS8A-13		B	1	B	3	1	H	2	02						
Type model															
Body color		Actuator type		Actuator color		Actuator mark		Switch function		Terminal shape		ROHS		Remark	
Symbol	Color	Symbol	shape	Symbol	color	Symbol	Sketch map	Symbol	Function	Sketch map	Symbol	Character	Sketch map	Symbol	Character
B	Black	1	Arc	B	black	1		2	ON-OFF		H	soldering		1	ROHS(nought sign)
W	White	2	Plane	R	red	3		3	ON-OFF-ON					2	Halogen Free
		3	Waterproof plane	W	white	6									
		4	Waterproof arc	G	Green	24									





PS8A-13 SERIES

SINGLE POLE ROCKER SWITCHES





PS8A-13-B1R3-2H-02

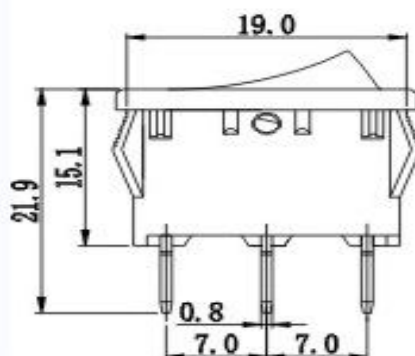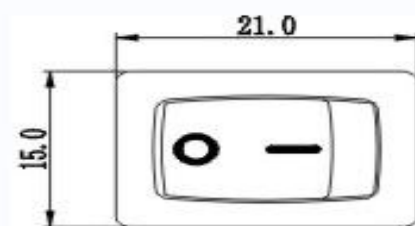


PS8A-13-B1G3-2H-02

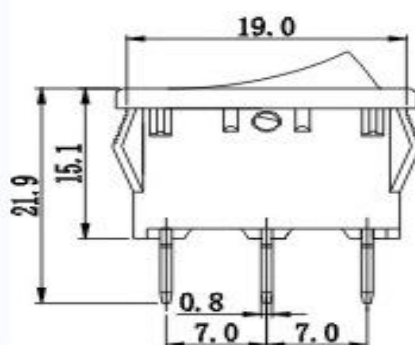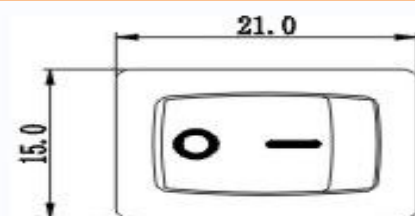


PS8A-13-W1R3-2H-02

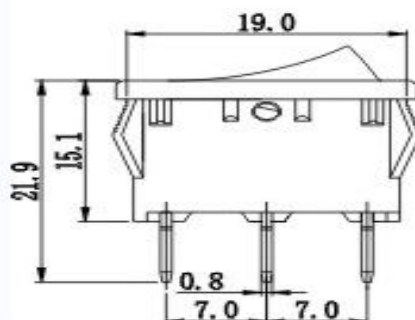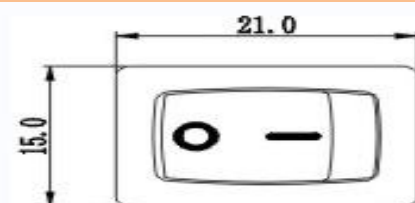


PS8A-13-B1B1-3H-01

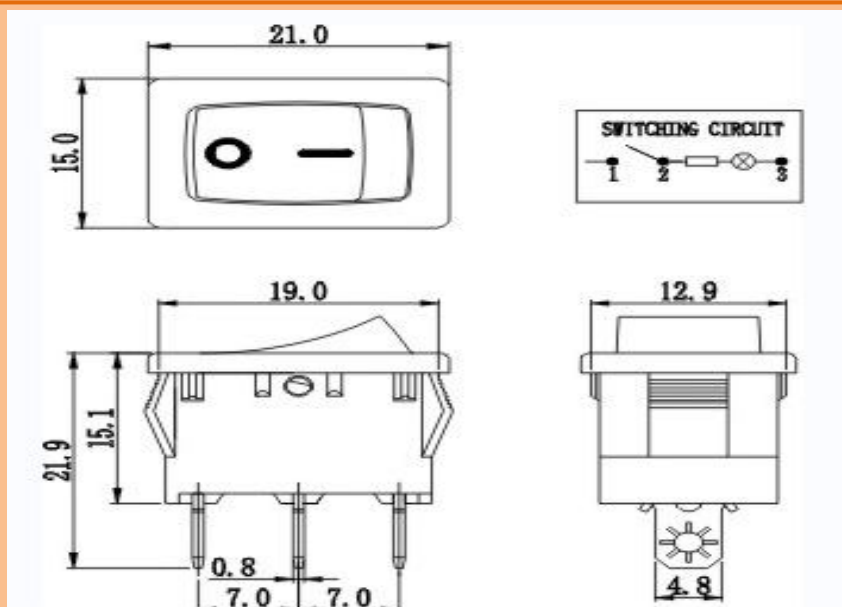


PS8A-13-B1B6-3H-01

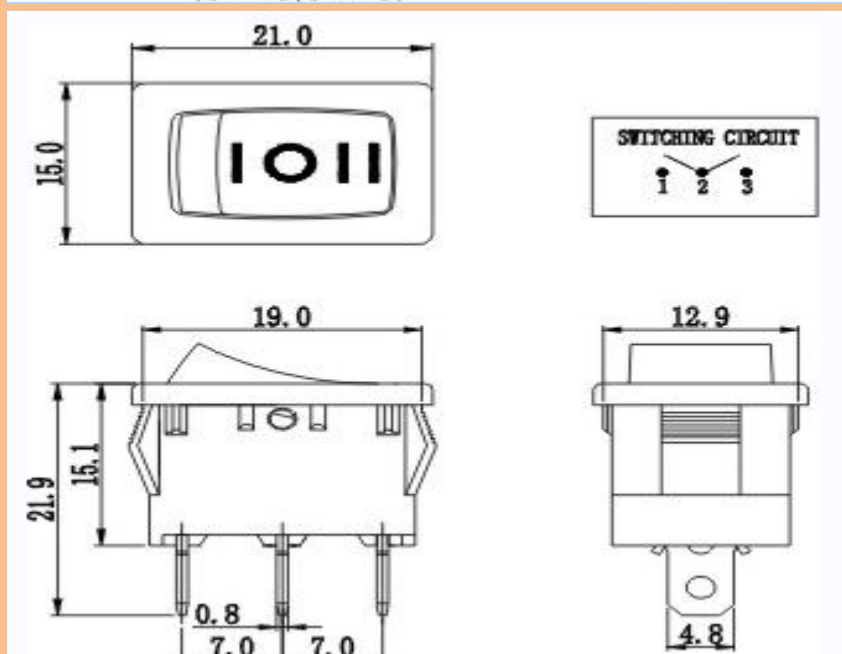

PS8A-13-W1W6-3H-01

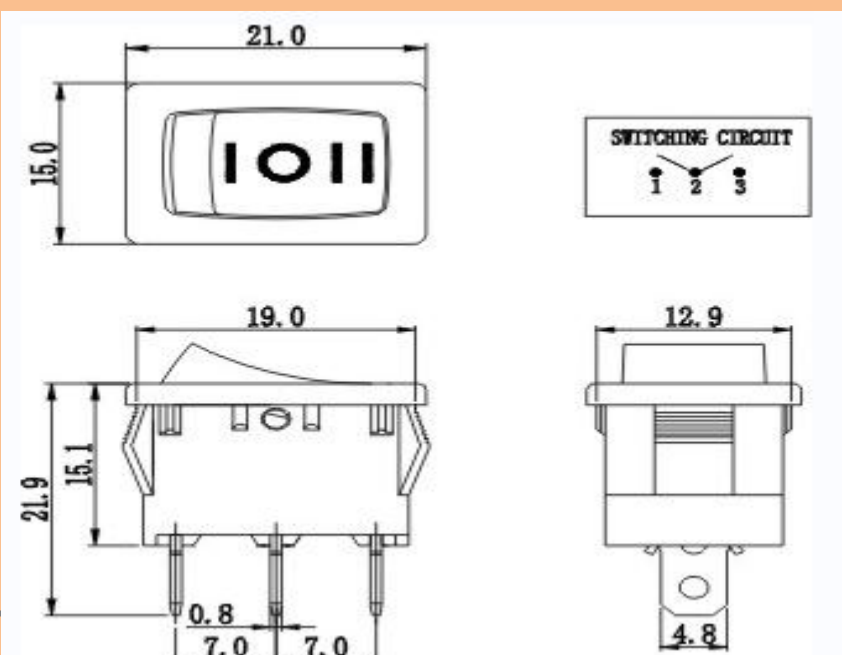

PS8A-13-B1B24-3H-01

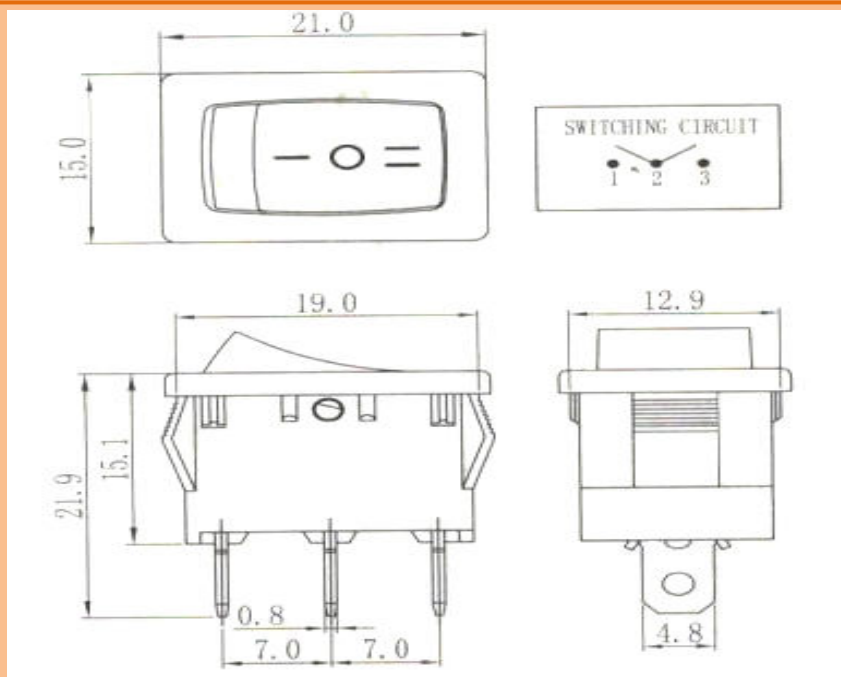

PS8A-13-B1R6-3H-01

