


PS8A-2 SERIES

SINGLE POLE ROCKER SWITCHES

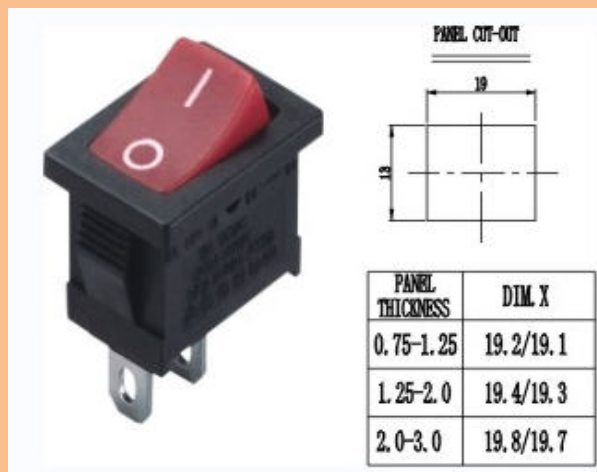

Rated load:

. 8A 250VAC 10A 125VAC 1/2HP 250VAC.

. 1/4HP 125VAC 1/4HP 250VAC.

. 12A 125VAC

. 6A/12A 250VAC.

. 6(4)A 250VAC.

. Initial contact resistance: 50m Ω max.

. Insulation resistance: 100M Ω .

Withstand voltage:

. 1,500VAC for terminal to terminal.

. 3000VAC for terminal to frame.

. Mechanical life: 100,000 cycles

. Electrical life: 10,000 cycles.

Switch for the environmental protection:

. Terminals type: quick contact and soldering.


. Working temperature: $\leq 105^{\circ}\text{C}$

Working force: $550 \pm 250\text{gf}$.

Main material:

. Body and actuator: PA66.


. Terminals and movable contact: brass.

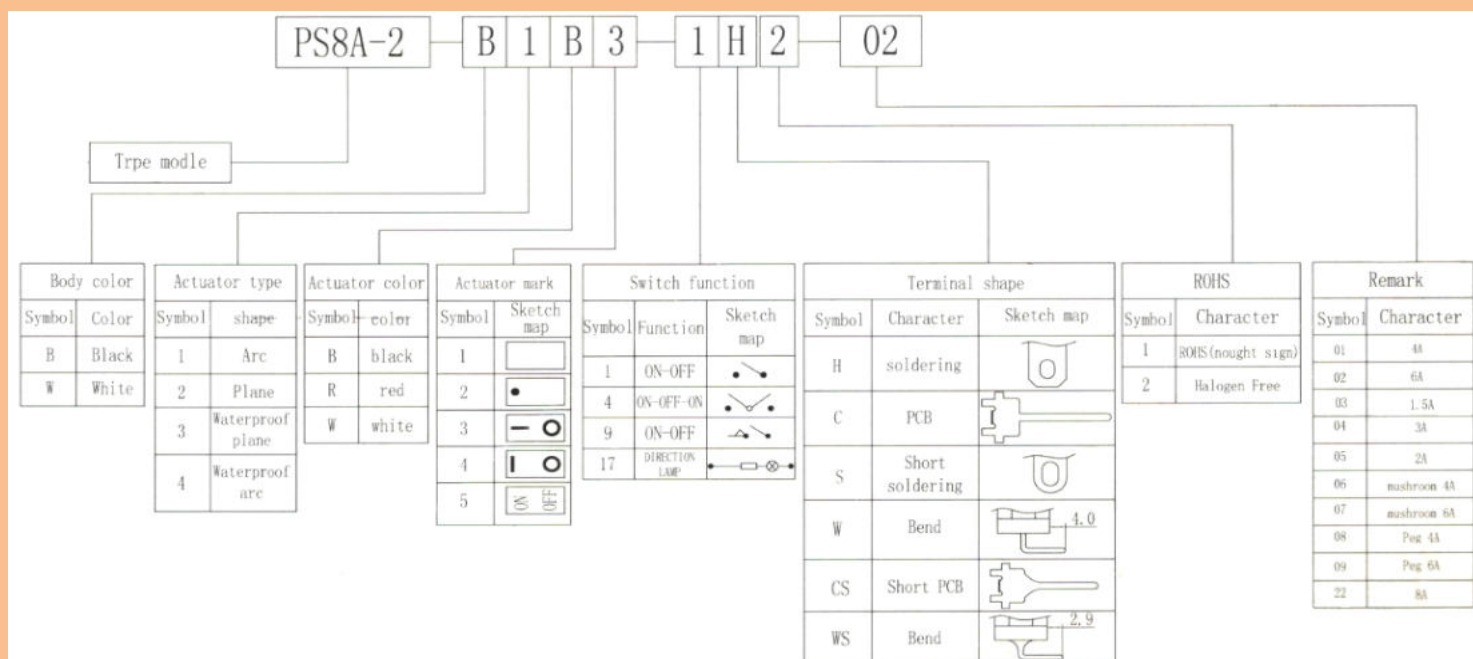


PS8A-2 SERIES

SINGLE POLE ROCKER SWITCHES


PS8A-2-B4B3-1H-02

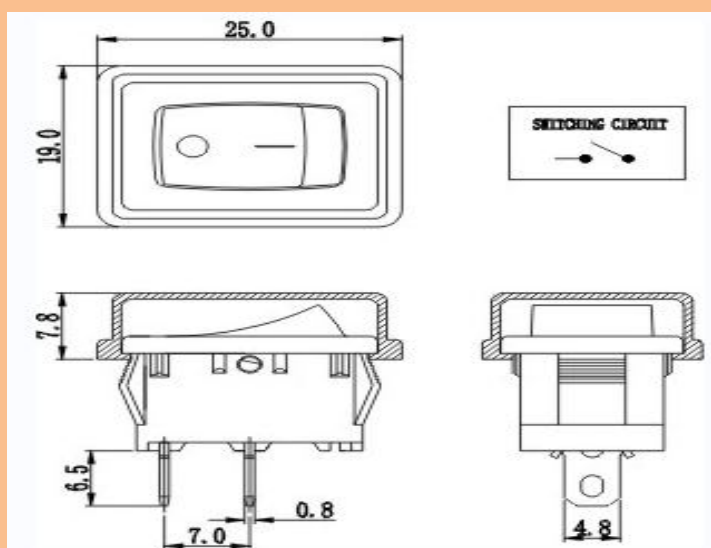


PS8A-2-B1R3-9C-04

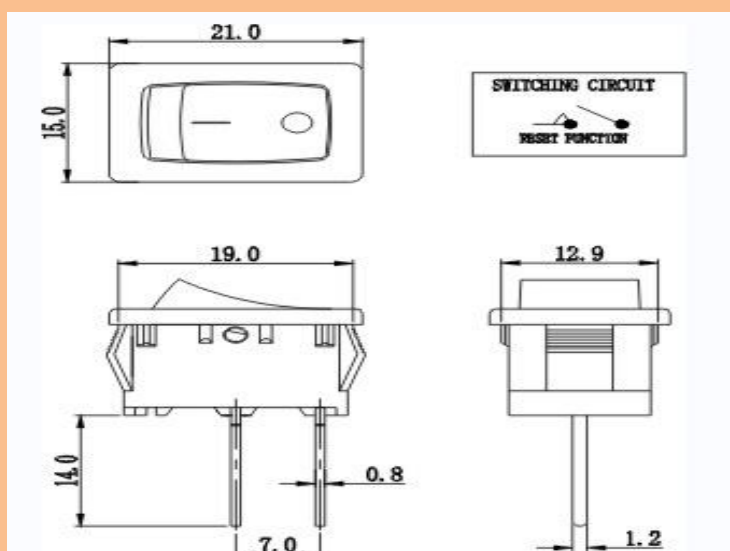


PS8A-2-B1B3-1HF-03

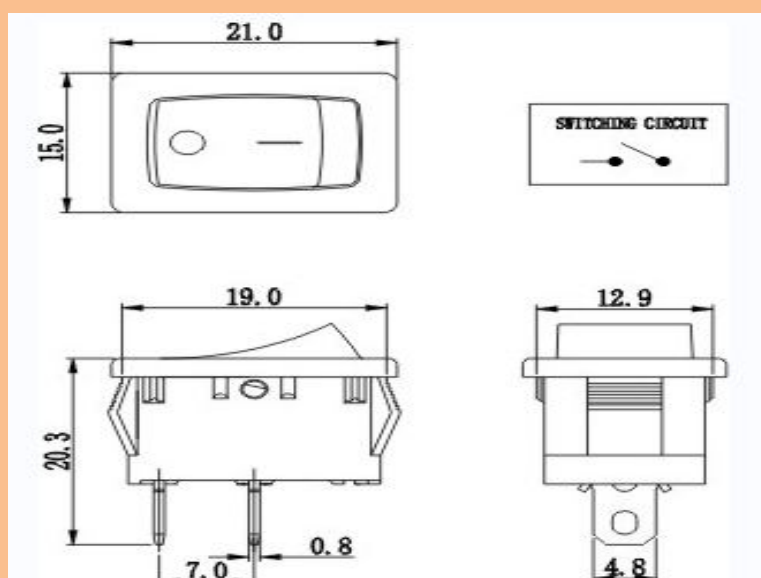


PS8A-2-B1B3-1CS-04

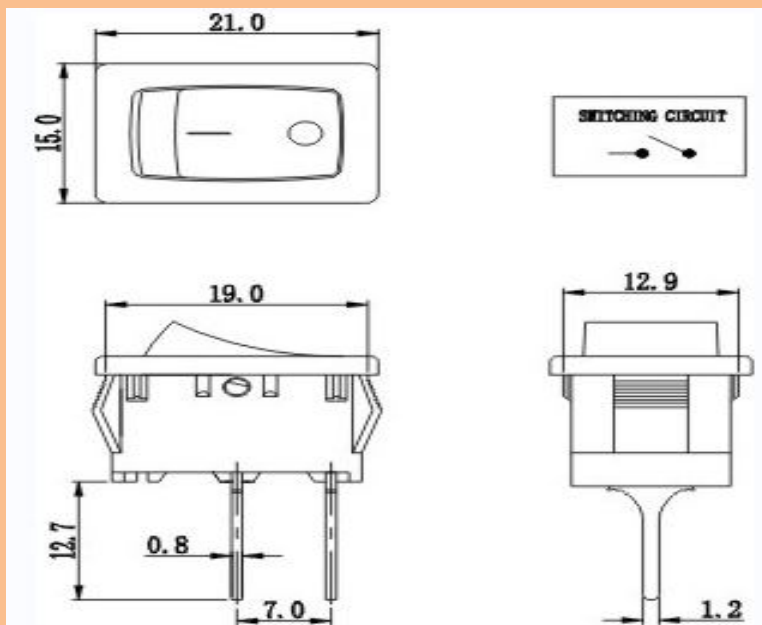


PS8A-2-B1B3-1W-08

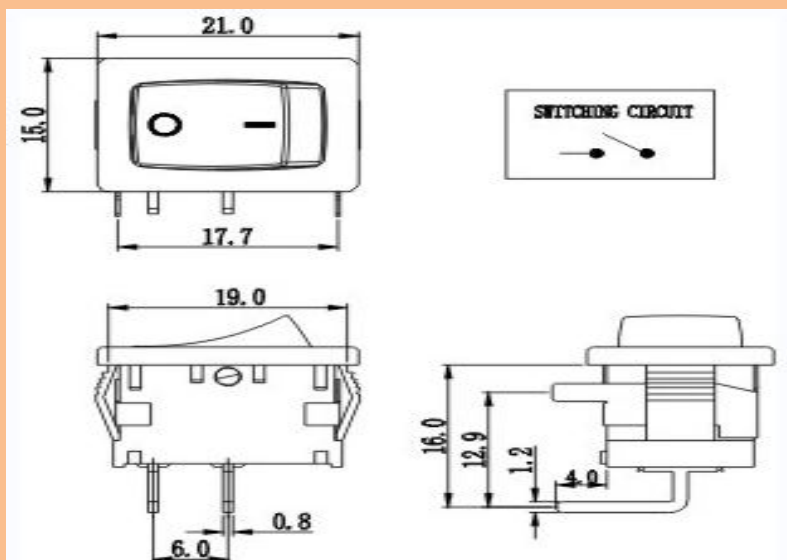


PS8A-2E-B1B3-1W-02

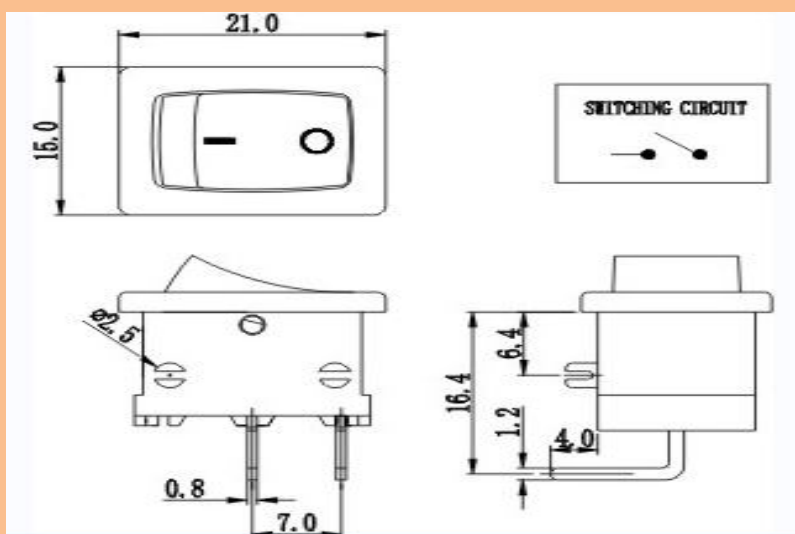


PS8A-2-B1B3-4WS-01

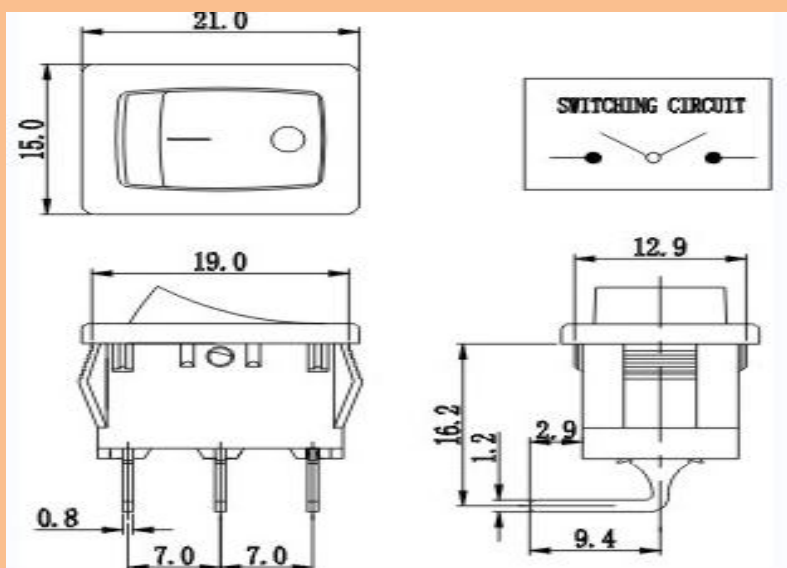


PS8A-2-B1B3-4S-04

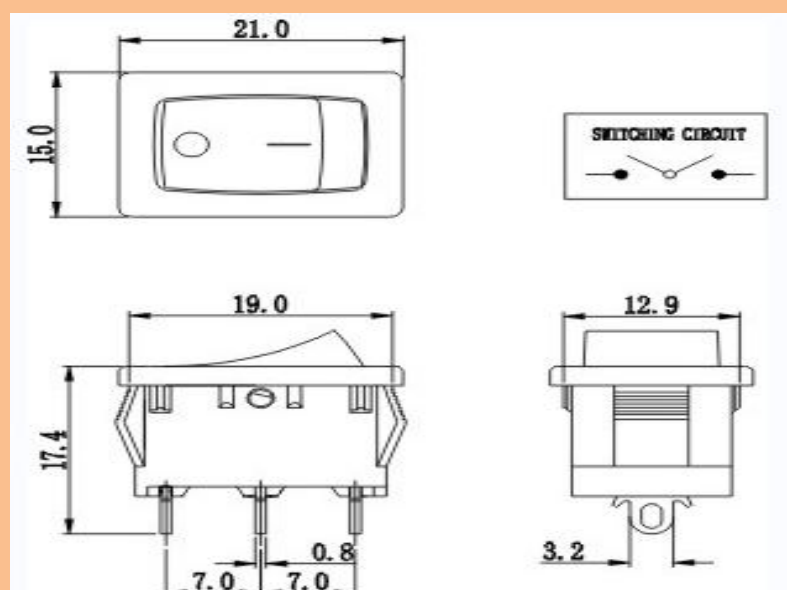


PS8A-2-B1B3-1W-04

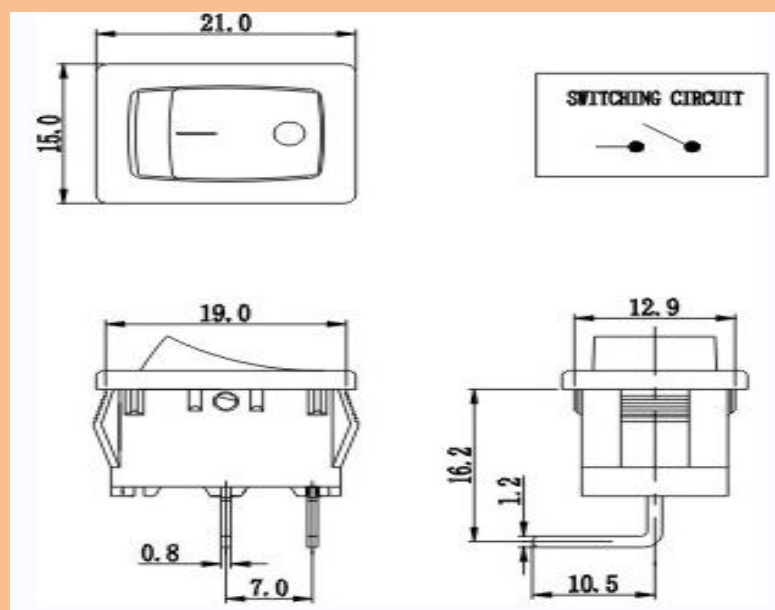

PS8A-13-B2G1-17H

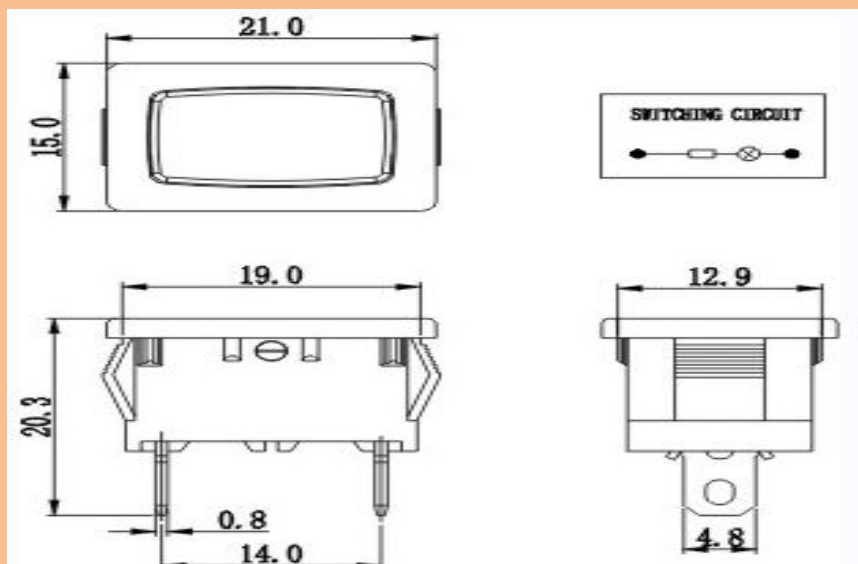

PS8A-2-B1B3-4H-02

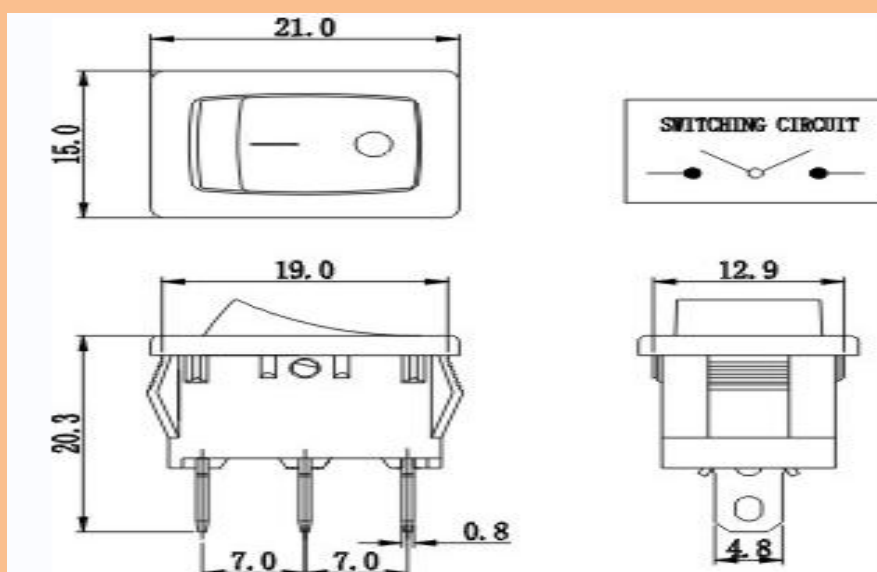

PS8A-2-W1W3-1H-02

