


PS8A-4 SERIES

DOUBLE POLE ROCKER SWITCHES

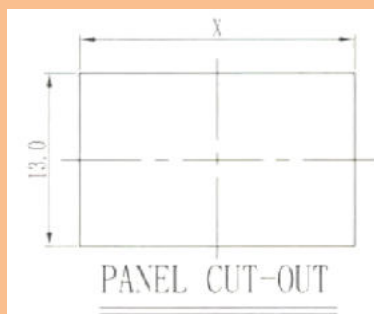

PANEL THICKNESS	DIM. X
0.75-1.25	19.2/19.1
1.25-2.0	19.4/19.3
2.0-3.0	19.8/19.7

Rated load:

- . 8A 250VAC 10A 125VAC 1/2HP 250VAC.
- . 1/4HP 125VAC 1/4HP 250VAC.
- . 6A/12A 250VAC.
- . 6(4)A 250VAC.
- . Initial contact resistance: 50m Ω max.
- . Insulation resistance: 100M Ω .

Withstand voltage:

- . 1,500VAC for terminal to terminal.
- . 3000VAC for terminal to frame.

. Mechanical life: 100,000 cycles

. Electrical life: 10,000 cycles.

Switch for the environmental protection:

. Terminals type: quick contact and soldering.

. Working temperature: $\leq 105^{\circ}\text{C}$

Working force: $700 \pm 300\text{gf}$.

Main material:

. Body: PA66


. Actuator: PA66 or PC.

. Terminals and movable contact: brass.


PS8A-4 B 1 B 3 5 H 2 10																			
Type model																			
Body shape		Body color		Actuator type		Actuator color		Actuator mark		Switch function		Terminal shape		ROHS		Remark			
Symbol	Sketch map	Symbol	Color	Symbol	shape	Symbol	color	Symbol	Sketch map	Symbol	Function	Sketch map	Symbol	Character	Sketch map	Symbol	Character		
4		B	Black	1	Arc	B	black	1		5	ON-OFF ON-OFF		II	soldering		1	ROHS (no paint sign)	10	High partition
4D		W	White	2	Plane	W	white	2		6	ON-OFF ON-OFF					2	Halogen Free	11	Low partition
						G	Green	3											
						L	Blue	4											
								5											
														ROHS		Remark			
														Symbol	Character	Symbol	Character		

PS8A-4 SERIES DOUBLE POLE ROCKER SWITCHES


PS8A-4-B1B3-5H-10

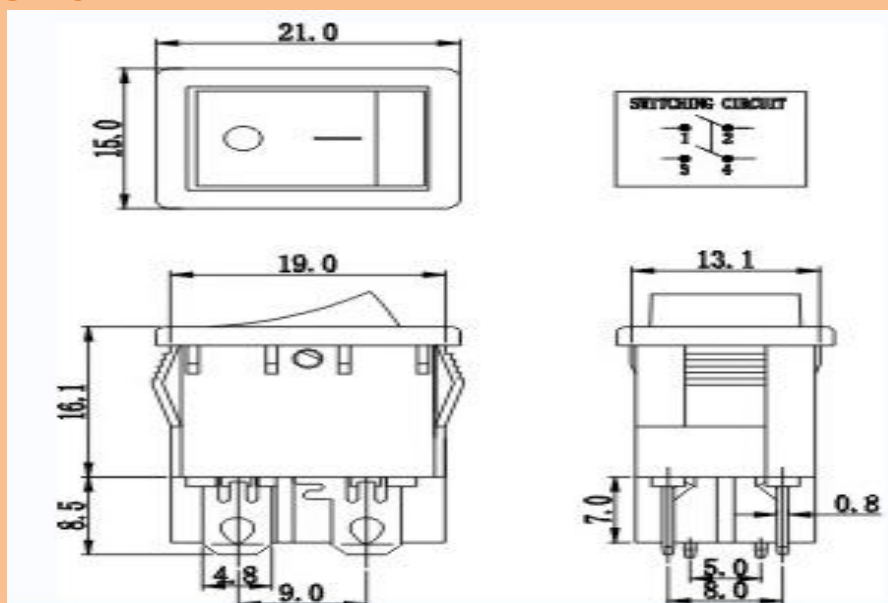


PS8A-4-B1B4-5H-11

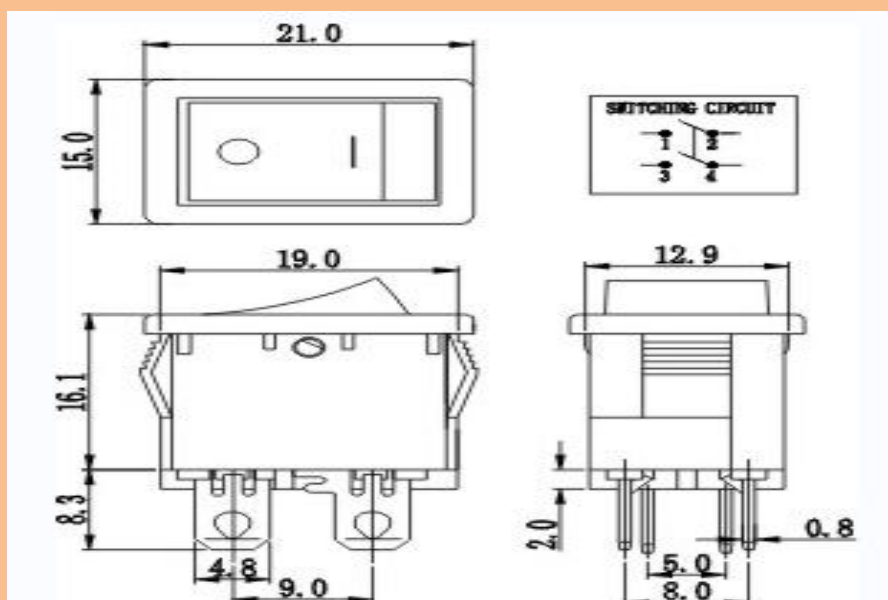


PS8A-4-B1R3-6H-10

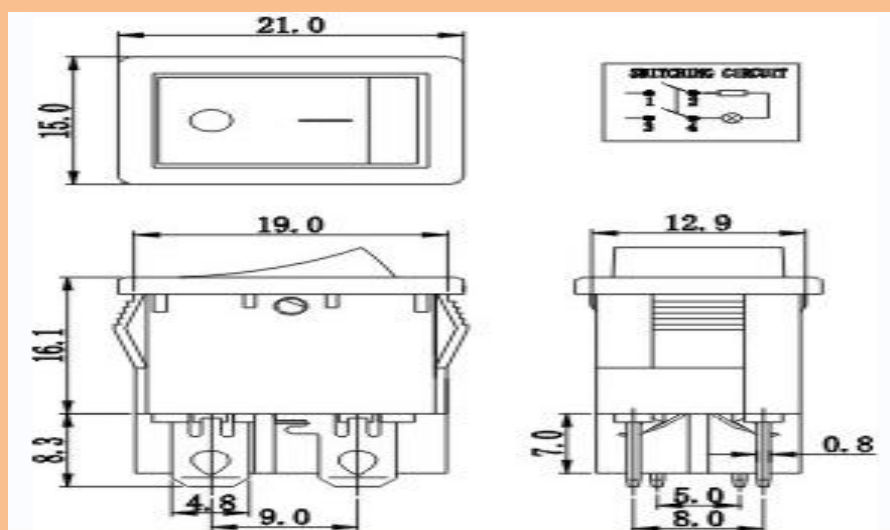


PS8A-4-B1R3-6H-11

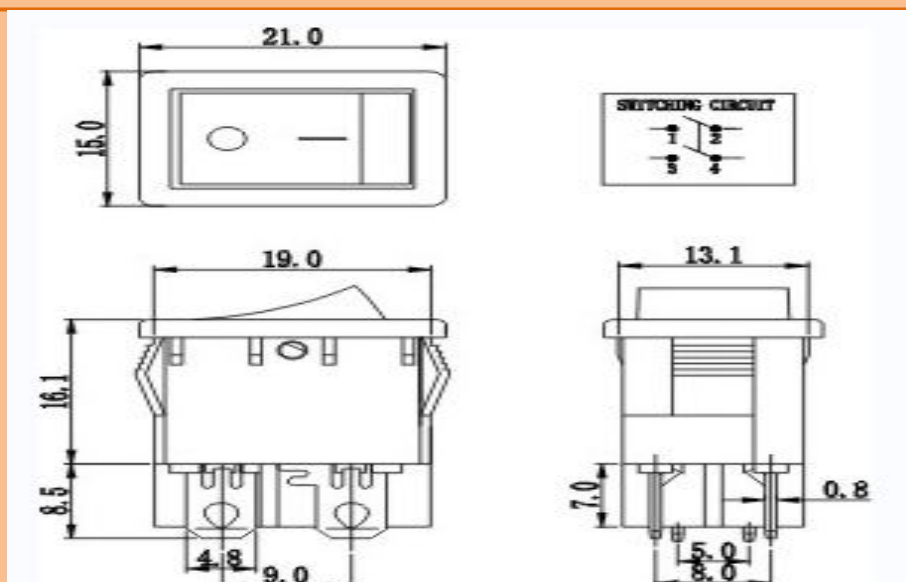



PS8A-4-B1L3-6H-10

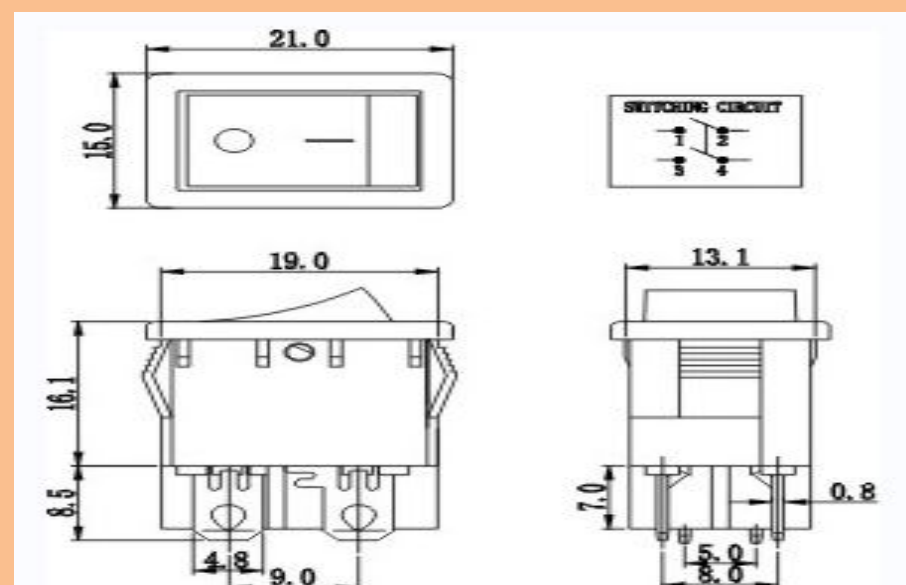

PS8A-4-B1G3-6H-11

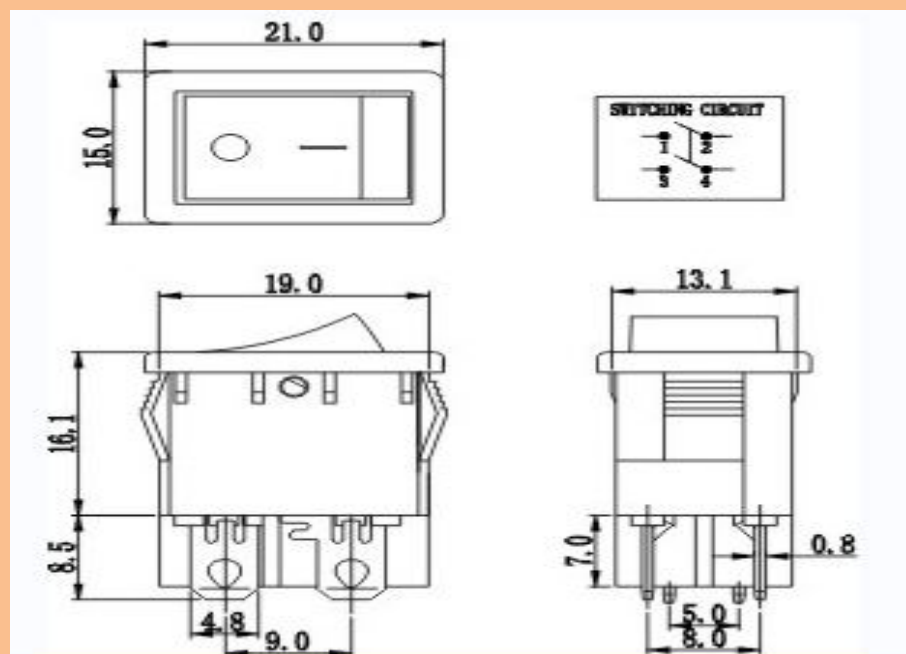

PS8A-4D-B1B3-5H-10

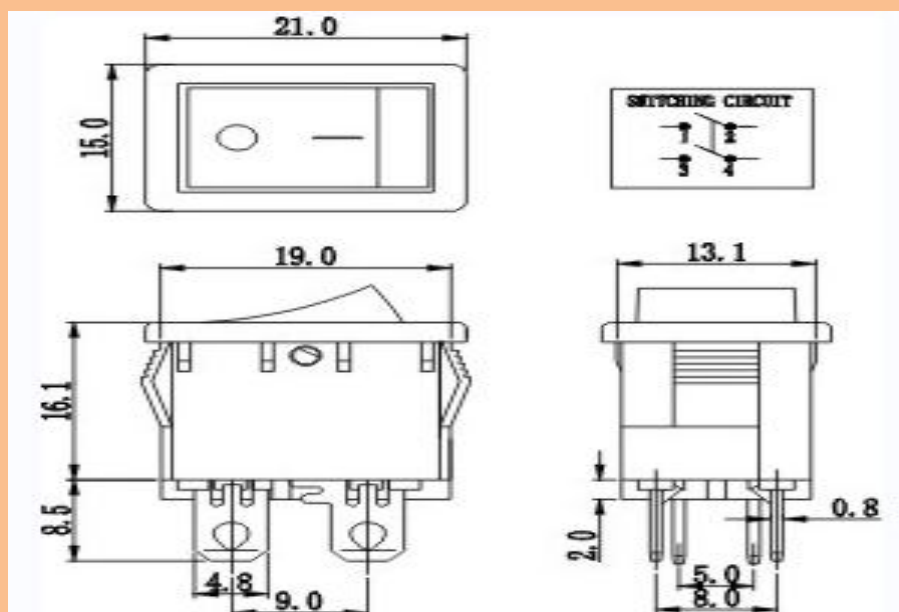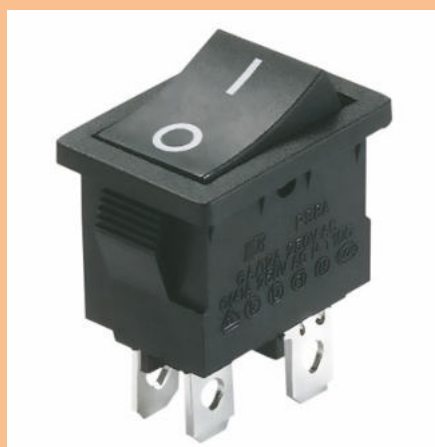

PS8A-4D-B1B3-5H-11

