

PS8A-7 SERIES

SINGLE POLE ROCKER SWITCHES

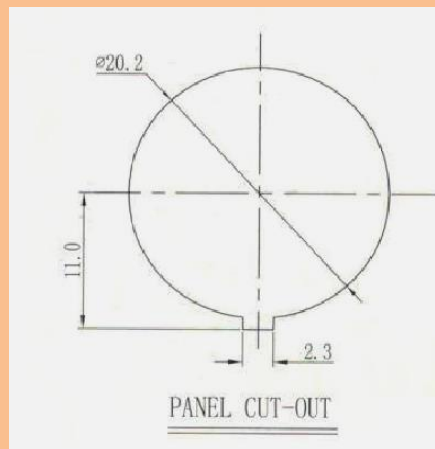


Rated load:

- . 8A 250VAC 10A 125VAC 1/2HP 250VAC.
- . 6A/12A 250VAC.
- . 6(4)A 250VAC.
- . Initial contact resistance: 50m Ω max.
- . Insulation resistance: 100M Ω .

Withstand voltage:

- . 1,500VAC for terminal to terminal.
- . 3000VAC for terminal to frame.



. **Mechanical life:** 100,000 cycles

. **Electrical life:** 10,000 cycles.

Switch for the environmental protection:

. **Terminals type:** quick contact and soldering.

. **Working temperature:** $\leq 105^{\circ}\text{C}$

Working force: $550 \pm 250\text{gf}$.

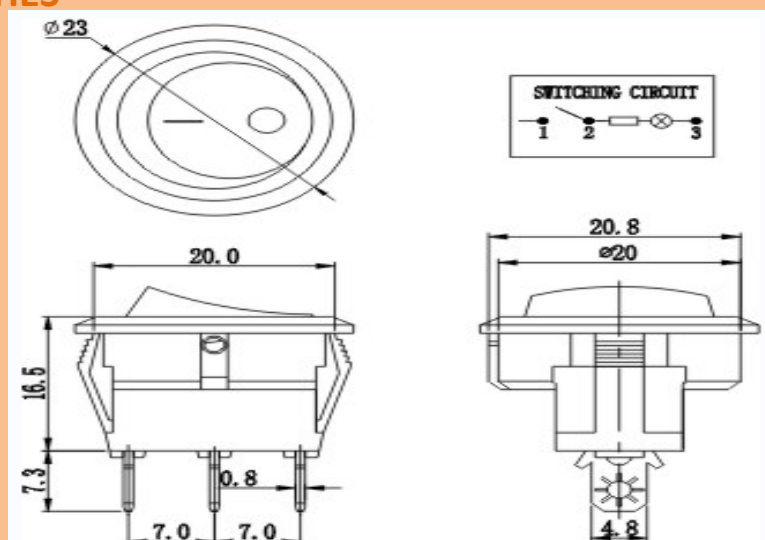
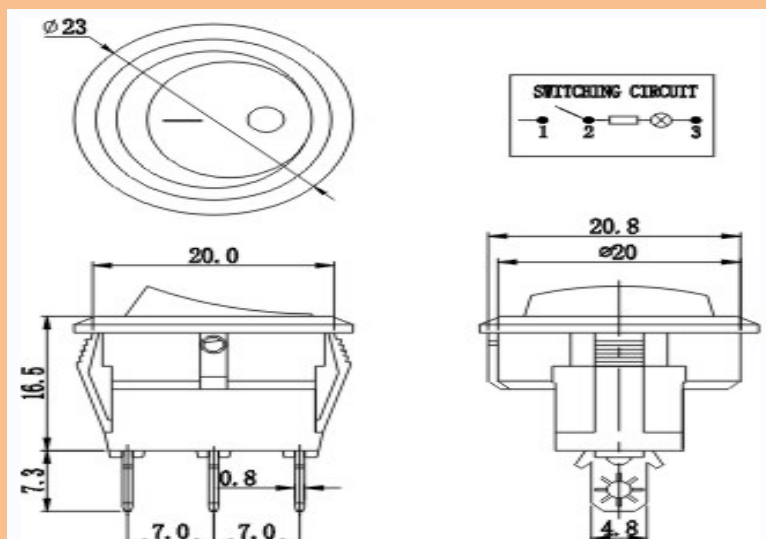
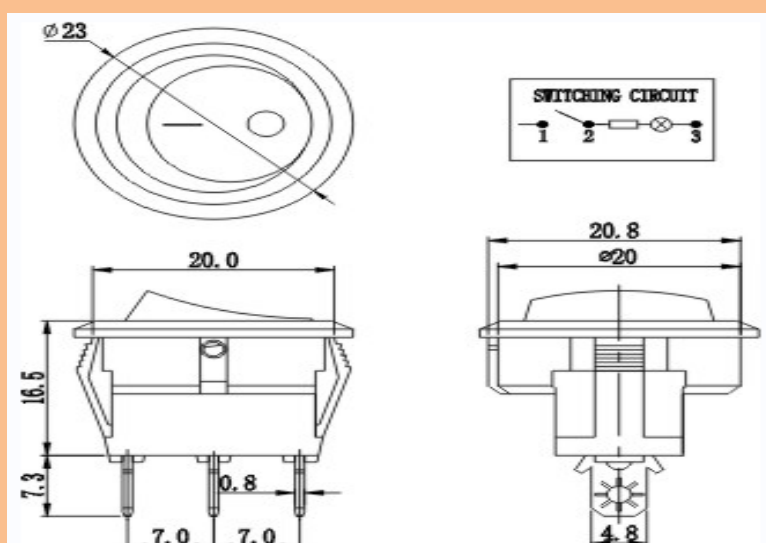
Main material:

. **Body and actuator:** PA66 or PC.

. **Terminals and movable contact:** brass.

PS8-7		B 1 R 3		2 H 2		02	
Type model							
Body color		Actuator type		Actuator color		Actuator mark	
Symbol	Color	Symbol	shape	Symbol	color	Symbol	Sketch map
B	Black	1	Arc	B	black	1	
W	White	2	Plane	R	red	2	
				W	white	3	
				G	Green	4	
Switch function		Terminal shape		ROHS		Remark	
Symbol	Function	Symbol	Character	Symbol	Character	Symbol	Character
2	ON-OFF	H	soldering	1	ROHS (nought sign)	02	6A
				2	Halogen Free		

PS8A-7 SERIES SINGLE POLE ROCKER SWITCHES

PS8A-7-B1R3-2H-02**PS8A-7-W1R3-2H-02****PS8A-7-B1G3-2H-02**

PS8A-7-B1W3-2H-02

