


PS8A-8 SERIES
DOUBLE POLE ROCKER SWITCHES

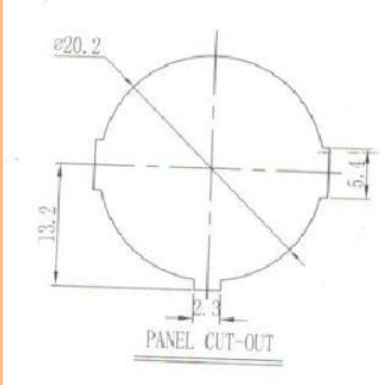

PANEL THICKNESS	DIM. X
0.75-1.25	20.2
1.25-2.0	20.4
2.0-3.0	20.8

Rated load:

- . 8A 250VAC 10A 125VAC 1/2HP 250VAC.
- . 1/4HP 125VAC 1/4HP 250VAC.
- . 6A/12A 250VAC.
- . 6(4)A 250VAC.
- . Initial contact resistance:50m Ω max.
- . Insulation resistance:100M Ω .

Withstand voltage:

- . 1,500VAC for terminal to terminal.
- . 3000VAC for terminal to frame.

. Mechanical life:100,000 cycles

. Electrical life:10,000 cycles.

Switch for the environmental protection:

. Terminals type:quick contact and soldering.

. Working temperature:≅ 105℃


Working force:550±250gf.

Main material:


.Body: PA66

. Actuator : PA66 or PC.


. Terminals and movable contact:brass.

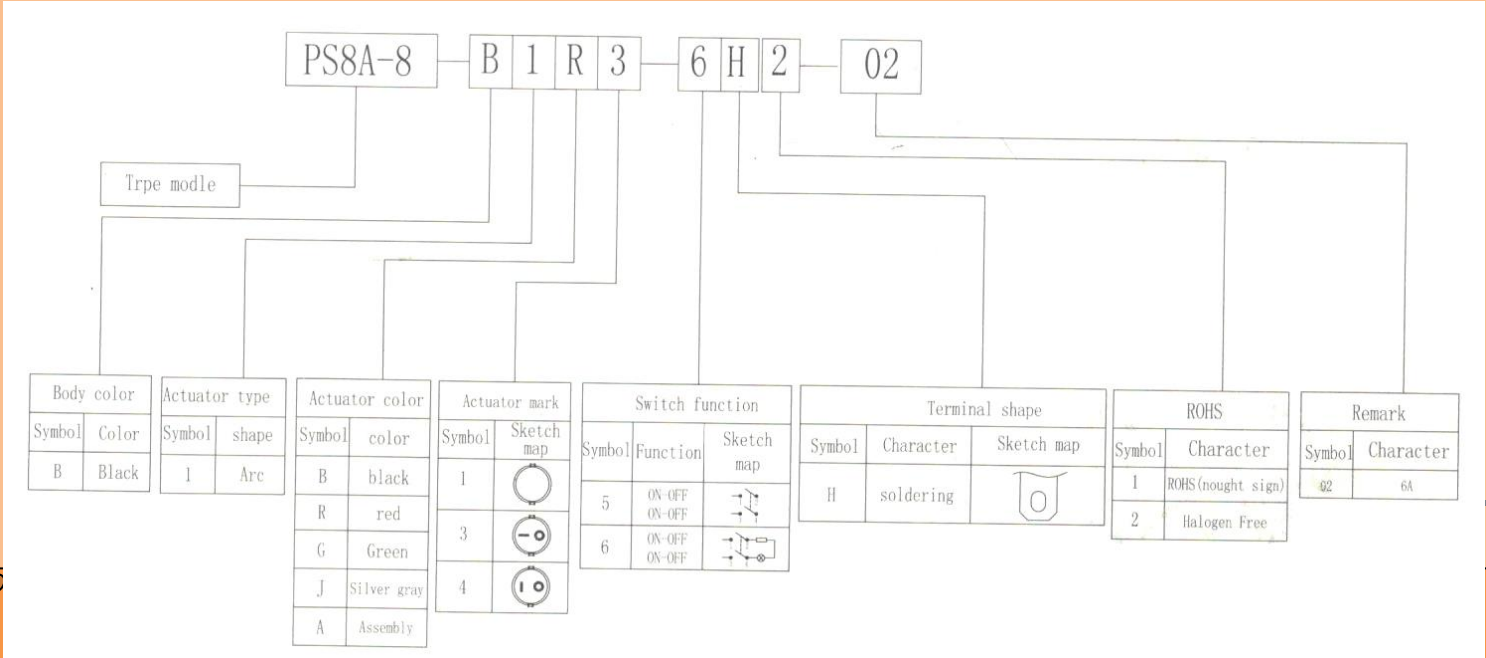


PS8A-8-B1R3-6H-10

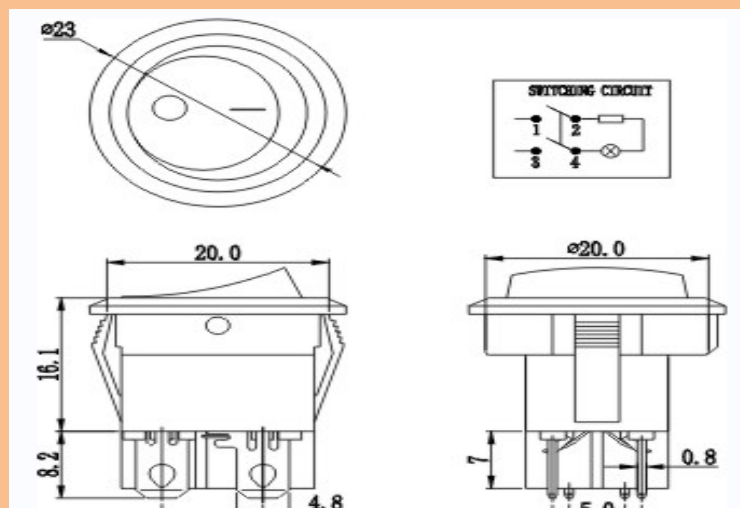

PS8A-8-B1B3-5H-10

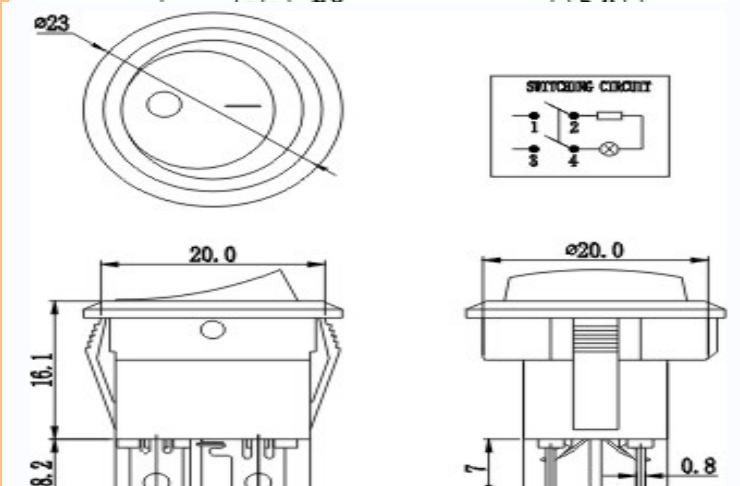

PS8A-8-B5G3-6H-10

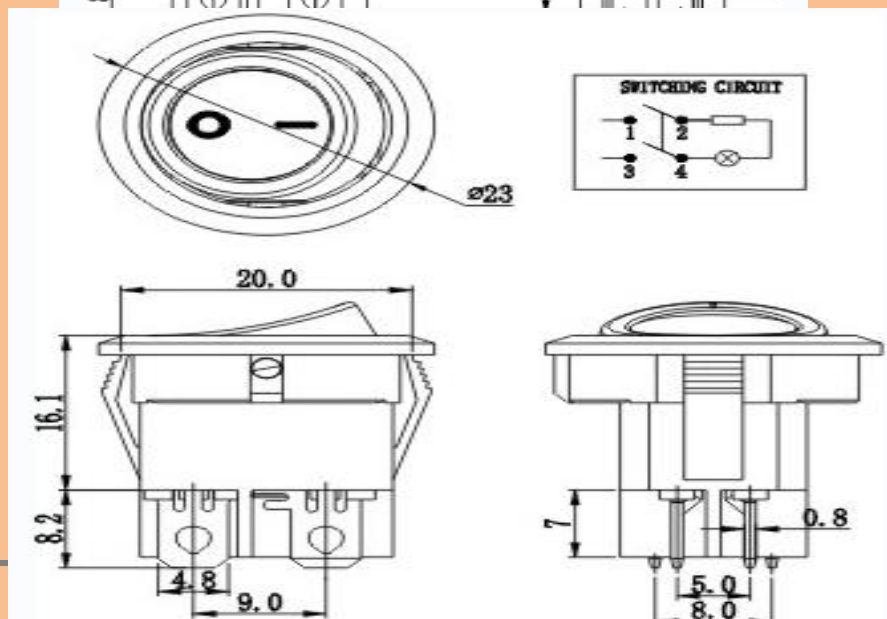

PS8A-8-B6L3-6H-10

