


PS8A-9 SERIES

DOUBLE POLE ROCKER SWITCHES

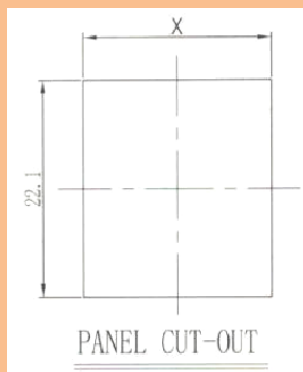

PANEL THICKNESS	DIM. X
0.75-1.25	19.2/19.1
1.25-2.0	19.4/19.3
2.0-3.0	19.8/19.7

Rated load:

. 8A 250VAC 10A 125VAC 1/2HP 250VAC.

. 1/4HP 125VAC 1/4HP 250VAC.

. 6A/12A 250VAC.

. 6(4)A 250VAC.

. Initial contact resistance: 50m Ω max.

. Insulation resistance: 100M Ω .

Withstand voltage:

. 1,500VAC for terminal to terminal.

. 3000VAC for terminal to frame.

. Mechanical life: 100,000 cycles

. Electrical life: 10,000 cycles.

Switch for the environmental protection:

. Terminals type: quick contact and soldering.

. Working temperature: $\leq 105^{\circ}\text{C}$


Working force: $700 \pm 300\text{gf}$.

Main material:


. Body: PA66

. Actuator: PA66.


. Terminals and movable contact: brass.

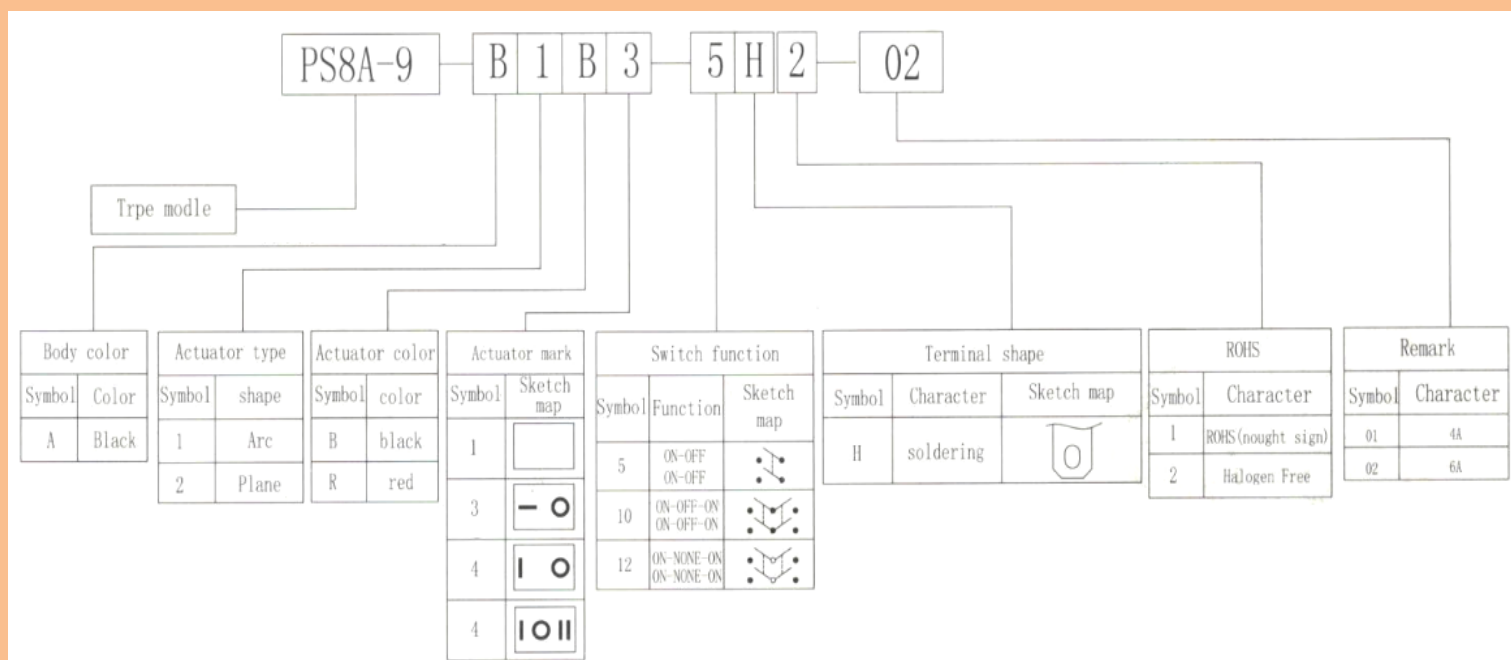

PS8A-9-B1B3-5H-02

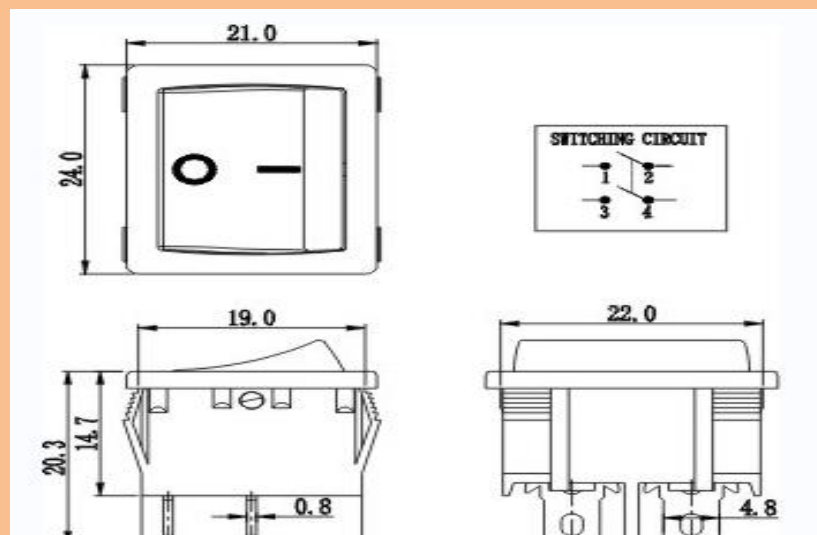

PS8A-9-B1B3-12H-01

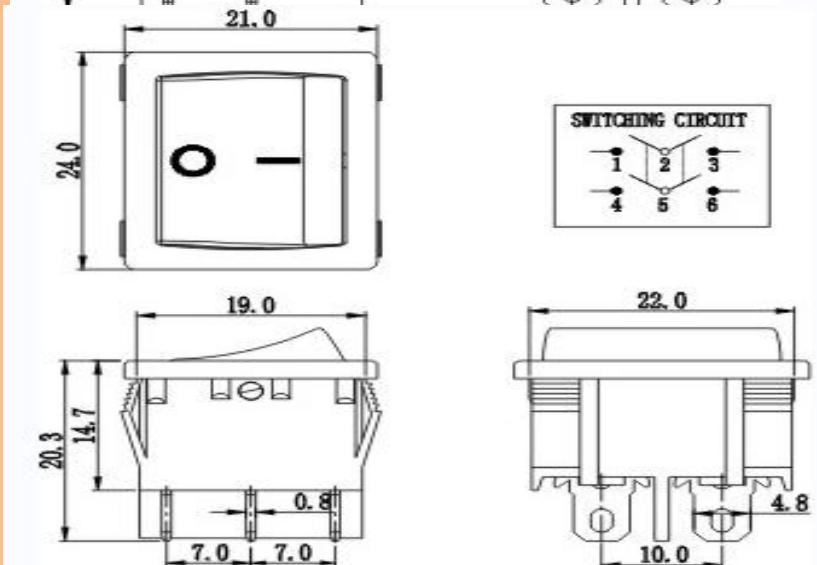

PS8A-9-B1B6-10H-01

