


PS8C-12 SERIES

SINGLE POLE ROCKER SWITCHES



PANEL THICKNESS	DIM. X
0.75~1.25	30.1/30.0
1.25~2.0	30.3/30.2
2.0~3.0	30.6/30.5

Rated load:

- . 16A 250VAC 1/4HP
- . 20A 125VAC 1/4HP 250VAC 3/4HP.
- . 16(4)A 250VAC.
- . Initial contact resistance: 50m Ω max.
- . Insulation resistance: 100M Ω .

Withstand voltage:

- . 1,500VAC for terminal to terminal.
- . 3000VAC for terminal to frame.

. Mechanical life: 100,000 cycles

. Electrical life: 10,000 cycles.

Switch for the environmental protection:

. Terminals type: quick contact and soldering.

. Working temperature: $\leq 105^{\circ}\text{C}$


Working force: $550 \pm 250\text{gf}$.

Main material:


. Body: PA66

. Actuator : PA66 or PC.


. Terminals and movable contact: brass.

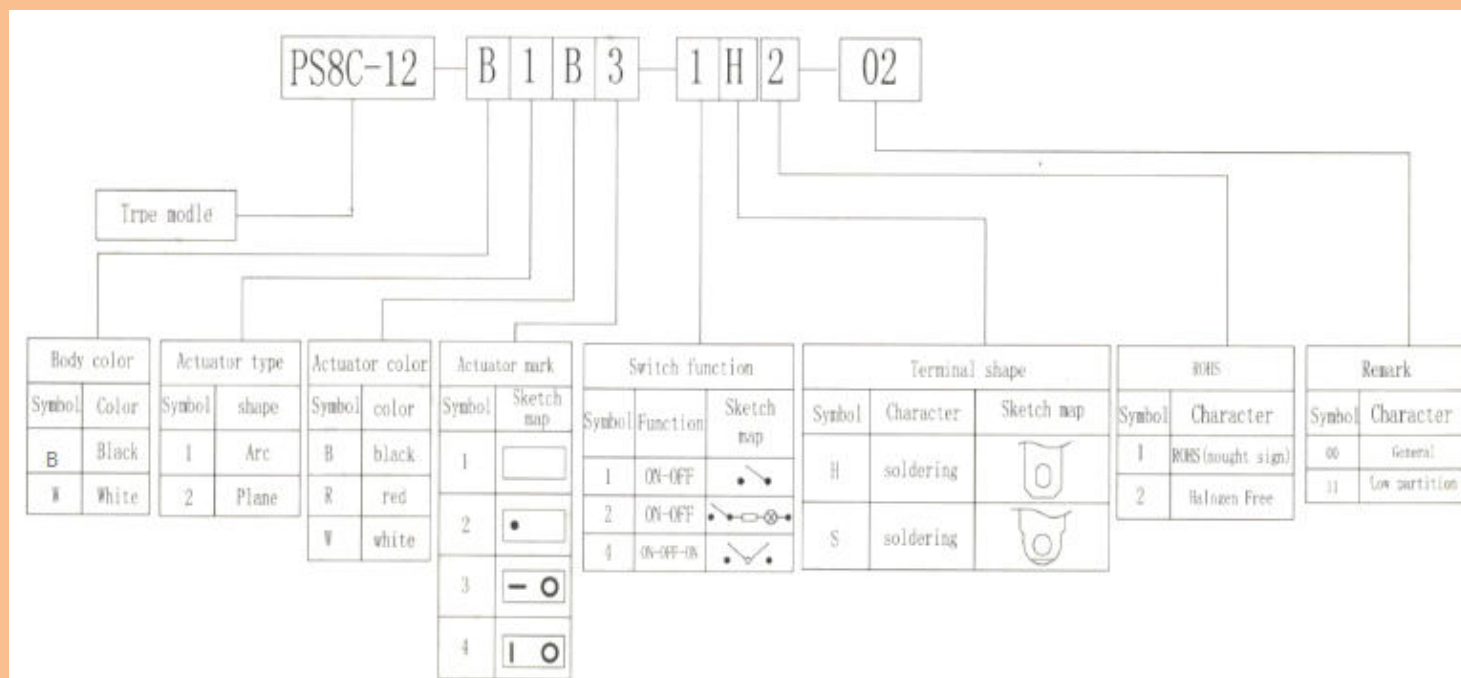


PS8C-12 SERIES **SINGLE POLE ROCKER SWITCHES** **PS8C-12-B1B3-1H-11**

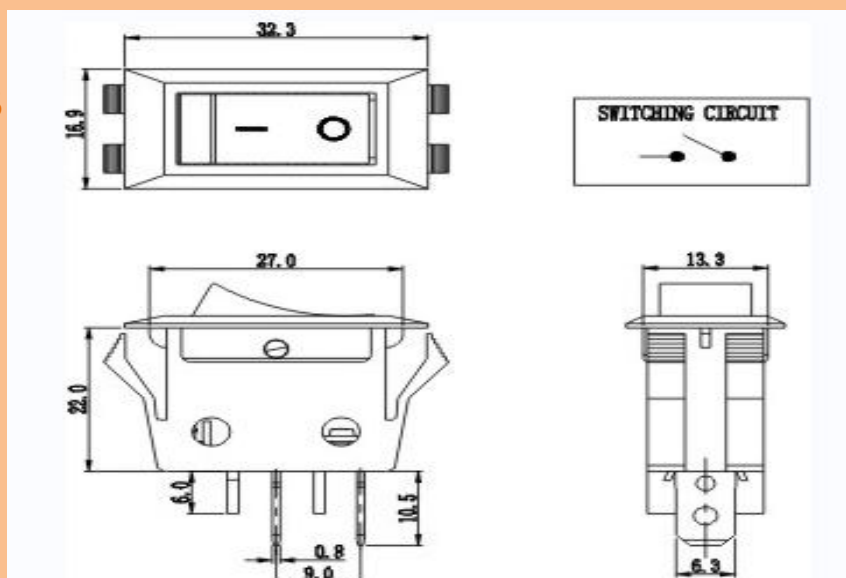


PS8C-12-B1R3-1H-00

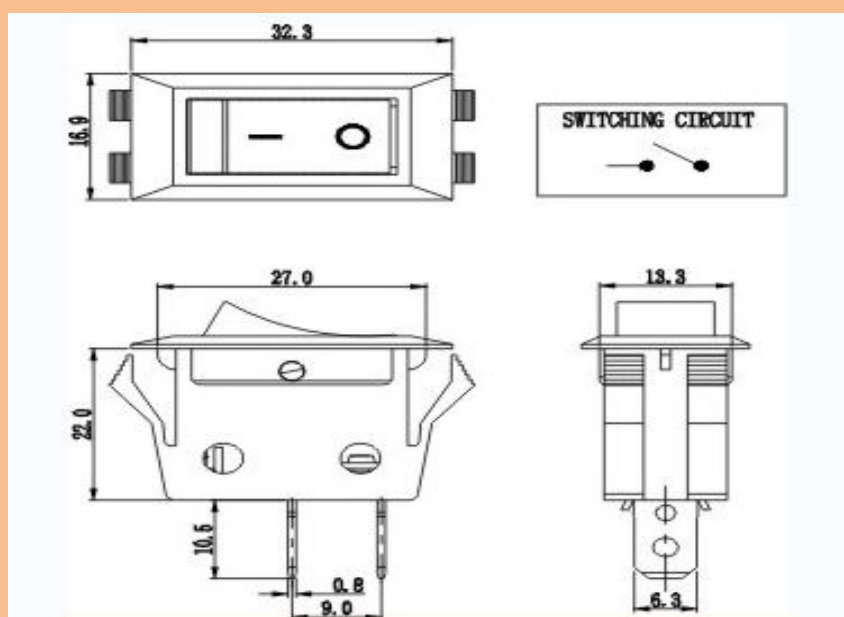


PS8C-12-B1R2-2H-11

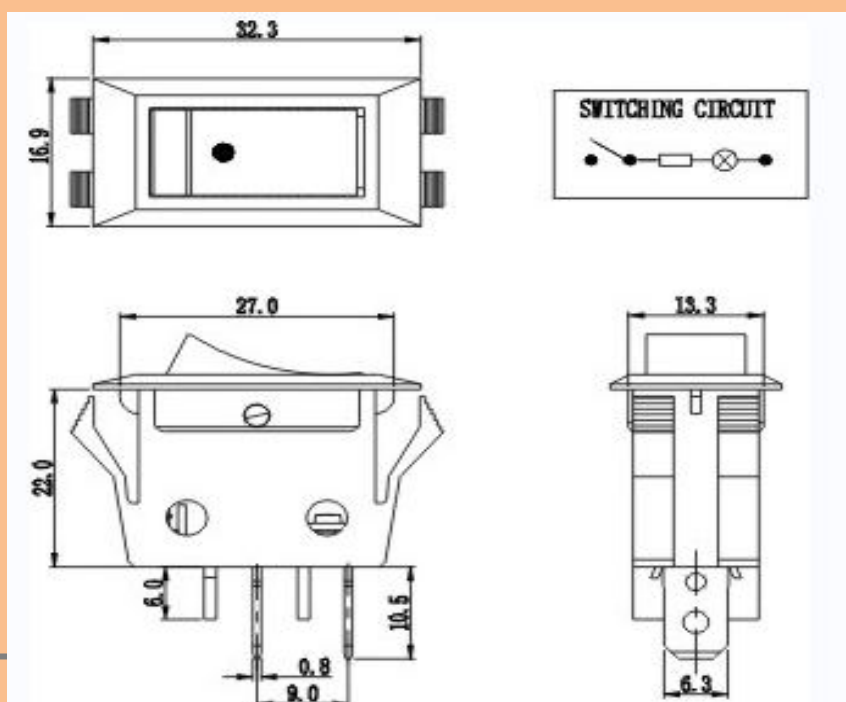

PS8C-12-B1R3-2H-00

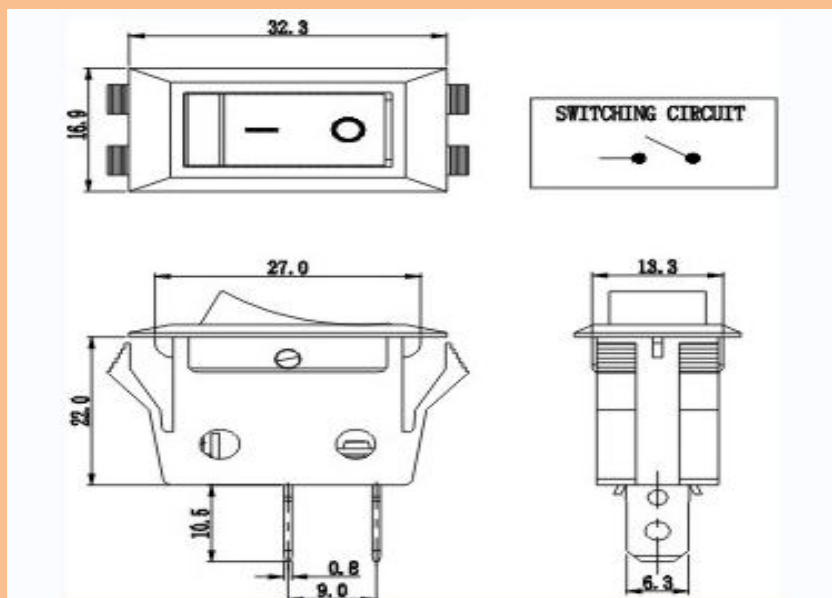

PS8C-12-B1R3-1S-00

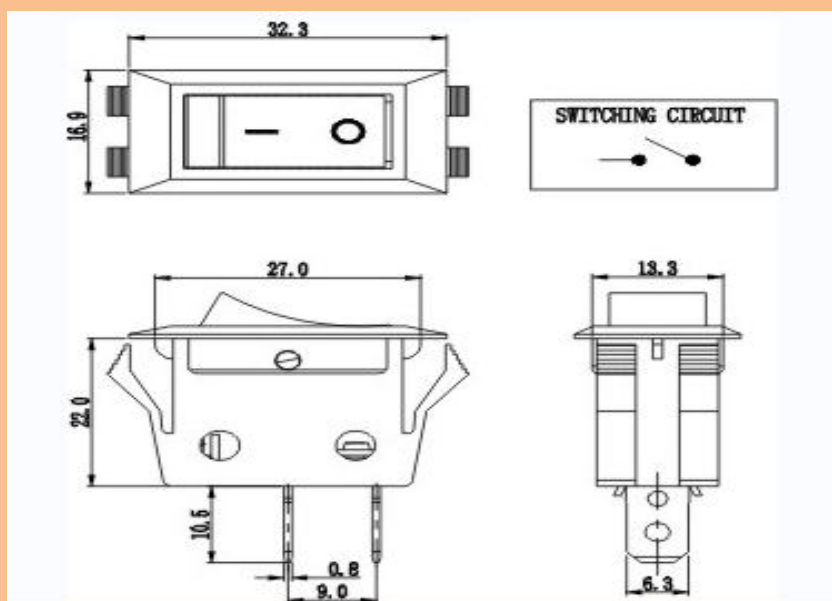

PS8C-12-B1R2-2S-00

