



8. SUGGESTED PANEL HOLE SIZE:

PANEL THICKNESS	DIM. X
0.75±1.25	30.1/30.0
1.25±2.0	30.3/30.2
2.0±3.0	30.6/30.5

7. CIRCUIT DIAGRAM:



- 1? FUNCTION: ON-OFF-ON
ON-OFF-ON
- 2? RATING: UL: 16A 250VAC 1/4HP 20A 125VAC 1/4HP 250VAC 3/4HP
ENEC VDE/CQC: 16(4)A 250VAC T105
- 3? OPERATION FORCE: 650±350gf
- 4? CONTACT RESISTANCE: ≤ 50 mΩ
- 5? INSULATION RESISTANCE: ≤ 100 MΩ
- 6? DIELECTRIC WITHSTAND : TERMINAL TO BUTTON 3000VAC/5mA/1MINUTE
TERMINAL TO TERMINAL 1500VAC/5mA/1MINUTE

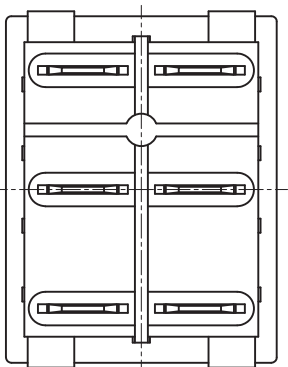

TOLERANCE/UNECESS SPECIFIED

.X:±0.30 .XX:±0.15 ANGULAR:±3.0°			
----------------------------------	--	--	--

PROJECTION

UNIT: mm	SCALE: NOT SCALE	DESCRIPTIONS OF REVISION	APPD.
----------	------------------	--------------------------	-------

TITLE: ROCKER SWITCH

MODEL: PS8C-5-B1B6-10H-10	FUNCTION: ON-OFF-ON	DRWG NO.: BEJ-FH-W0536
---------------------------	---------------------	------------------------

UNIT: mm	SCALE: NOT SCALE	DRWG NO.:
MODEL: PS8C-5-B1B6-10H-10	FUNCTION: ON-OFF-ON	DWN.:
		CHK'D.:
		APPD.:

东莞市涪程电子科技有限公司

DATE	REV	DESCRIPTION
	V4.0	
2016-03-02		吴为萍
2016-03-02		冯辉
2016-03-02		谭云峰