


PS8C-6 SERIES

SINGLE POLE ROCKER SWITCHES

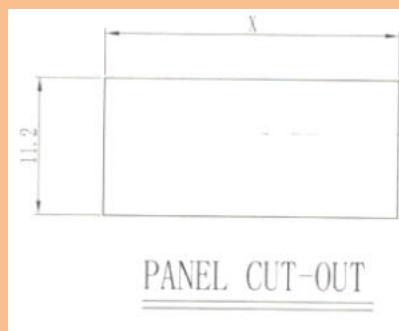

PANEL THICKNESS	DIM. X
0.75~1.25	30.1/30.0
1.25~2.0	30.3/30.2
2.0~3.0	30.6/30.5

Rated load:

- . 16A 250VAC 1/4HP
- . 20A 125VAC 1/4HP 250VAC 3/4HP.
- . 16(4)A 250VAC.
- . Initial contact resistance: 50m Ω max.
- . Insulation resistance: 100M Ω .

Withstand voltage:

- . 1,500VAC for terminal to terminal.
- . 3000VAC for terminal to frame.

. **Mechanical life:** 100,000 cycles

. **Electrical life:** 10,000 cycles.

Switch for the environmental protection:

. **Terminals type:** quick contact and soldering.

. **Working temperature:** $\leq 105^{\circ}\text{C}$


Working force: $550 \pm 250\text{gf}$.

Main material:


. **Body:** PA66

. **Actuator :** PA66 or PC.


. **Terminals and movable contact:** brass.

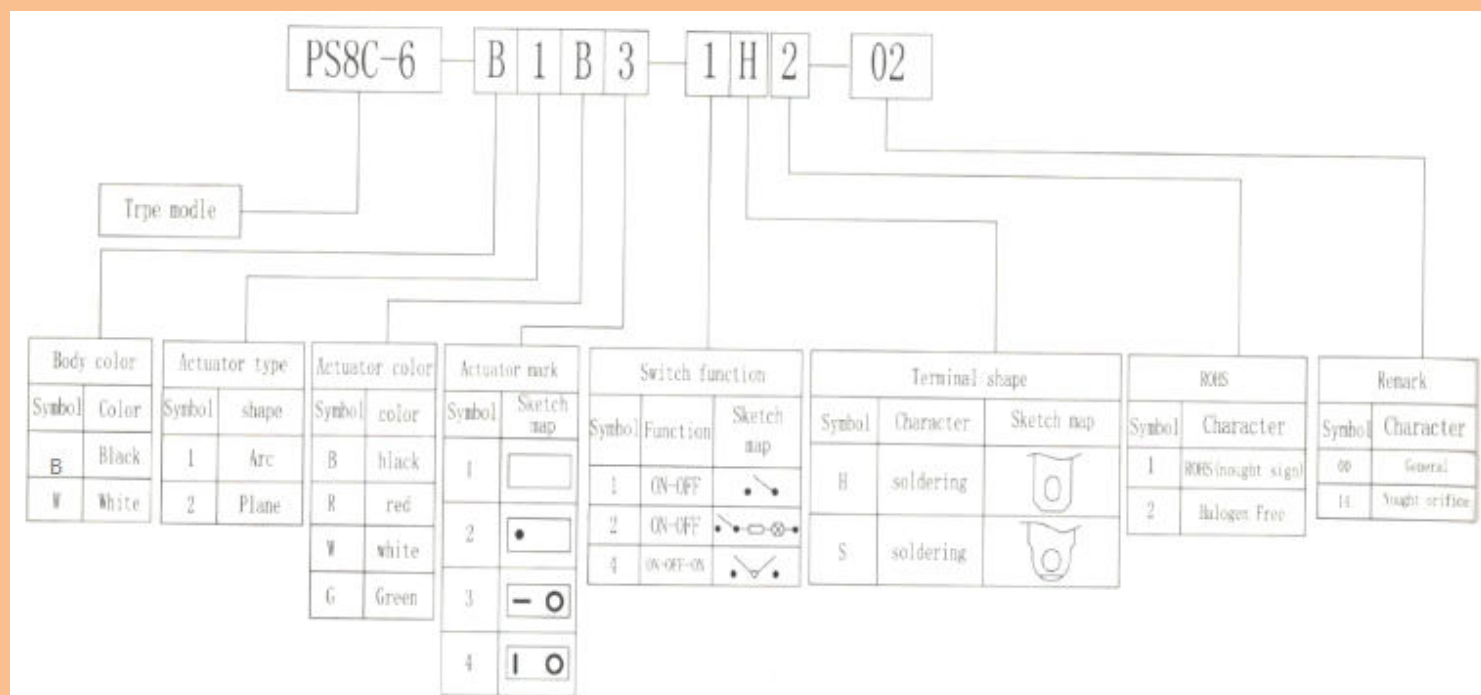


PS8C-6-B1B3-1H-00

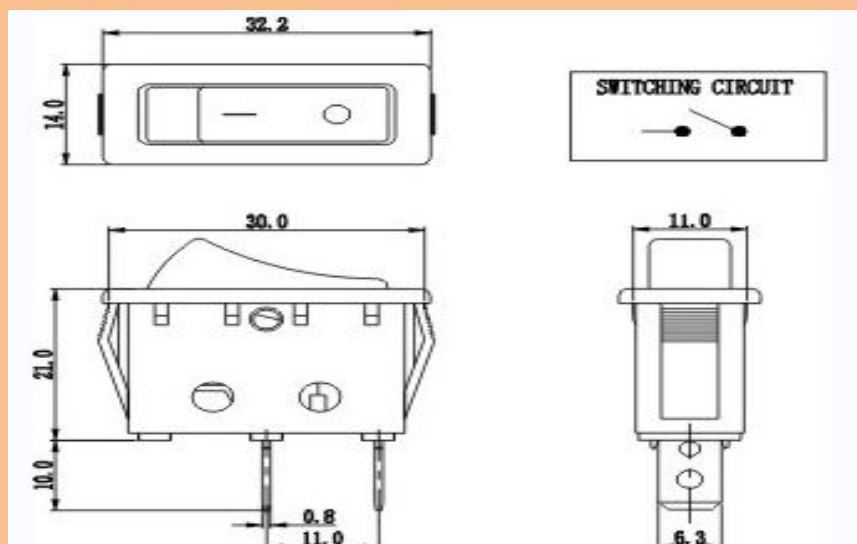


PS8C-6-B1B3-4H-14

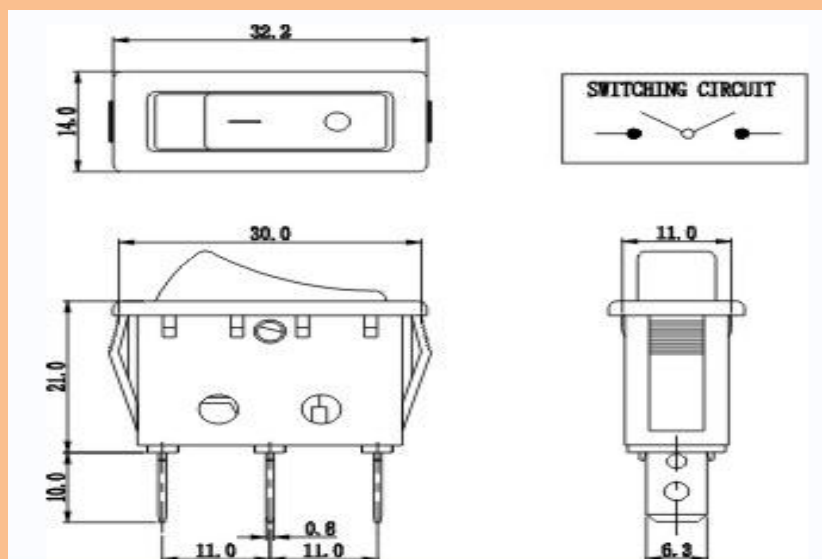


PS8C-6-B1B3-1S-00

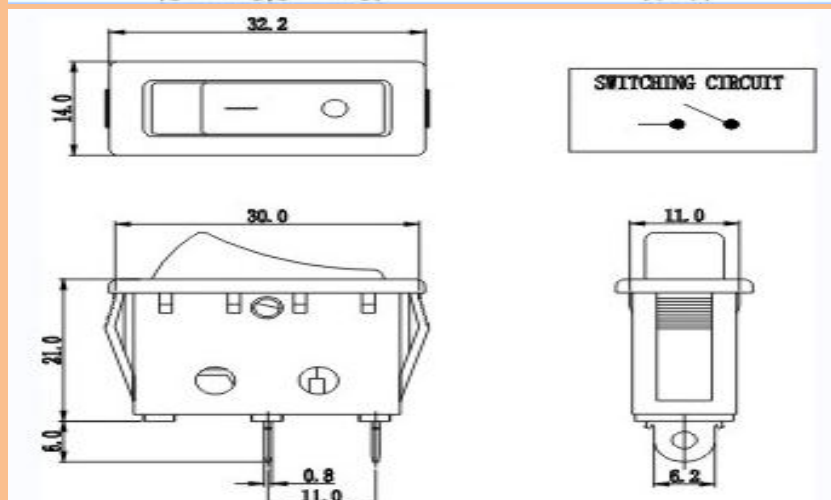

PS8C-6-B1R3-2S-00

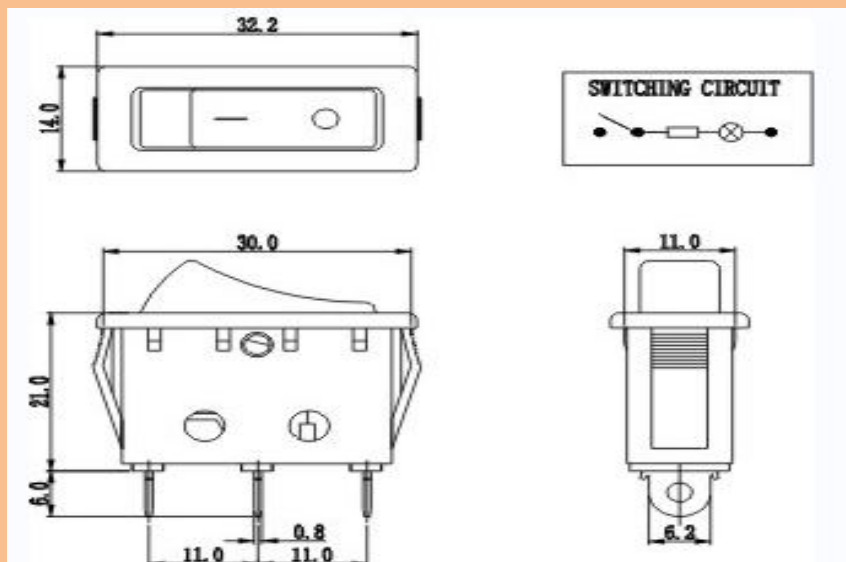

PS8C-6-B1B4-4S-00

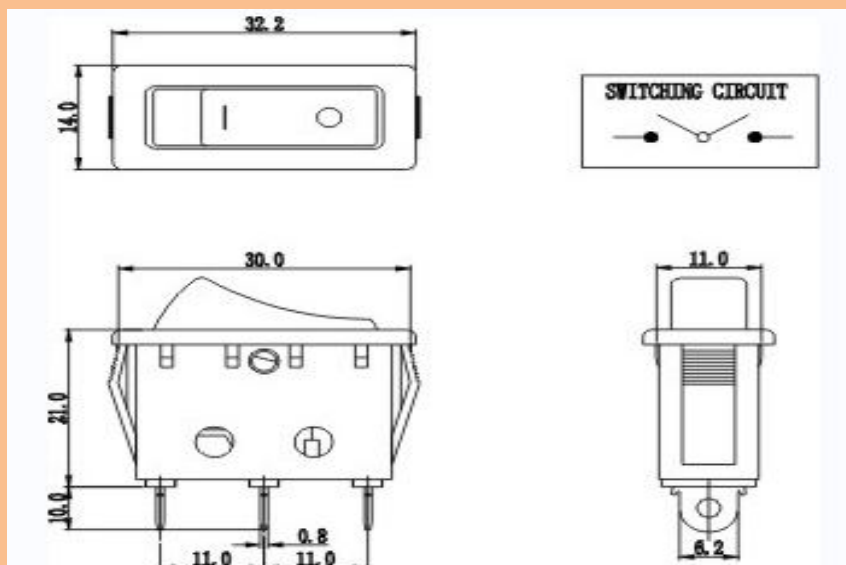

PS8C-6-B1G3-2H-00

