



1	
CUSTOMER DRAWING	

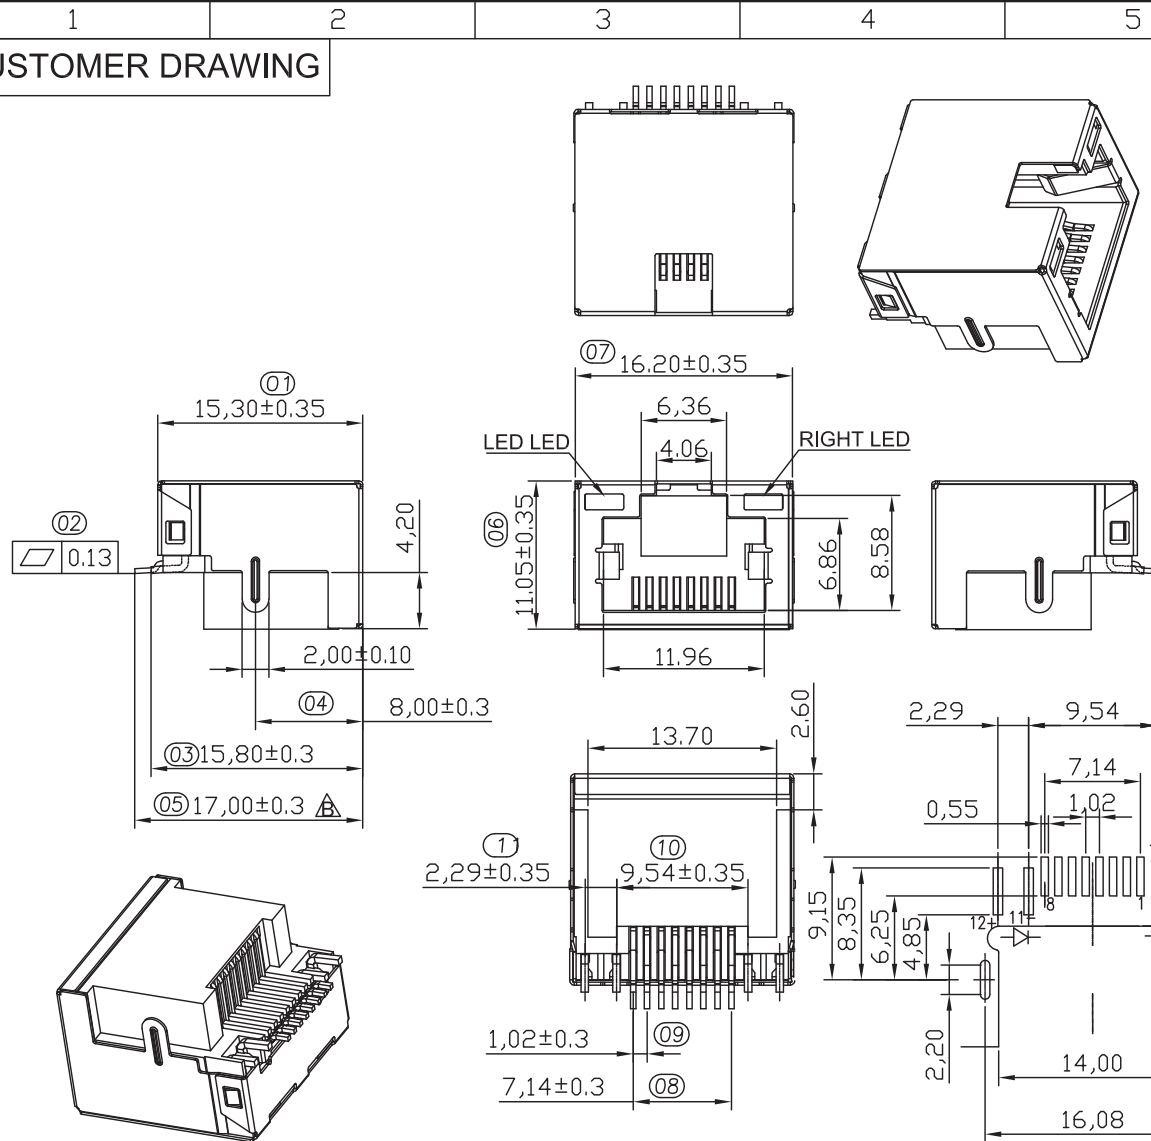

PCBLAYOUT TOP VIEW
TOL:±0.05

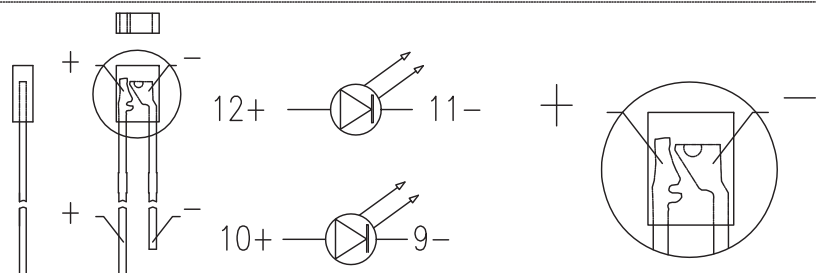

版次 REV	ECN编号	设 变 内 容 MODIFICATION	日 期 DATE	制 图 DRAW	核 准 APPROVE
A		初版发行	21-MAR-14	DOREN	DDS
B		UPDATE	01-JUL-17	DOREN	DDS

NOTES:

1. HOUSING MATERIAL:GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL:COPPER ALLOY,T=0.35.
3. PLATING: GOLD PLATED ON CONTACT AREA,
100u"MIN. TIN PLATED ON SOLDERING AREA,
50u"MIN. NICKEL PLATED OVERALL.
4. SHELL:COPPER ALLOY,T=0.20.
30u"MIN. NICKEL PLATED OVERALL.
5. LED:T=0.50. TIN PLATED.

ELECTRICAL:

1. VOLTAGE RATING: 125V AC RMS.
2. CURRENT RATING: 1.5AMP.
3. CONTACT RESISTANCE: 30MILLIOHMS MAX.
4. INSULATION RESISTANCE: 500MEGOHMS MIN @500V DC.

MECHANICAL:

1. DURRABILITY: 750 CYCLES MIN.
2. INSERTION FORCE : 22N MAX.
3. REMOVAL FORCE(WITHOUT PLUG LOCK) : 22N MAX.

ENVIRONMENTAL:

- ENVIRONMENTAL:
1. STORAGE: $-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$
 2. OPERATION: $0^{\circ}\text{C}\sim 70^{\circ}\text{C}$

*Apply to the EU standards(ROSH)

1. $(01) \sim (11)$ FOR QIP DIM.

DIMENSION IN mm [Inch]		东莞市淞恺电子有限公司	
TOLERANCE UNLESS OTHERWISE SPECIFIED		料号 FILE NO.	
		RJ310-A21	
.X± 0.35	X°± 3°	名称TITLE	
.XX± 0.25	.X°± 2°	RJ45 沉板4.2 SMT直脚带灯	
.XXX±0.15	.XX°± 1°		
核准APPROVE	审核 CHECK	制图 DRAW	角法 PROJ. 
ZILL	DDS	DOREN	张数 SHEET 1/1
			比例 SCALE 1:1 图纸 SIZE A4 版次 REV B