



CUSTOMER DRAWING

版次 REV	ECN编号	设变内容 MODIFICATION	日期 DATE	制图 DRAW	核准 APPROVE
A		初版发行	21-MAR-14	DOREN	DDS
B		UPDATE	01-JUL-17	DOREN	DDS

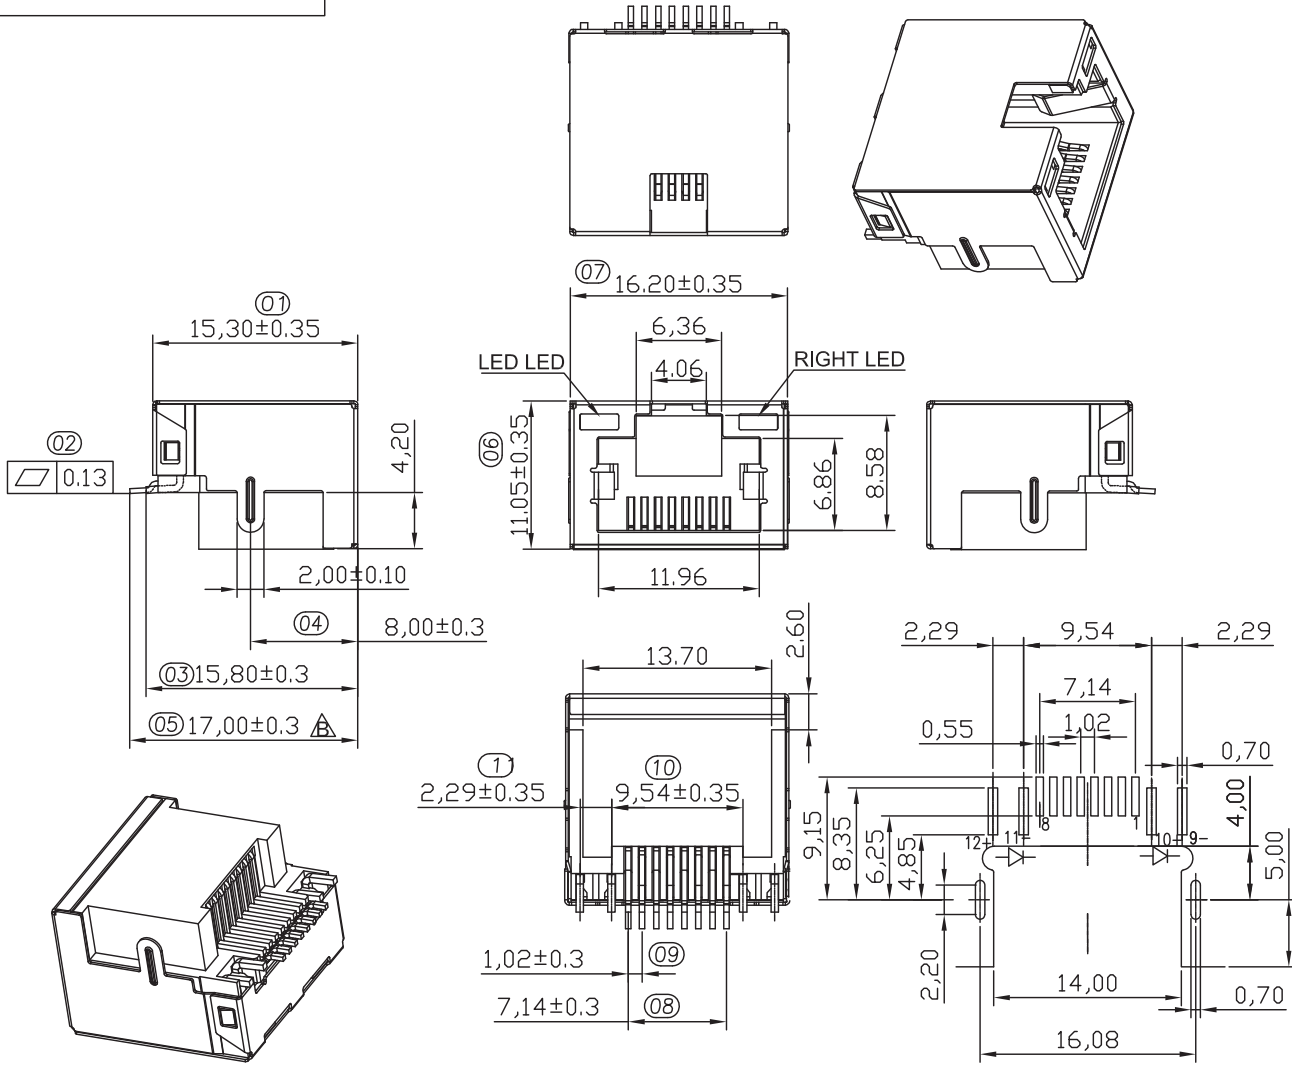

NOTES:
 1. HOUSING MATERIAL:GLASS FILLED POLYESTER UL94V-0.
 2. CONTACT MATERIAL:COPPER ALLOY,T=0.35.
 3. PLATING: GOLD PLATED ON CONTACT AREA, 100u"MIN. TIN PLATED ON SOLDERING AREA, 50u"MIN. NICKEL PLATED OVERALL.
 4. SHELL:COPPER ALLOY,T=0.20. 30u"MIN. NICKEL PLATED OVERALL.
 5. LED:T=0.50, TIN PLATED.
 ELECTRICAL:
 1. VOLTAGE RATING: 125V AC RMS.
 2. CURRENT RAIING: 1.5AMP.
 3. CONTACT RESISTANCE: 30MILLIOHMS MAX.
 4. INSULATION RESISTANCE: 500MEGOHMS MIN @500V DC.
 MECHANICAL:
 1. DURRABILITY: 750 CYCLES MIN.
 2.INSERTION FORCE : 22N MAX.
 3.REMOVAL FORCE(WITHOUT PLUG LOCK) : 22N MAX.
 ENVIRONMENTAL:
 1. STORAGE: -40°C~85°C
 2. OPERATION: 0°C~70°
 *Apply to the EU standards(ROSH)
 1. ①~⑩ FOR QIP DIM.

PCBLAYOUT TOP VIEW
TOL:±0.05

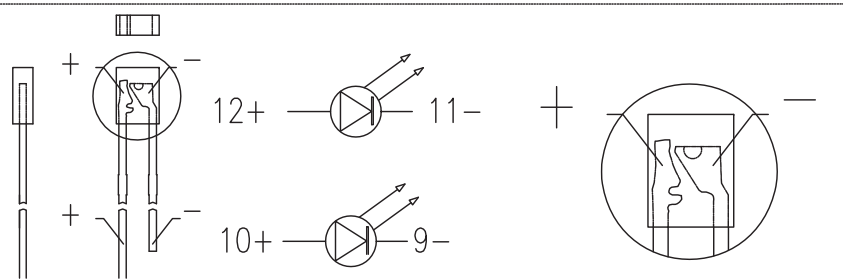

DIMENSION IN mm [Inch]		东莞市淞恺电子有限公司	
TOLERANCE UNLESS OTHERWISE SPECIFIED		料号 FILE NO.	
.X± 0.35	X°± 3°	RJ310-A21	
.XX± 0.25	.X°± 2°		
.XXX± 0.15	.XX°± 1°		
名称 TITLE		RJ45 沉板4.2 SMT直脚带灯	
核准 APPROVE	审核 CHECK	制图 DRAW	角法 PROJ.
ZILL	DDS	DOREN	张数 SHEET 1/1
		比例 SCALE 1:1 图纸 SIZE A4 版次 REV B	