


微動開關 MICRO Switches

◆ 編號規則 No rules

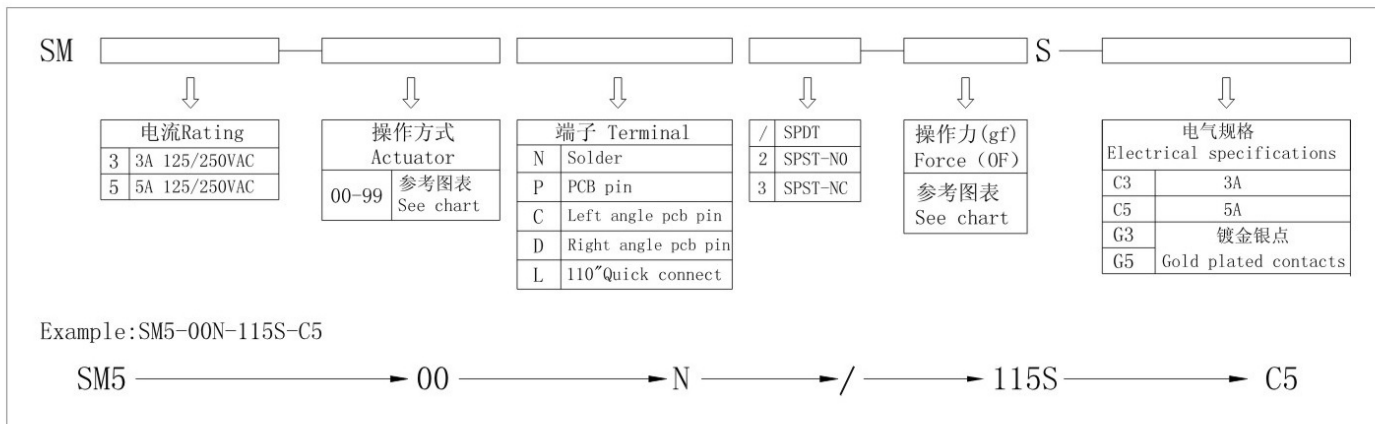

◆ 規格參數 Specifications

外形尺寸	Dimensions	19.8X10.6X6.3
SM3電氣規格	SM3 Electrical Specifications	3A 125VAC/250VAC
SM5電氣規格	SM5 Electrical Specifications	5A 125VAC/250VAC
接觸電阻(CR)	Contact resistance (CR)	≤100mΩ
機械壽命	Mechanical life	1,000,000
電氣壽命	Electrical life	10,000
絕緣電阻(IR)	Insulation Resistance (IR)	≥100MΩ DC500V
耐壓強度(WV)	Compressive strength (WV)	AC1000V 1 minute
操作溫度	Operating temperature	-25℃~+85℃
儲存濕度	Storage humidity	<85%RH


◆ 操作力表 Operating gauge

MODEL NO.	OPERATING FORCE(gf)									
SM**-00N	60	80	95	115	130	150	175	190	250	295
SM**-01N	17	20	25	30	35	40	45	50	60	75
SM**-02N	15	17	20	25	30	35	38	45	55	65
SM**-03N	10	13	15	18	20	25	28	35	45	53
SM**-04N	13	18	23	28	30	35	40	45	60	70
SM**-05N	14	20	25	30	34	40	45	50	68	75
SM**-06N	17	25	30	38	45	50	55	65	75	85
SM**-07N	6	8	10	14	16	18	20	22	25	35

备注: DICGU帝克可以订做其它操作力需求,欢迎前来洽谈咨询!

微動開關 MICRO Switches

◆ 端子類型 Terminal Type

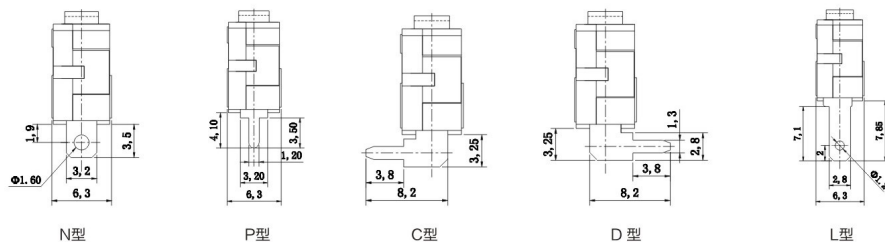

◆ 操作柄形狀及外型尺寸 the handle shape and dimensions

	AM05004-01		AM05004-04
	AM05004-02		AM05004-05
	AM05004-03		AM05004-06
	AM05004-07		AM05004-13

◆ 产品图档 Drawing Products

成品名MODEL	外形圖 Dimensions
SM3-00C/SM5-00C SM3&5 系列	Dimensions: 10.6, 2.9, 2.5, 7.5, 2, 9.5, 11.3±0.3mm, 11.9±0.3mm, 3.55, 2.8, 1.3, 3.8, 8.2, 2.25, 19.8, 5.1, 9.5, 1.85, 8.8, 7.3, 0.6, 2.4, 0.5, 1.60 SCHEMATIC: COM, NO, NC

微動開關 MICRO Switches

◆ 产品图档 Drawing Products

成品名MODEL	外形圖 Dimensions
SM3-00L/SM5-00L SM3&5 系列	Dimensions: 10.6, 2.9, 2.5, 7.5, 2, 9.5, 11.3±0.3mm, 11.9±0.3mm, 3.55, 7.1, 7.65, 2.8, 6.3, 19.8, 5.1, 9.5, 1.85, 8.8, 7.3, 0.6, 2.4, 0.5, 1.60 SCHEMATIC: COM, NO, NC
SM3-00N/SM5-00N SM3&5 系列	Dimensions: 10.6, 2.9, 2.5, 7.5, 2, 9.5, 11.3±0.3mm, 11.9±0.3mm, 3.55, 1.9, 3.2, 6.3, 19.8, 5.1, 9.5, 1.85, 8.8, 7.3, 0.6, 2.4, 0.5, 1.60 SCHEMATIC: COM, NO, NC
SM3-00P/SM5-00P SM3&5 系列	Dimensions: 10.6, 2.9, 2.5, 7.5, 2, 9.5, 11.3±0.3mm, 11.9±0.3mm, 3.55, 4.10, 3.50, 19.8, 5.1, 9.5, 1.85, 8.8, 7.3, 0.6, 2.4, 0.5, 1.60 SCHEMATIC: COM, NO, NC
SM3-01N/SM5-01N SM3&5 系列	Dimensions: 10.6, 2.9, 2.5, 7.5, 2, 9.5, 11.3±0.3mm, 11.9±0.3mm, 3.55, 4, 1.9, 3.2, 6.3, 19.8, 5.1, 9.5, 1.85, 8.8, 7.3, 0.6, 2.4, 0.5, 1.60 SCHEMATIC: COM, NO, NC