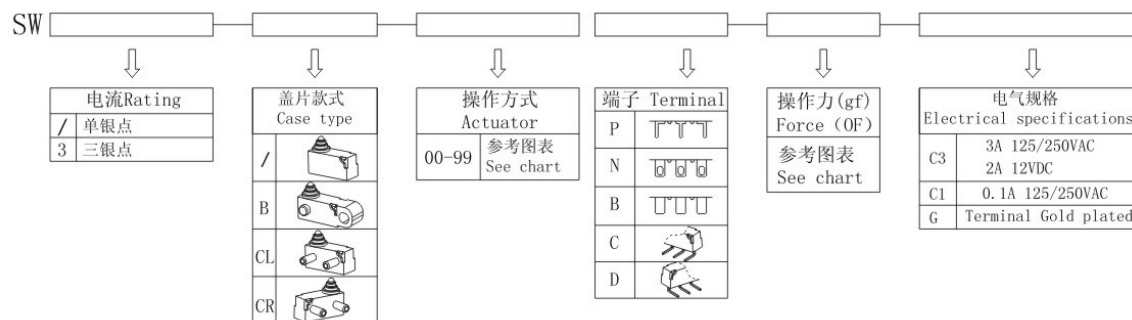


微動開關 MICRO Switches

◆ 編號規則 No rules



Example: SW3-CL00P-70-C3

SW3 → CL → 00 → P → 70 → C3

◆ 操作方式 Operation mode

按钮强度: 置开关于垂直状态, 直接动作按钮, 驱动强度3kgf Max, 时间为1分钟。


使用尺寸请参照左图尺寸, 不可过压 (如右图)。

Button tolerance to force:


Place the switch vertically, and enforce Max 3KG for 1 Min right on the button center.

Please refer to below left side drawing as the correct application;

whereas the right side drawing represents the false one.

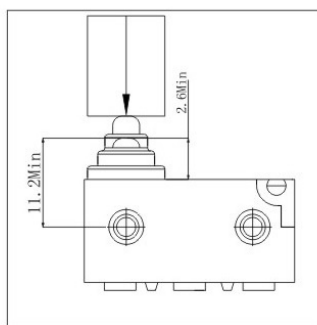

Right

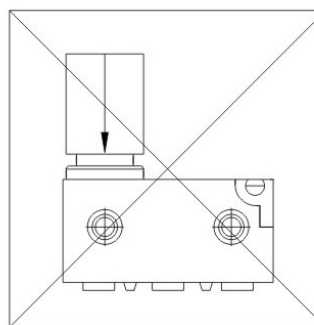








Wrong

◆ 規格參數 Specifications

外形尺寸	Dimensions	13.3X6.5X5.3
SW5電氣規格	SW5 Electrical Specifications	12VDC/2A, 42VDC/0.5, 24VDC/1A
接觸電阻(CR)	Contact resistance (CR)	≤100mΩ
機械壽命	Mechanical life	000,000
電氣壽命	Electrical life	10,000
絕緣電阻(IR)	Insulation Resistance (IR)	≥100MΩ DC500V
耐壓強度(WV)	Compressive strength (WV)	AC600V 1 minute
操作溫度	Operating temperature	-25℃~+85℃
儲存濕度	Storage humidity	<85%RH
防水性能	Waterproof	IP67

微動開關 MICRO Switches

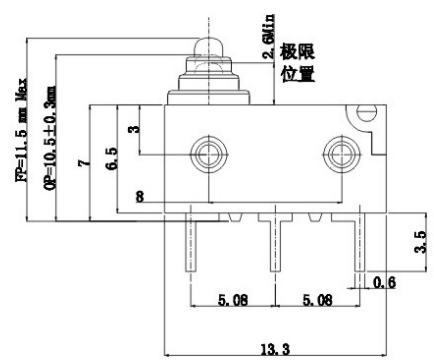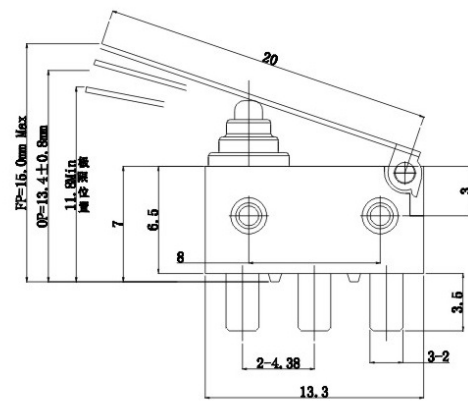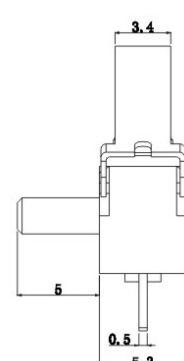◆ 产品图档 Drawing Products

成品名MODEL	外形圖 Dimensions
SW3-CL00P-70-C3 	  
SW3-CL01N-50-C3 	  
SW3-00N 	