

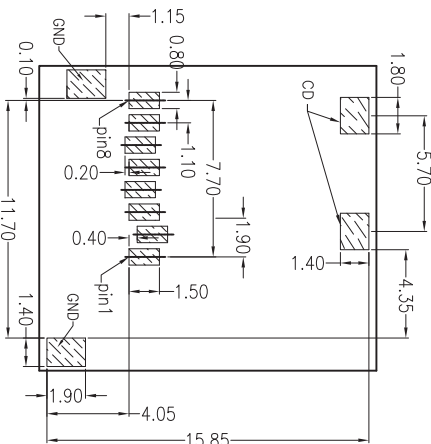

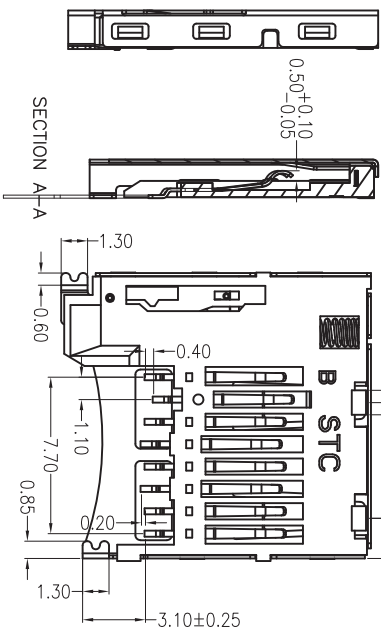


REV.	DESCRIPTION	APPD	DATE

- NOTES:
- 1.MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V 0,COLOR:BLACK.
CONTACT: COPPER ALLOYS.
COVER: COPPER ALLOYS OR STEEL.
- 2.PLATING:
UNDERPLATE: NICKEL.
CONTACT AREA: GOLD OVER NICKEL.
SOLDER AREA: TIN OVER NICKEL.
- 3.MULTIMEDIA CARD COMPATIBLE

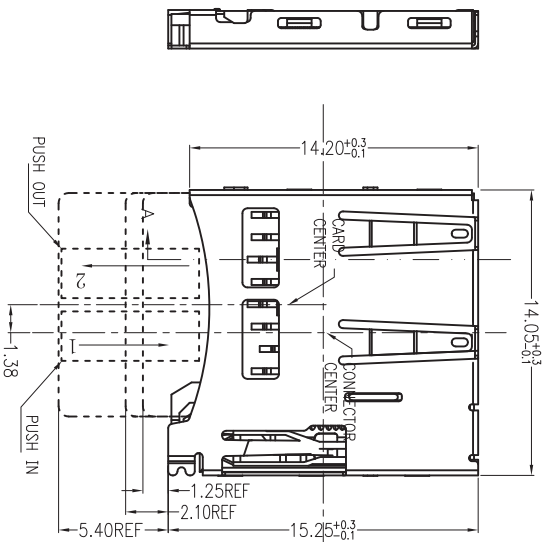

PIN NO.	NAME	TYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLK	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(BIT1)



RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

PART NO: JH22-S1S1-2000-A		MATERIAL:		东莞市浩程电子科技有限公司			
MODEL NO:		FINISH:					
UNIT: MM	SIZE: A4	COLOR:					
TOLERANCES: GENERAL X.X=±0.35 X.XX=±0.25 X.XXX=±0.15 X.XX=±2.0°		DR: 杨凯 0416710					
CHK:		DWG NO: FP-100098		TITLE: T-FLASH内焊 PUSH B Type			
APP:		SCALE: 1:1		SHEET: 1 OF 2		REV: B/1	
							