


微動開關 MICRO Switches

◆ 編號規則 No rules

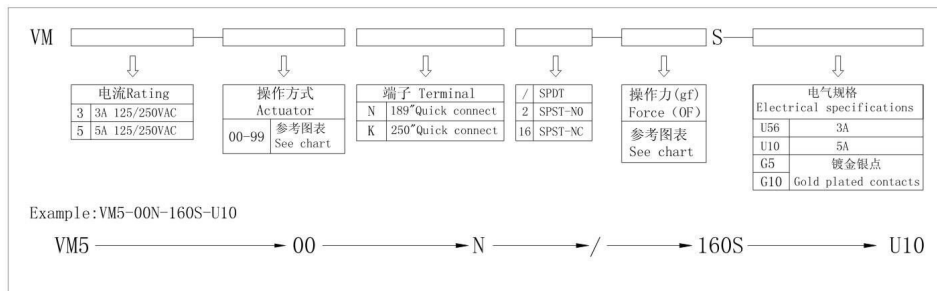

◆ 規格參數 Specifications

外圍尺寸	External dimensions	19.8x10.6x6.3
SM3電氣規格	SM3 Electrical Specifications	3A 125VAC/250VAC
SM5電氣規格	SM5 Electrical Specifications	5A 125VAC/250VAC
接觸電阻(CR)	Contact resistance (CR)	≤100mΩ
機械壽命	Mechanical life	1,000,000
電氣壽命	Electrical life	10,000
絕緣電阻(IR)	Insulation Resistance (IR)	≥100MΩ DC500V
耐壓強度(WV)	Compressive strength (WV)	AC1000V 1 minute
操作溫度	Operating temperature	-25℃~+85℃
儲存濕度	Storage humidity	<85%RH


◆ 操作力表 Operating gauge

MODEL NO.	OPERATING FORCE(gf)				
VM3-00N/VM5-00N	60	80	110	160	250
VM3-01N/VM5-01N	60	80	110	160	250
VM3-02N/VM5-02N	25	32	40	70	110
VM3-03N/VM5-03N	12	20	25	40	60
VM3-04N/VM5-04N	28	35	45	80	125
VM3-05N/VM5-05N	60	80	110	160	250
VM3-06N/VM5-06N	28	35	45	80	125


备注: DICGU帝克可以订做其它操作力需求,欢迎前来洽谈咨询!

微動開關 MICRO Switches


◆ 端子類型 Terminal Type

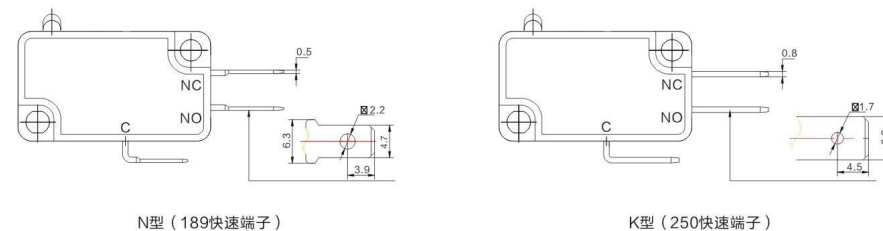

◆ 操作柄形狀及外型尺寸 the handle shape and dimensions




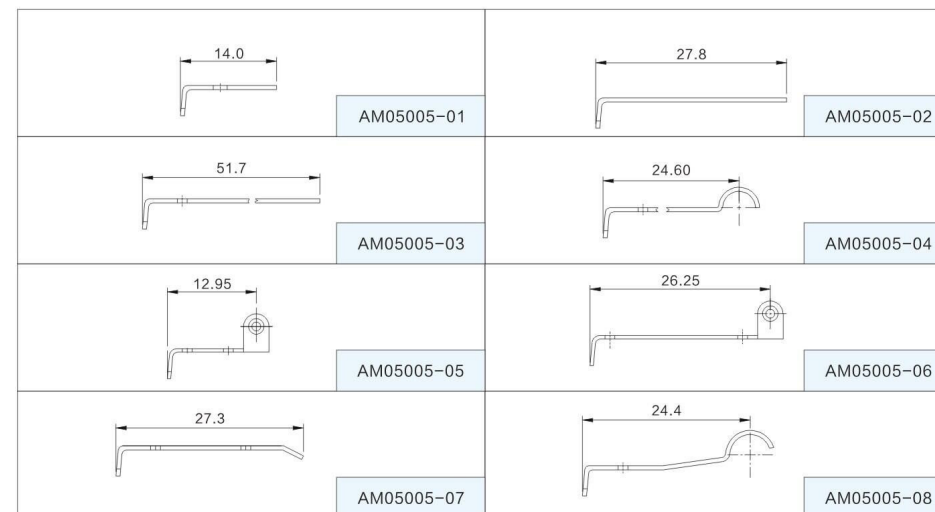


◆ 結構示意圖 Schematic

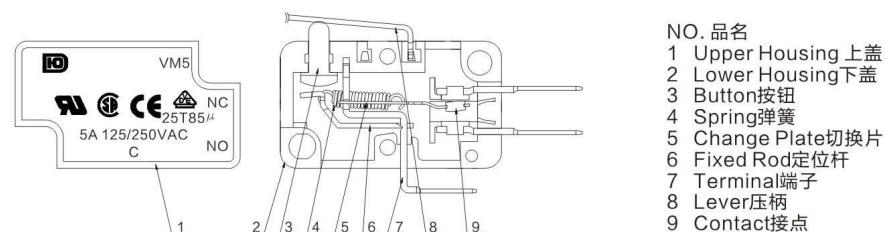

微動開關 MICRO Switches

◆ 產品圖檔 Drawing Products

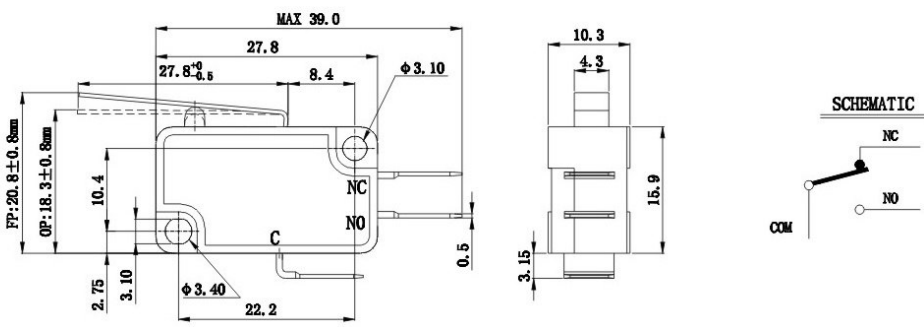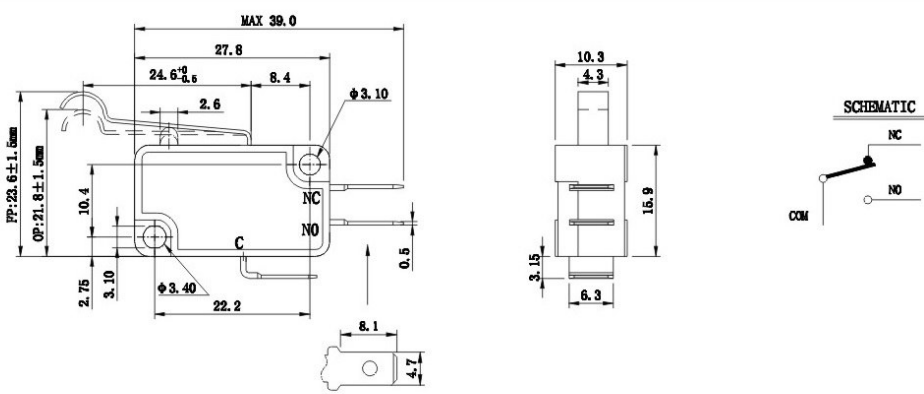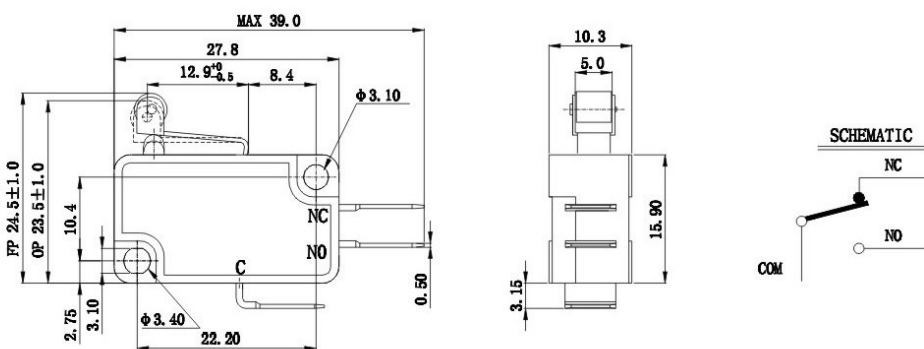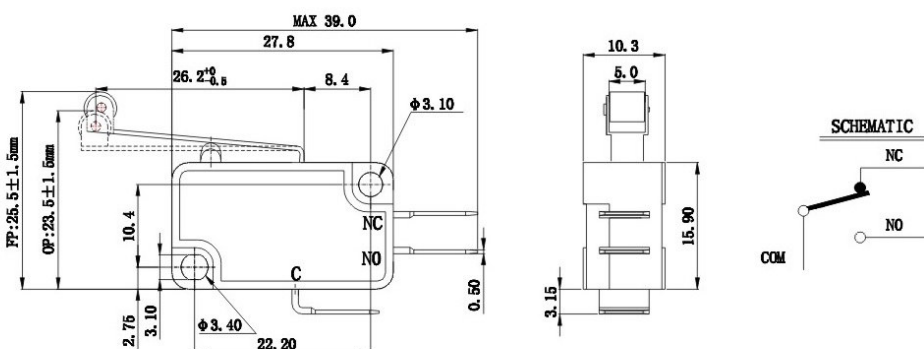成品名MODEL	外形圖 Dimensions
VM3-02N/VM5-02N 	
VM 系列	
VM3-04N/VM5-04N 	
VM 系列	
VM3-05N/VM5-05N 	
VM 系列	
VM3-06N/VM5-06N 	
VM 系列	