

MATERIALS

Housing/Handle	Glass-filled PBT,UL 94 —V0
O-Ring	Silicone rubber
Termination	Hard gold flash over nickel plated on phosphor bronze


ELECTRICAL

Operating voltage	24 V DC maximum
Switching current	100 mA maximum
Carrying current	0.5 A maximum
Contact resistance	100 m Ω maximum
Insulation resistance	1,000 M Ω minimum
Dielectric strength	300 V AC for 1 minute

ENVIRONMENTAL


Operating temperature	-10°C to +70°C
Soldering temperature	250 $\pm$ 5°C for 5 seconds
LIFE	10,000 detent operations

HOW TO ORDER

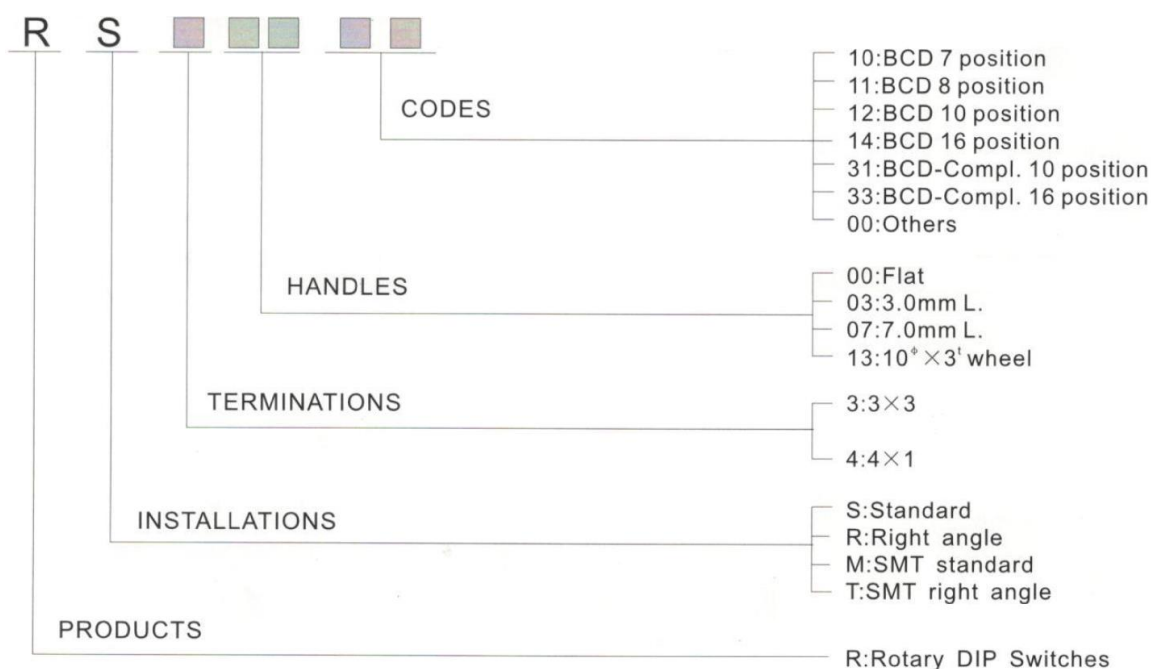


ФУЧЕН




Units:mm
(1mm=0.03937 in)






Recommend P.C.B.
Drilling Size




RS300




RS307

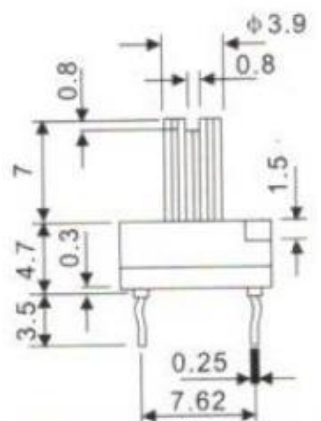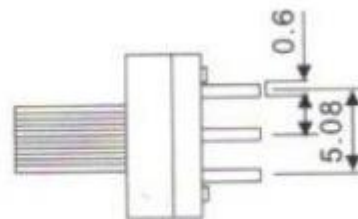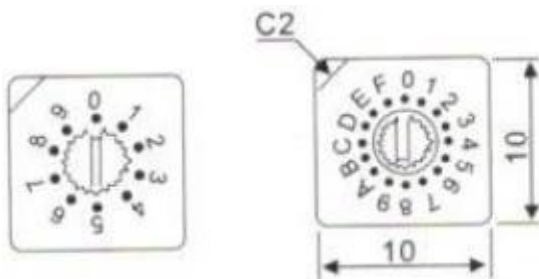


Recommend P.C.B.
Drilling Size

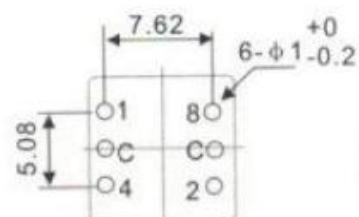




ФУЧЕН

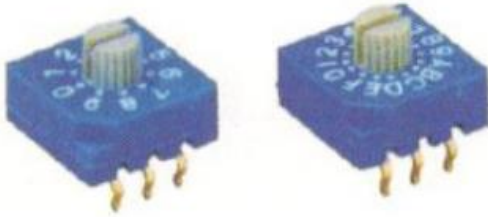


RS303

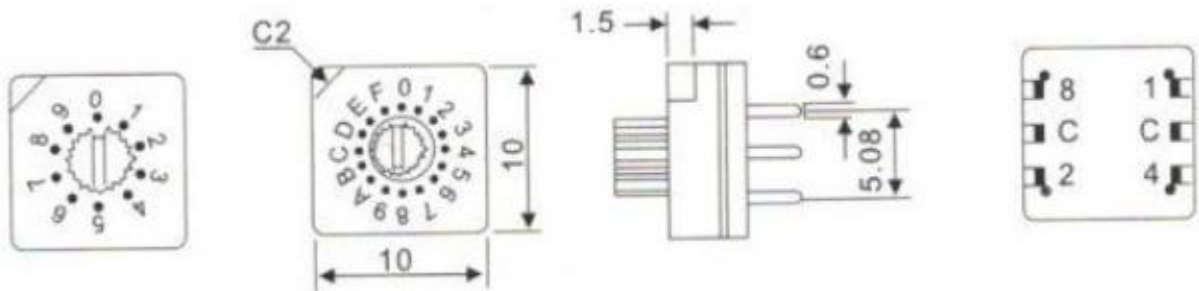




Recommend P.C.B.
Drilling Size

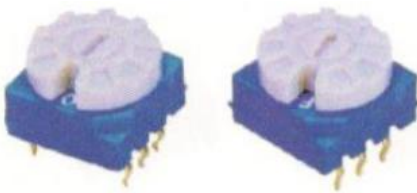


RS313





Recommend P.C.B.
Drilling Size

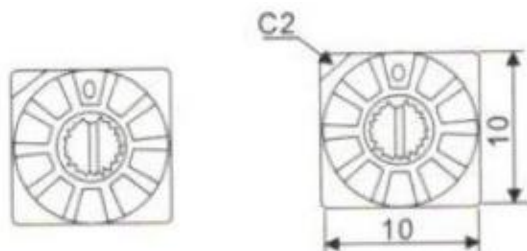

ФУЧЕН

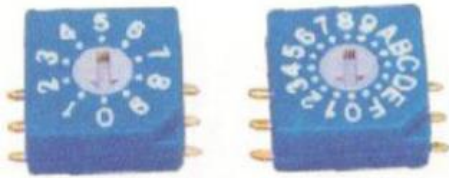


RM300

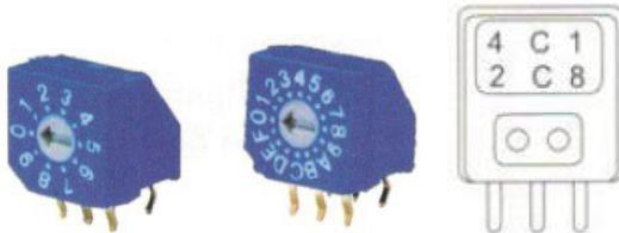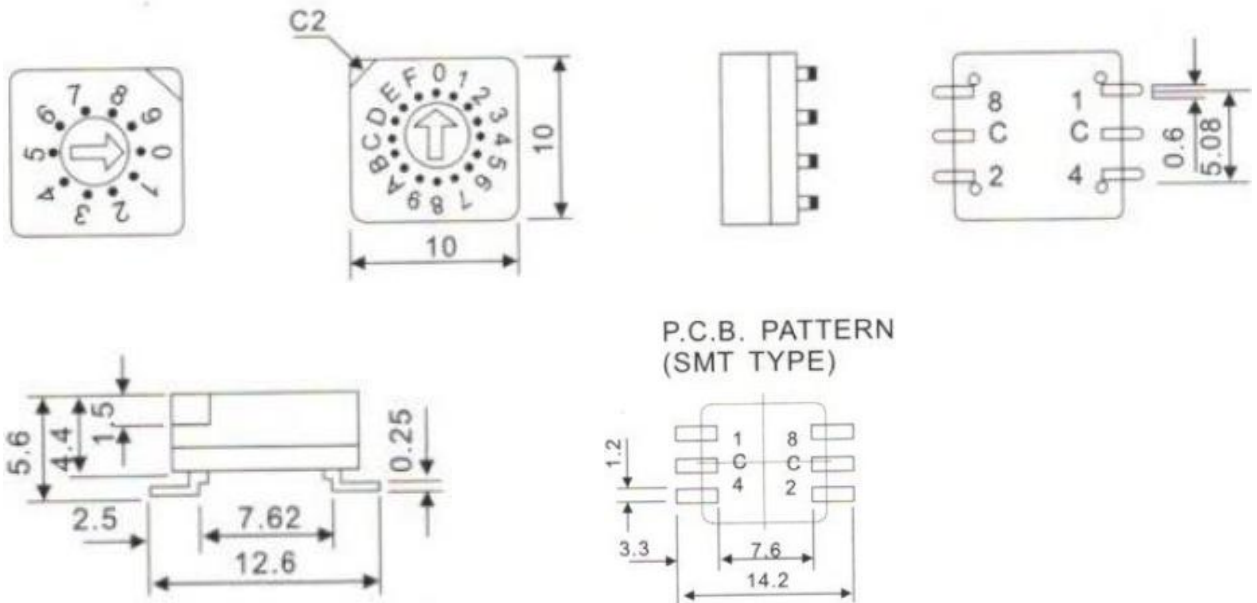


Recommend P.C.B
Drilling Size



RR300

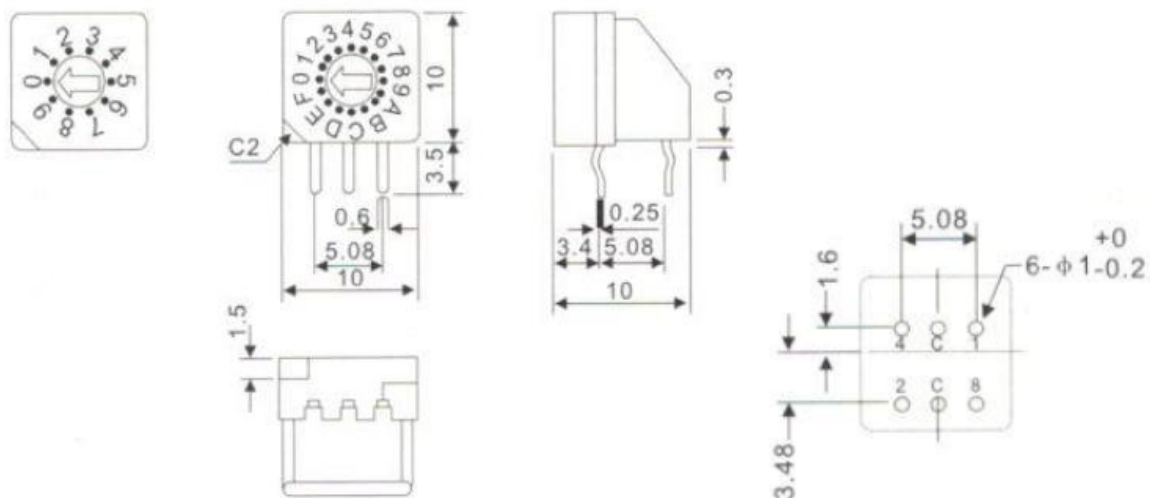


ФУЧЕН

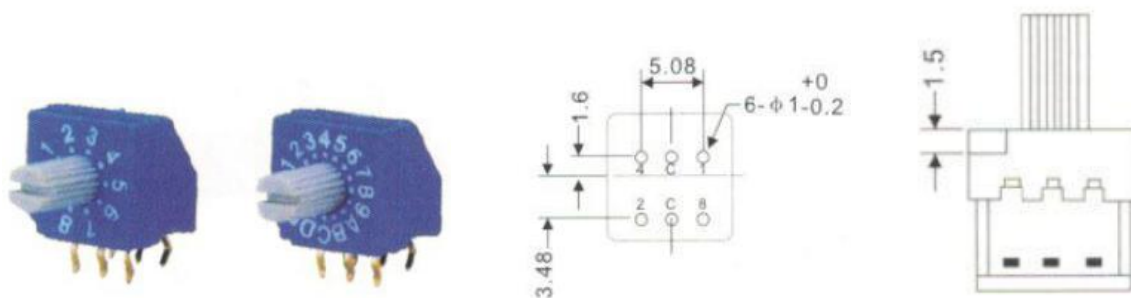


RR307

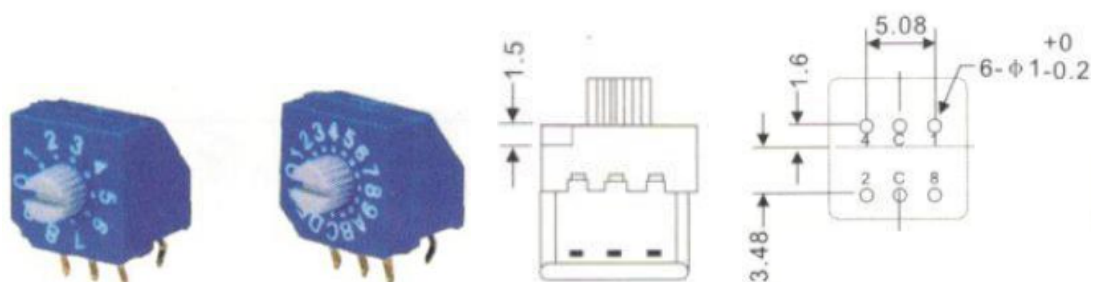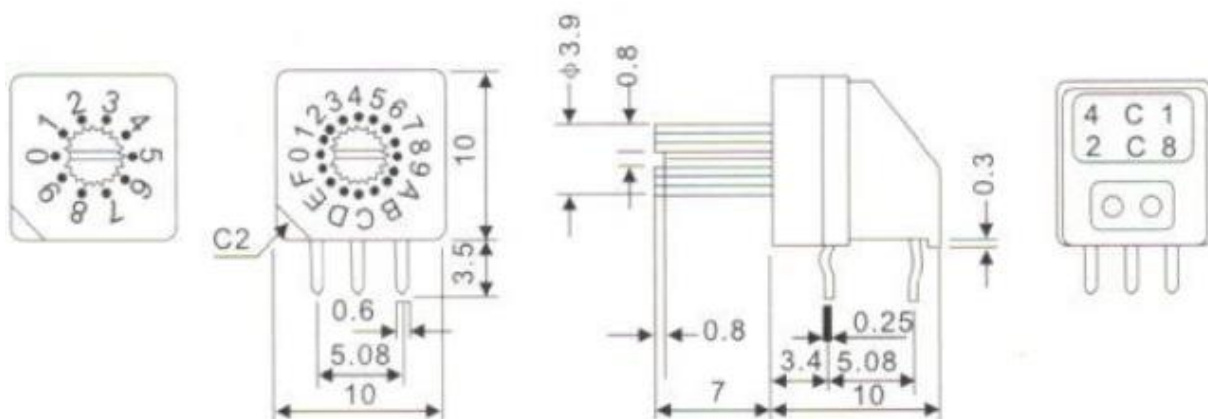



RR303

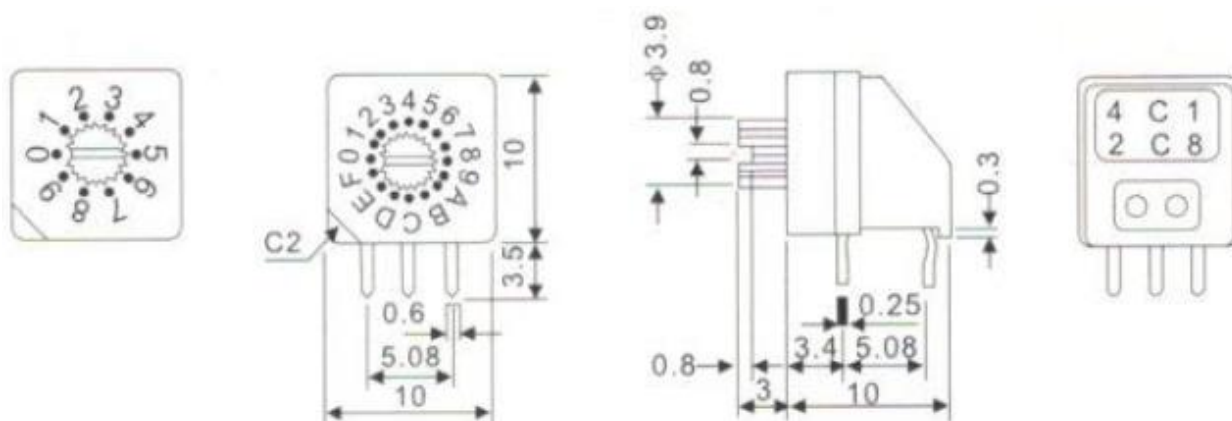


ФУЧЕН

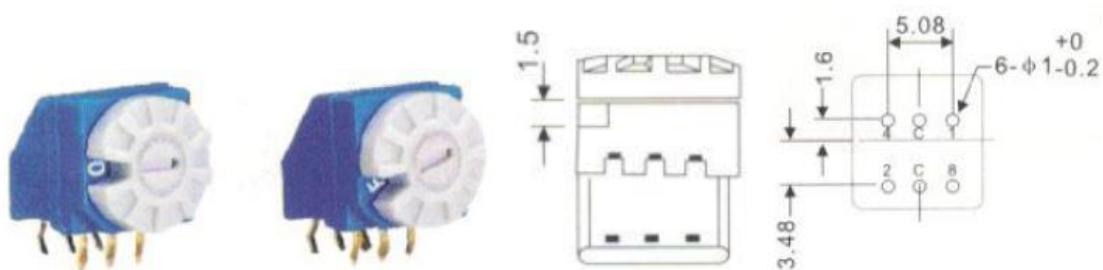


RR313

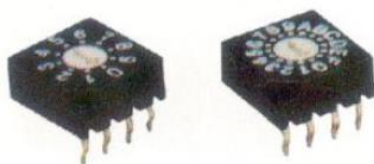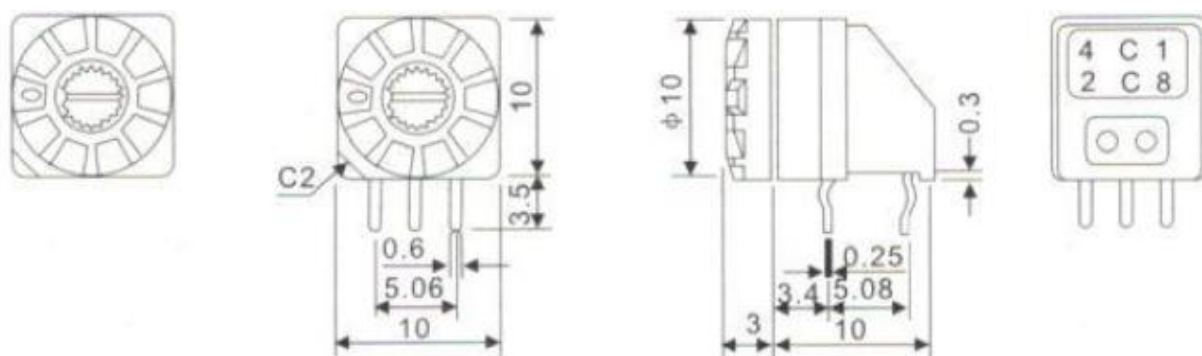



RS400

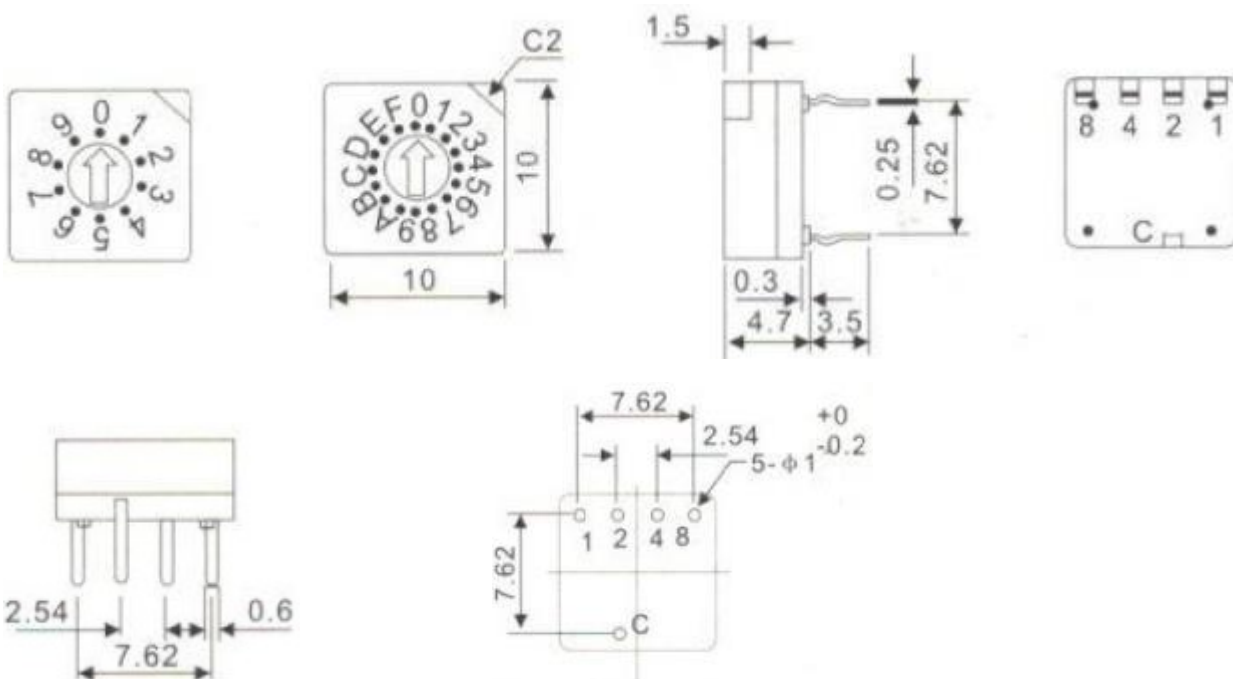


ФУЧЕН

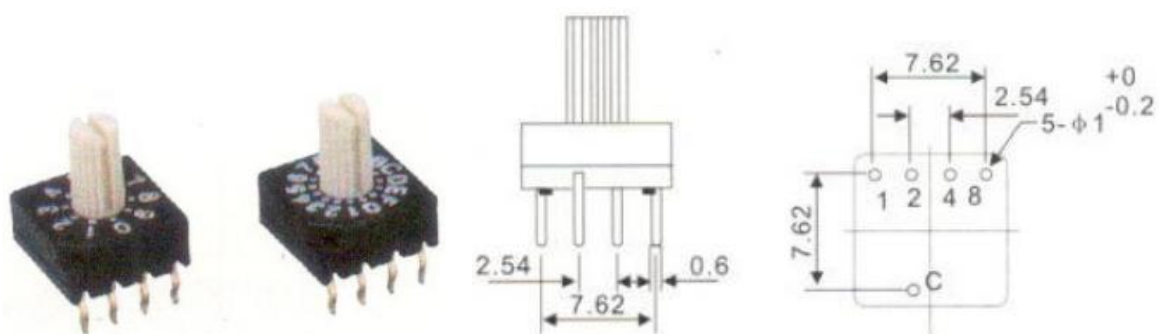


RS407

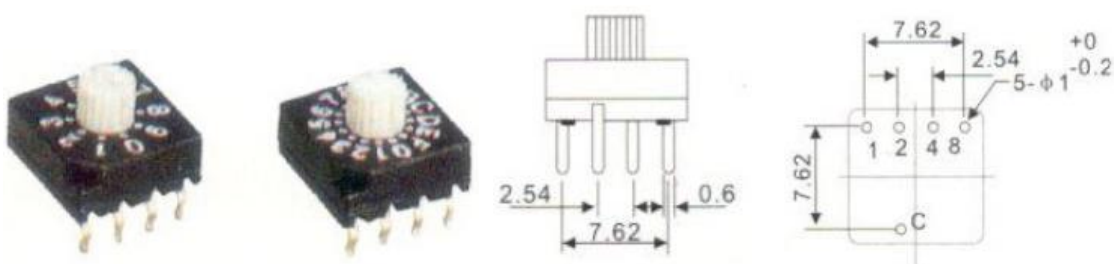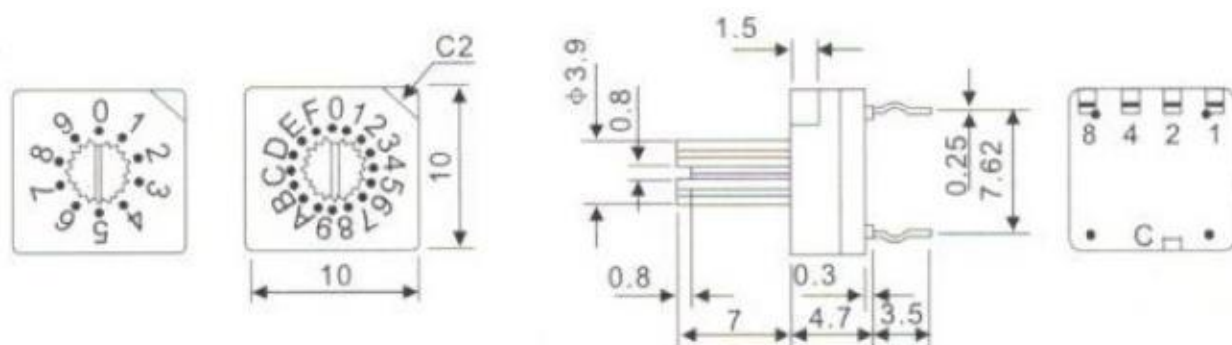



RS403

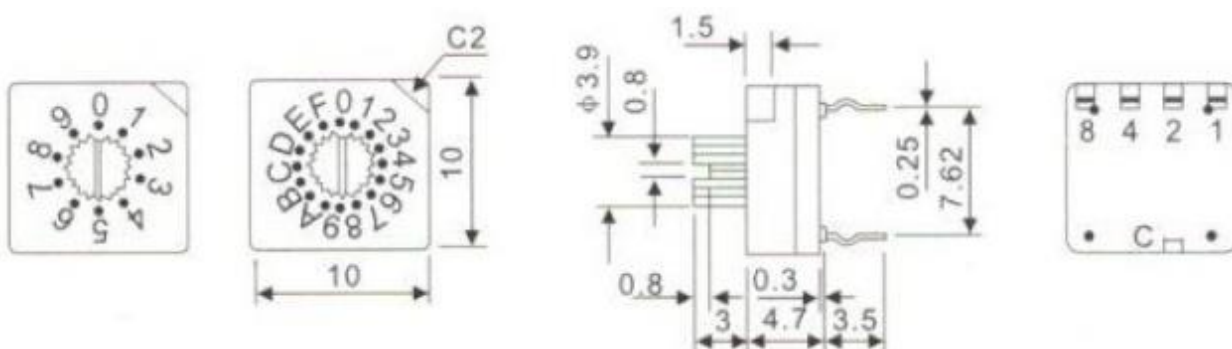

ФУЧЕН

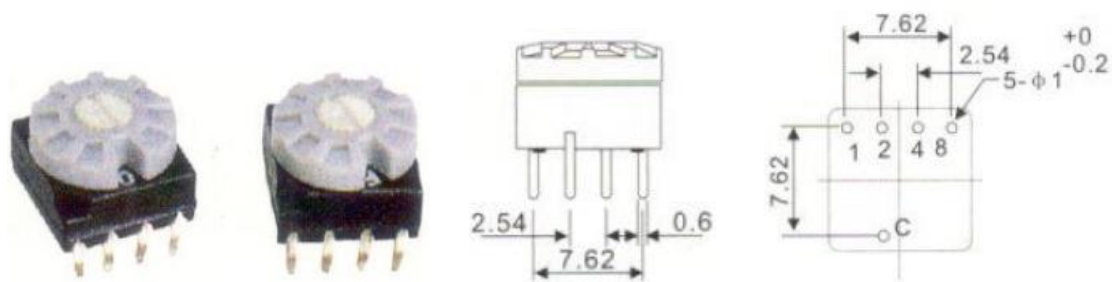

RS413

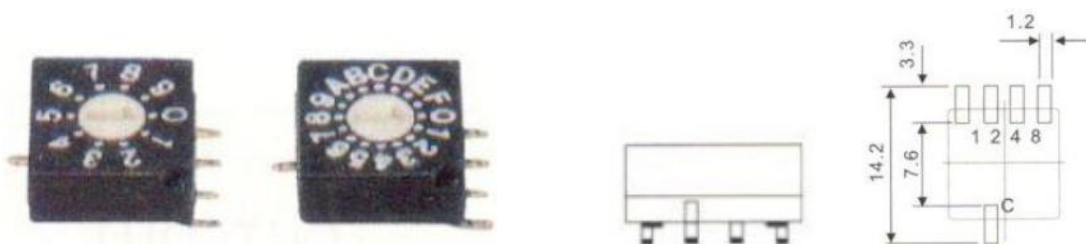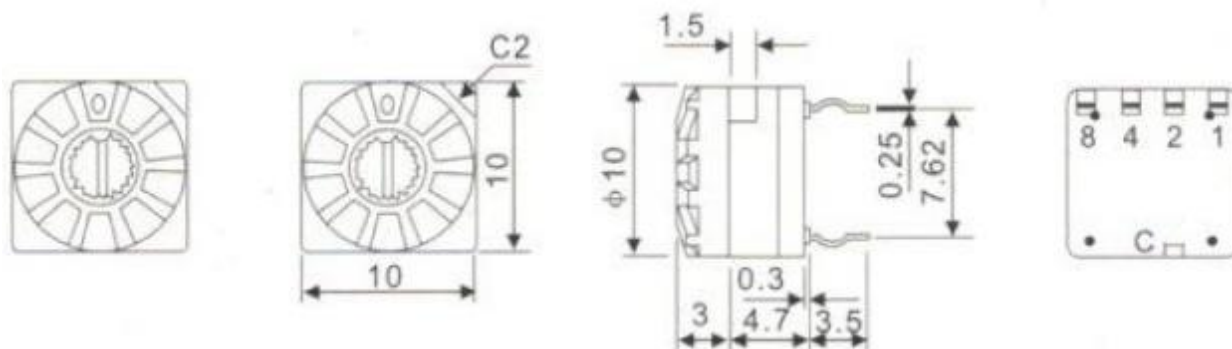

RM400

