

HOW TO ORDER

● SPECIFICATION

Rating: 10A 250VAC, 15A 125VAC**Insulation resistance:** DC 500V 200M Ω or more**Contact resistance:** DC 24V 1A 20m Ω or less**Withstand voltage:** AC 1500V OR MORE

PU□□□□-□□

MODEL NO.: 703

703A

703B

704-1

704-1A

705

705A

705B

706-1

706-1A

TERMINATIONS: H1

H2

H3

H4

H5


SWITCH FUNCTION

NO. POLES	MODEL NO.	SWITCH FUNCTION		CONNECTED TERMINALS	
		POS.1	POS.2	POS.1	POS.2
					
SPST	PU703	ON	OFF	1-3	—
	PU703A	OFF	(ON)	1-3	—
	PU703B	ON	(OFF)	1-3	—
SPDT	PU704-1	ON	ON	1-2	2-3
	PU704-1A	ON	(ON)	1-2	2-3
DPST	PU705	ON	OFF	1-3,4-6	—
	PU705A	OFF	(ON)	1-3,4-6	—
	PU705B	ON	(OFF)	1-3,4-6	—
DPDT	PU706-1	ON	ON	1-2,4-5	2-3,5-6
	PU706-1A	ON	(ON)	1-2,4-5	2-3,5-6


MOM=MOMENTARY

TERMINATION OPTIONS


H1




H2




H3



H4






H5






LOP SERIES Pushbutton Switches






SPST
PU703-H5

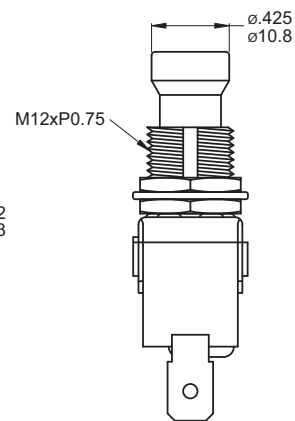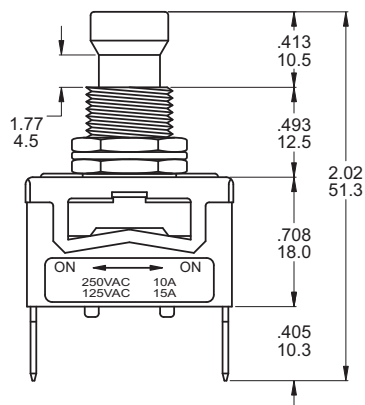

SPDT
PU704-1-H5

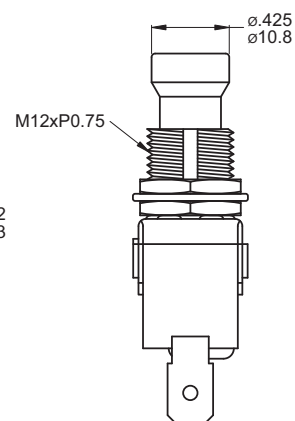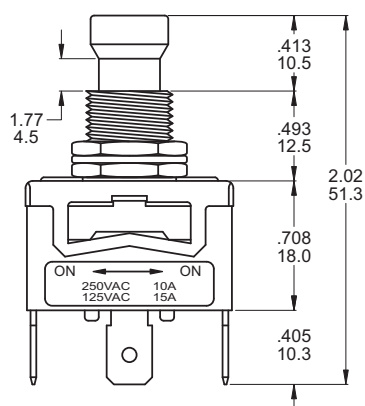

DPST
PU705-H5

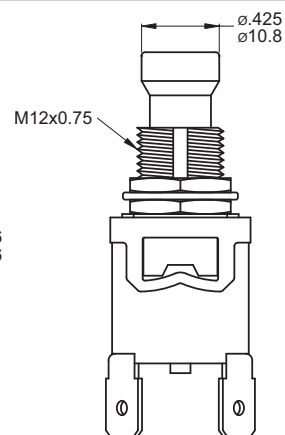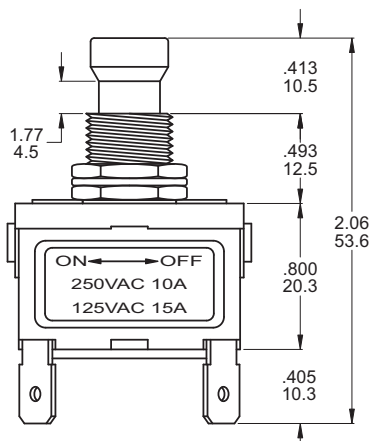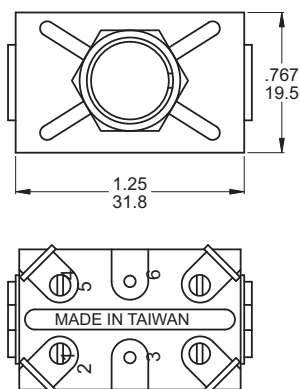

DPDT
PU706-1-H5

